

# EMC Test Report

**Project No.** : 1609C160  
**Equipment** : 23.8”(60.5cm)LCD Monitor  
**Model Name** : (1) 245C7Q, (2) 245C7QJSB, (3) 245C7Q\*\*\*\*\*  
 (\*=A-Z,a-z,0-9,/ ,or blank)  
**Applicant** : TPV Electronics (Fujian) Co., Ltd.  
**Address** : Rongqiao Economic and Technological Development  
 Zone, Fuqing City, Fujian Province, P.R. China

**Date of Receipt** : Sep. 20, 2016  
**Date of Test** : Sep. 20, 2016 ~ Sep. 28, 2016  
**Issued Date** : Sep. 30, 2016  
**Tested by** : BTL Inc.

Testing Engineer :   
(Lucky Mao)

Technical Manager :   
(Bill Zhang)

**Authorized Signatory** :   
(Steven Lu)

**BTL INC.**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



### Declaration

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>REPORT ISSUED HISTORY</b>	<b>6</b>
<b>1 . CERTIFICATION</b>	<b>7</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>8</b>
2.1 TEST FACILITY	10
2.2 MEASUREMENT UNCERTAINTY	10
<b>3 . GENERAL INFORMATION</b>	<b>12</b>
3.1 GENERAL DESCRIPTION OF EUT	12
3.2 DESCRIPTION OF TEST Modes	13
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
3.4 DESCRIPTION OF SUPPORT UNITS	15
3.5 EUT OPERATING CONDITIONS	15
<b>4 . EMC EMISSION TEST</b>	<b>16</b>
4.1 RADIATED EMISSION	16
4.1.1 LIMITS	16
4.1.2 MEASUREMENT INSTRUMENTS LIST	17
4.1.3 TEST PROCEDURE	18
4.1.4 DEVIATION FROM TEST STANDARD	19
4.1.5 TEST SETUP	19
4.1.6 MEASUREMENT DISTANCE	20
4.1.7 EUT OPERATING CONDITIONS	20
4.1.8 TEST RESULTS (UP TO 1 GHZ)	21
4.1.9 TEST RESULTS (ABOVE 1 GHZ)	31
4.2 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS	41
4.2.1 LIMITS	41
4.2.2 MEASUREMENT INSTRUMENTS LIST	41
4.2.3 TEST PROCEDURE	42
4.2.4 DEVIATION FROM TEST STANDARD	42
4.2.5 TEST SETUP	42
4.2.6 EUT OPERATING CONDITIONS	42
4.2.7 TEST RESULTS	43
4.3 HARMONIC CURRENT EMISSIONS TEST	53
4.3.1 LIMITS	53
4.3.2 MEASUREMENT INSTRUMENTS LIST	53
4.3.3 TEST PROCEDURE	54
4.3.4 DEVIATION FROM TEST STANDARD	54
4.3.5 TEST SETUP	54
4.3.6 EUT OPERATING CONDITIONS	54
4.3.7 TEST RESULTS	55

<b>Table of Contents</b>	<b>Page</b>
<b>4.4 VOLTAGE CHANGES, VOLTAGE FLUCTUATIONS AND FLICKER TEST</b>	<b>58</b>
4.4.1 LIMITS	58
4.4.2 MEASUREMENT INSTRUMENTS LIST	58
4.4.3 TEST PROCEDURE	58
4.4.4 DEVIATION FROM TEST STANDARD	58
4.4.5 TESTSETUP	59
4.4.6 EUT OPERATING CONDITIONS	59
4.4.7 TEST RESULTS	60
<b>5 . EMC IMMUNITY TEST</b>	<b>61</b>
5.1 STANDARD COMPLIANCE/SERVIRITY LEVEL/CRITERIA	61
5.2 GENERAL PERFORMANCE CRITERIA	63
5.3 GENERAL PERFORMANCE CRITERIA TEST SETUP	63
5.4 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)	64
5.4.1 TEST SPECIFICATION	64
5.4.2 MEASUREMENT INSTRUMENTS	64
5.4.3 TEST PROCEDURE	64
5.4.4 DEVIATION FROM TEST STANDARD	65
5.4.5 TEST SETUP	65
5.4.6 TEST RESULTS	66
5.5 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)	70
5.5.1 TEST SPECIFICATION	70
5.5.2 MEASUREMENT INSTRUMENTS	70
5.5.3 TEST PROCEDURE	70
5.5.4 DEVIATION FROM TEST STANDARD	70
5.5.5 TEST SETUP	71
5.5.6 TEST RESULTS	72
5.6 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT/BURST)	73
5.6.1 TEST SPECIFICATION	73
5.6.2 MEASUREMENT INSTRUMENTS	73
5.6.3 TEST PROCEDURE	73
5.6.4 DEVIATION FROM TEST STANDARD	73
5.6.5 TEST SETUP	74
5.6.6 TEST RESULTS	75
5.7 SURGE IMMUNITY TEST	76
5.7.1 TEST SPECIFICATION	76
5.7.2 MEASUREMENT INSTRUMENTS	76
5.7.3 TEST PROCEDURE	76
5.7.4 DEVIATION FROM TEST STANDARD	77
5.7.5 TEST SETUP	77
5.7.6 TEST RESULTS	78

<b>Table of Contents</b>	<b>Page</b>
<b>5.8 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY</b>	
<b>RADIO-FREQUENCY FIELDS TEST (CS)</b>	<b>79</b>
5.8.1 TEST SPECIFICATION	79
5.8.2 MEASUREMENT INSTRUMENTS	79
5.8.3 TEST PROCEDURE	79
5.8.4 DEVIATION FROM TEST STANDARD	79
5.8.5 TEST SETUP	80
5.8.6 TEST RESULTS	81
<b>5.9 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)</b>	<b>82</b>
5.9.1 TEST SPECIFICATION	82
5.9.2 MEASUREMENT INSTRUMENTS	82
5.9.3 TEST PROCEDURE	82
5.9.4 DEVIATION FROM TEST STANDARD	82
5.9.5 TEST SETUP	83
5.9.6 TEST RESULTS	84
<b>5.10 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS</b>	
<b>IMMUNITY TEST</b>	<b>85</b>
5.10.1 TEST SPECIFICATION	85
5.10.2 MEASUREMENT INSTRUMENTS	85
5.10.3 TEST PROCEDURE	85
5.10.4 DEVIATION FROM TEST STANDARD	85
5.10.5 TEST SETUP	85
5.10.6 TEST RESULTS	86
<b>6 . EUT TEST PHOTO</b>	<b>87</b>

**REPORT ISSUED HISTORY**

Issued No.	Description	Issued Date
BTL-EMC-1-1609C160	Original Issue.	Sep. 30, 2016

## 1. CERTIFICATION

Equipment : 23.8"(60.5cm)LCD Monitor  
Brand Name : PHILIPS  
Model Name : (1) 245C7Q, (2) 245C7QJSB, (3) 245C7Q\*\*\*\*\* (\*=A-Z,a-z,0-9,/,or blank)  
Applicant : TPV Electronics (Fujian) Co., Ltd.  
Address : Rongqiao Economic and Technological Development Zone, Fuqing City, Fujian Province, P.R. China  
Date of Test : Sep. 20, 2016 ~ Sep. 28, 2016  
Test Sample : Engineering Sample  
Standard(s) : EN 55032: 2012+AC:2013 Class B  
AS/NZS CISPR 32: 2015  
EN 61000-3-2: 2014 Class D  
EN 61000-3-3: 2013  
EN 55024: 2010+A1:2015  
EN 61000-4-2: 2009  
EN 61000-4-3: 2006+A1:2008+A2:2010  
EN 61000-4-4: 2012  
EN 61000-4-5: 2014  
EN 61000-4-6: 2014  
EN 61000-4-8: 2010  
EN 61000-4-11: 2004

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-EMC-1-1609C160) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Emission					
Standard(s)	Test Item		Limit	Judgment	Remark
EN 55032:2012+AC:2013 AS/NZS CISPR 32: 2015	Radiated emissions up to 1 GHz		Class B	PASS	-----
	Radiated emissions above 1 GHz		Class B	PASS	NOTE (2)
	Radiated emissions from FM receivers		-----	N/A	NOTE (1) NOTE (6)
	Conducted emissions AC mains power port		Class B	PASS	NOTE (7)
	Asymmetric mode conducted emissions	AAN	-----	N/A	NOTE (1) NOTE (8)
		Current Probe	-----	N/A	
		CVP	-----	N/A	
	Conducted differential voltage emissions		-----	N/A	NOTE (1) NOTE (9)

Standard	Test Item	Limit	Judgment	Remark
EN 61000-3-2	Harmonic current emissions	Class D	PASS	NOTE (3)
EN 61000-3-3	Voltage changes, voltage fluctuations and flicker		PASS	

Immunity EN 55024				
Section(s)	Test Item	Performance Criterion	Judgment	Remark
EN 61000-4-2	Electrostatic discharge immunity	B	PASS	
EN 61000-4-3	Radiated, radio-frequency, electromagnetic field immunity	A	PASS	
EN 61000-4-4	Electrical fast transient/burst immunity	B	PASS	
EN 61000-4-5	Surge immunity	B/C	PASS	NOTE (4)
EN 61000-4-6	Immunity to conducted disturbances, induced by radio-frequency fields	A	PASS	
EN 61000-4-8	Power frequency magnetic field immunity	A	PASS	
EN 61000-4-11	Voltage dips, short interruptions and voltage variations immunity	B / C / C	PASS	NOTE (5)



**NOTE:**

- (1) "N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is 170 MHz which does exceed 108 MHz, so the test will be performed.
- (3) If the power consumption is less than 75W, there is no limit applied.
- (4) Performance Criterion C for signal ports and telecommunication ports.  
Performance Criterion B for input d.c. power port and a.c. power ports.
- (5) Voltage Dips: >95% reduction – Performance Criterion B  
Voltage Dips: 30% reduction – Performance Criterion C  
Voltage Interruptions: >95% reduction – Performance Criterion C
- (6) If the EUT has FM function the test will be performed.
- (7) If the EUT has AC power mains port the test will be performed.
- (8)

Cable Type	Number of pairs	Measurement type	Procedures
Balanced Unscreened	1 (2 wire) ;2 (4 wire); 3 (6 wire) ;4 (8 wire)	Voltage	AAN
Balanced Unscreened	See a)	Voltage and Current	CP+CVP
Screened or Coaxial	n/a	Voltage	AAN
Screened or Coaxial	n/a	Voltage or Current	CP or CVP
Unbalanced cables	n/a	Voltage and Current	CP+CVP

Ports connected to cables with more than 4 balanced pairs or where the port is unable to function correctly when connected through an AAN.

- (9) If the EUT has tuner port the test will be performed.
- (10) The requirement followed by the client's specification.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2, The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%**.

### A. Conducted emissions AC mains power port measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C01	CISPR	150 kHz ~ 30MHz	3.16

### B. Radiated emissions up to 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB08 (10m)	CISPR	30MHz ~ 200MHz	V	4.66
		30MHz ~ 200MHz	H	4.64
		200MHz ~ 1,000MHz	V	4.88
		200MHz ~ 1,000MHz	H	4.86

### C. Radiated emissions above 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB08 (3m)	CISPR	1 ~ 6 GHz	4.26
		6 ~18 GHz	5.30

### D. Harmonic current emissions / Voltage changes, voltage fluctuations and flicker measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C01	EN 61000-3-2	Voltage	0.774
	EN 61000-3-3	Current	0.782

#### E. Immunity Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-SR02	EN 61000-4-2	Voltage(2kV/4kV/6kV/8kV/15kV/25kV/30kV)	1.0%
		Peak Current	6.0%
		30/60ns Current	6.0%
		Rise time	6.4%
DG-CB05	EN 61000-4-3	80MHz~1GHz	2.175 dB
DG-SR05	EN 61000-4-4	Impulse Voltage	4.0 %
		Impulse Rise Time	4.5 %
		Impulse duration Time	4.0 %
DG-SR05	EN 61000-4-5	Impulse Voltage	4.0 %
		Impulse Rise Time	4.5 %
		Impulse duration Time	4.0 %
DG-CB06	EN 61000-4-6	CDN: 150kHz~230MHz	2.509 dB
		EM Clamp: 150kHz~230MHz	3.094 dB
DG-SR05	EN 61000-4-8	Magnetic Field Level	3 %
DG-SR05	EN 61000-4-11	Impulse Amplitude	4 %
		Timing	3 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	23.8"(60.5cm)LCD Monitor
Brand Name	PHILIPS
Model Name	(1) 245C7Q, (2) 245C7QJSB, (3) 245C7Q***** (*=A-Z,a-z,0-9,/ ,or blank)
Model Difference	Different model distribute to different area
Power Source	DC voltage supplied from AC/DC adapter. Brand Name / Model Name: PHILIPS / ADPC1936
Power Rating	I/P: 100-240V~1.3A 50-60Hz O/P:19V---2.0A

Cable Type	Shielded Type	Ferrite Core	Length(m)	Note
D-SUB	Shielded	YES	1.8/1.5	Bonded two Ferrite Cores
Display	Shielded	NO	1.8/1.5	
HDMI	Shielded	NO	1.8/1.5	
AC Power Cord	Non-shielded	NO	1.8/1.5	1.8m is worst case Detachable (3 Pin)

**Note:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Power cable 1.8m and 1.5m length, worst case is Power cable 1.8m with  
D-SUB+Display+HDMI Cable 1.8m and 1.5m length testing and recording in test report.

### 3.2 DESCRIPTION OF TEST Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	D-SUB 1920*1080/60Hz
Mode 2	D-SUB 1280*1024/60Hz
Mode 3	D-SUB 640*480/60Hz
Mode 4	Display 1920*1080/60Hz
Mode 5	Display 1280*1024/60Hz
Mode 6	Display 640*480/60Hz
Mode 7	HDMI 1920*1080/60Hz
Mode 8	HDMI 1280*1024/60Hz
Mode 9	HDMI 640*480/60Hz
Mode 10	HDMI 1080P
Mode 11	HDMI 576P
Mode 12	HDMI 480I


For Mains Terminal Disturbance Voltage Test	
Final Test Mode	Description
Mode 1	D-SUB 1920*1080/60Hz
Mode 7	HDMI 1920*1080/60Hz
Mode 10	HDMI 1080P

For Radiated Disturbance Test	
Final Test Mode	Description
Mode 1	D-SUB 1920*1080/60Hz
Mode 7	HDMI 1920*1080/60Hz
Mode 10	HDMI 1080P

For Harmonics / Flicks Test	
Final Test Mode	Description
Mode 7	HDMI 1920*1080/60Hz

For EMS Test	
Final Test Mode	Description
Mode 7	HDMI 1920*1080/60Hz

### 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

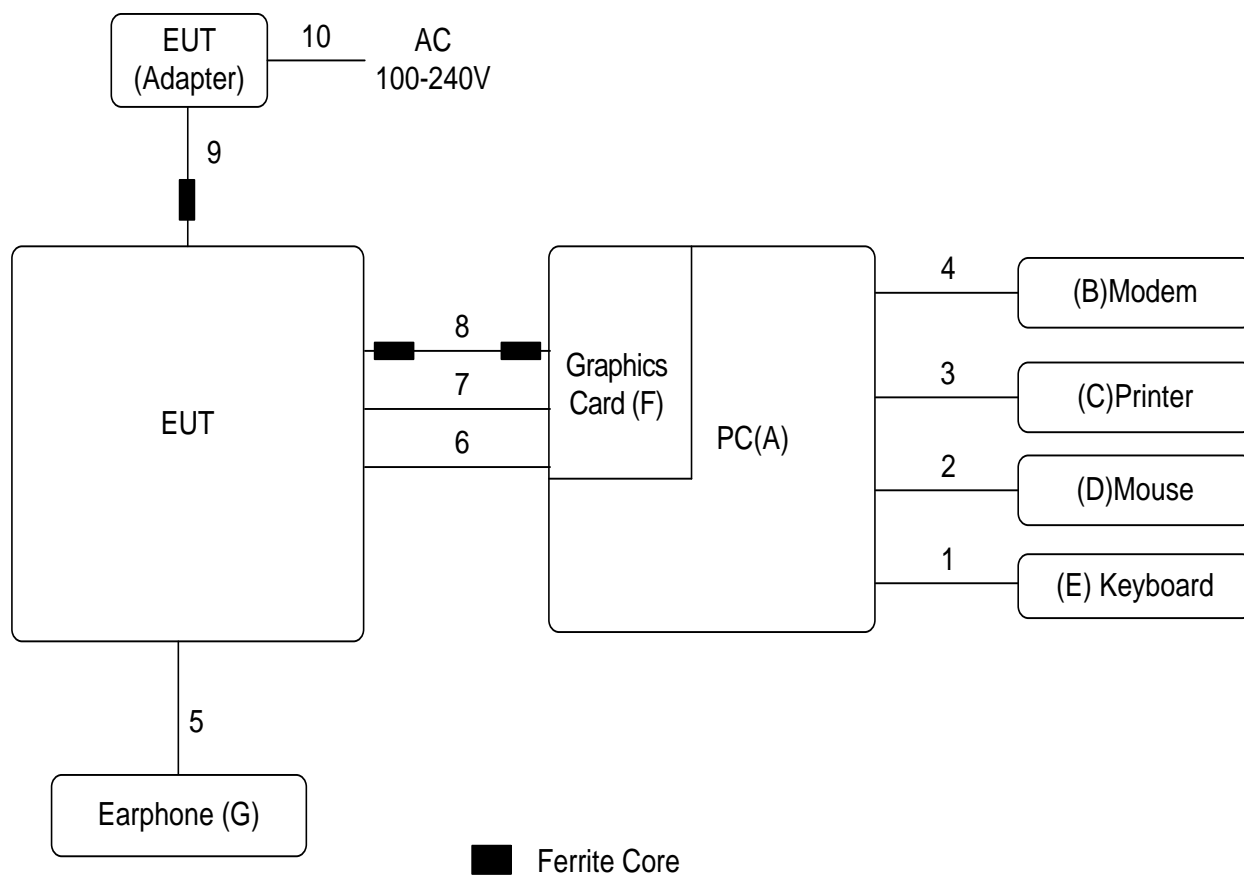

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	PC	DELL	VOSTRO 470	DOC	24454162837
B	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
C	Printer	SII	DPU-414	DOC	3018507 B
D	Mouse	DELL	MO28UOL	DOC	23-122591
E	Keyboard	DELL	SK-8815(L)	DOC	00975811
F	Graphics card	LEADTEK	LR2A5F	DOC	ALF7100123952
G	Earphone	Apple	N/A	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	USB Cable
3	YES	NO	1.5m	Parallel Cable
4	YES	NO	1.5m	RS232 Cable
5	NO	NO	1.2m	Audio Cable
6	YES	NO	1.8m/1.5m	HDMI Cable
7	YES	NO	1.8m/1.5m	Display Cable
8	YES	YES	1.8m/1.5m	D-SUB Cable
9	NO	YES	1.2m	DC Cable
10	NO	NO	1.8m/1.5m	AC Cable

### 3.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

## 4. EMC EMISSION TEST

### 4.1 RADIATED EMISSION

#### 4.1.1 LIMITS

Class A equipment up to 1000MHz

Table clause	Frequency MHz	Measurement		Class A limit dB(uV/m)
		Distance m	Detector type/bandwidth	OATS/SAC
A2.1	30-230	10	Quasi peak / 120 kHz	40
	230-1000			47
A2.2	30-230	3		50
	230-1000			57

Class A equipment above 1000MHz

Table clause	Frequency MHz	Measurement		Class A limit dB(uV/m)
		Distance m	Detector type/bandwidth	FSOATS
A3.1	1000-3000	3	Average / 1 MHz	56
	3000-6000			60
A3.2	1000-3000		Peak / 1 MHz	76
	3000-6000			80

Class B equipment up to 1000MHz

Table clause	Frequency MHz	Measurement		Class B limit dB(uV/m)
		Distance m	Detector type/bandwidth	OATS/SAC
A4.1	30-230	10	Quasi peak / 120 kHz	30
	230-1000			37
A4.2	30-230	3		40
	230-1000			47

Class B equipment above 1000MHz

Table clause	Frequency MHz	Measurement		Class B limit dB(uV/m)
		Distance m	Detector type/bandwidth	FSOATS
A5.1	1000-3000	3	Average / 1 MHz	50
	3000-6000			54
A5.2	1000-3000		Peak / 1 MHz	70
	3000-6000			74



**Notes:**

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value

**Required highest frequency for radiated measurement**

Highest internal frequency ( $F_x$ ) MHz	Highest measured frequency MHz
$F_x \leq 108$	1000
$108 < F_x \leq 500$	2000
$500 < F_x \leq 1000$	5000
$F_x > 1000$	5 <sup>th</sup> up to a maximum 6 GHz,

Note for FM and TV broadcast receiver,  $F_x$  is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.

#### 4.1.2 MEASUREMENT INSTRUMENTS LIST

**Up to 1GHz:**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	586	Feb. 04, 2017
2	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	587	Jan. 26, 2017
3	Pre-Amplifier	Mini-Circuits	EMC 9135	980284	Mar. 27, 2017
4	Pre-Amplifier	Mini-Circuits	EMC 9135	980283	Mar. 27, 2017
5	Receiver	Agilent	N9038A	MY54450004	Nov. 20, 2016
6	Test Cable	emci	LMR-400 (30MHz-1GHz)	C-23	Dec.31, 2016
7	Test Cable	emci	LMR-400 (30MHz-1GHz)	C-22	Dec.31, 2016
8	Receiver	Agilent	N9038A	MY53220133	Jun. 23, 2017
9	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
10	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.  
 All calibration period of equipment list is one year.

### Above 1GHz:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Horn Antenna	EMCO	3115	9605-4803	Mar. 27, 2017
2	Amplifier	Agilent	8449B	3008A0258 4	Oct. 11, 2016
3	Test Cable	emci	SUCOFLEX_15 m_5m(0.01GHz – 26.5GHz)	C-15/C-39	Dec. 31, 2016
4	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
5	Test Cable	emci	SUCOFLEX 102_8m(0.01GH z – 40GHz)	C-38	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A

Remark: “N/A” denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


#### 4.1.3 TEST PROCEDURE

- The measuring distance of 10 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz).
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).


#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation


#### 4.1.5 TEST SETUP

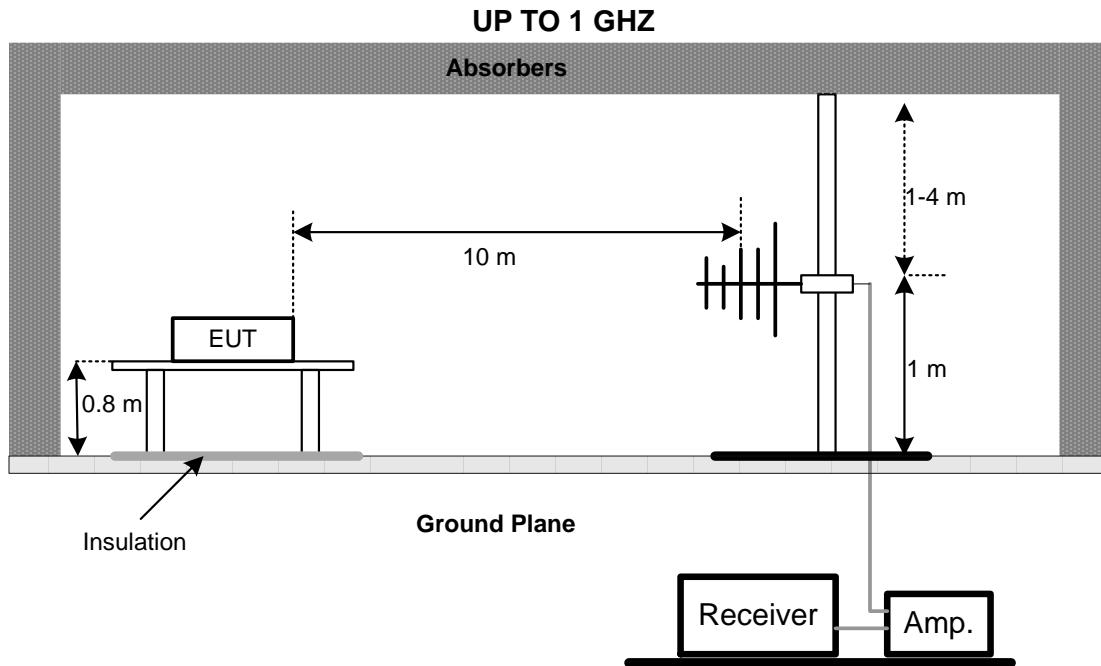

Note: The antenna can be moved between 1 to 4 meters above the ground.

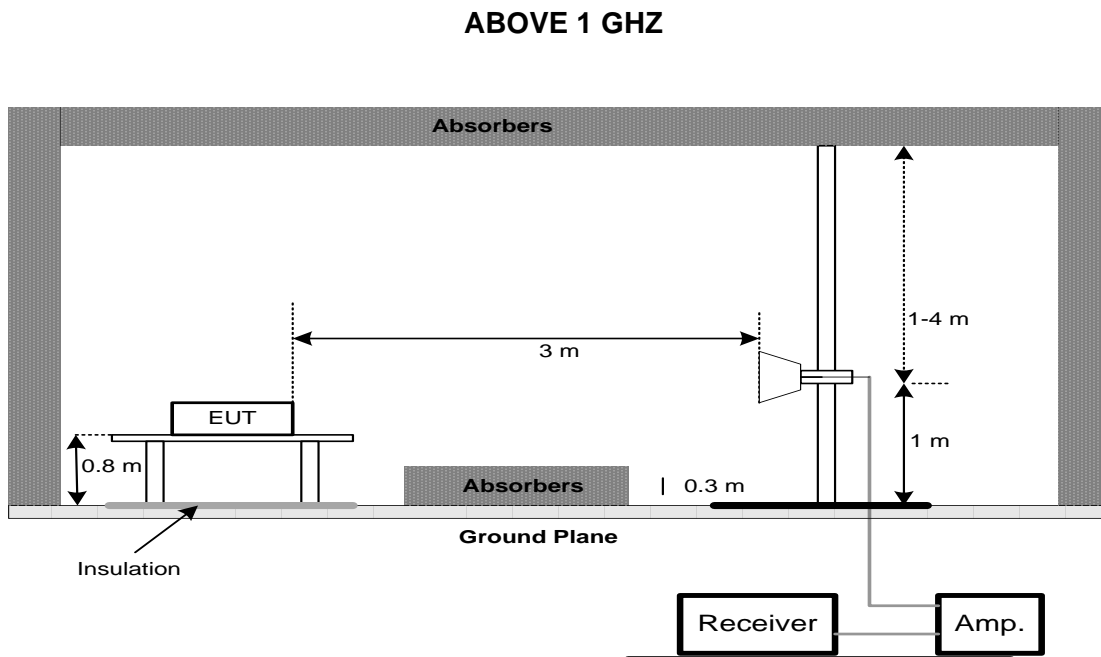

#### 4.1.6 MEASUREMENT DISTANCE

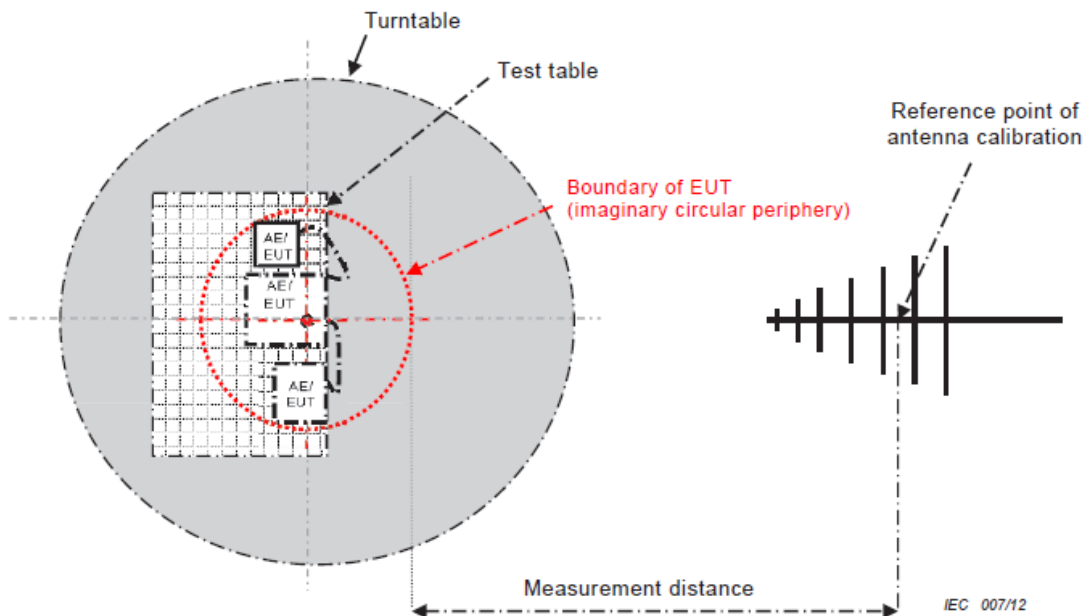

– 34 –

CISPR 32 © IEC:2012

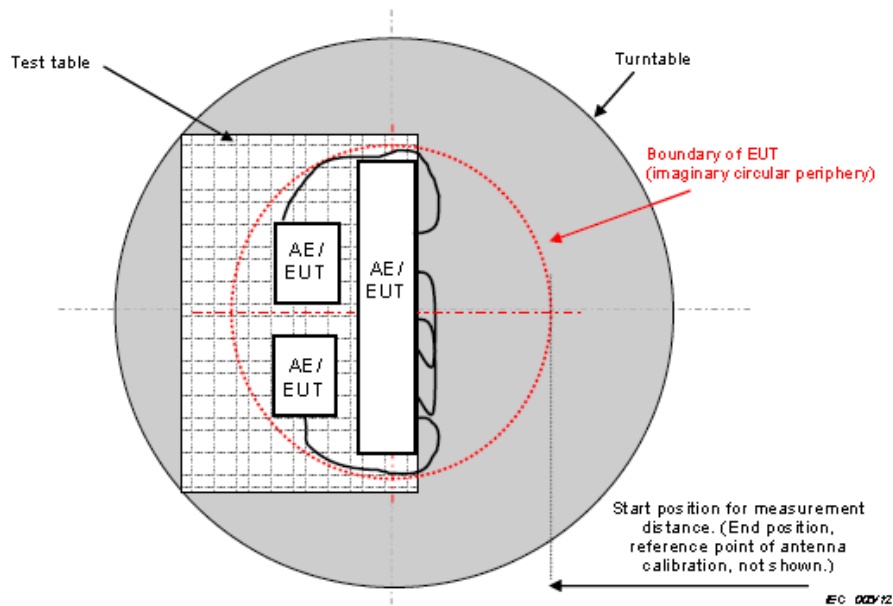


Figure C.2 – Boundary of EUT, Local AE and associated cabling


#### 4.1.7 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 3.3 unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.1.8 TEST RESULTS (UP TO 1 GHZ)

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	D-SUB 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		


80 dBuV/m

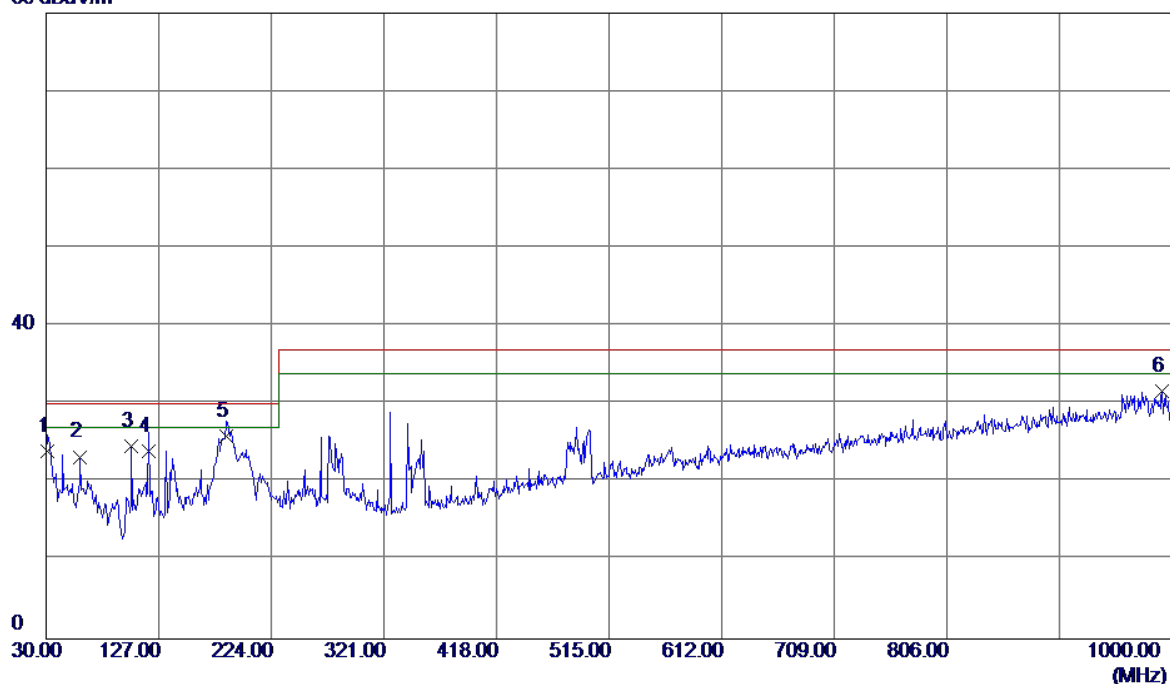

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	31.4550	42.20	-18.14	24.06	30.00	-5.94	QP
2	59.5850	39.99	-16.71	23.28	30.00	-6.72	QP
3	103.7200	44.42	-19.73	24.69	30.00	-5.31	QP
4	118.7550	41.99	-18.00	23.99	30.00	-6.01	QP
5 *	185.6850	43.24	-17.27	25.97	30.00	-4.03	QP
6	991.7550	32.60	-0.92	31.68	37.00	-5.32	QP


EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	D-SUB 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

80 dBuV/m

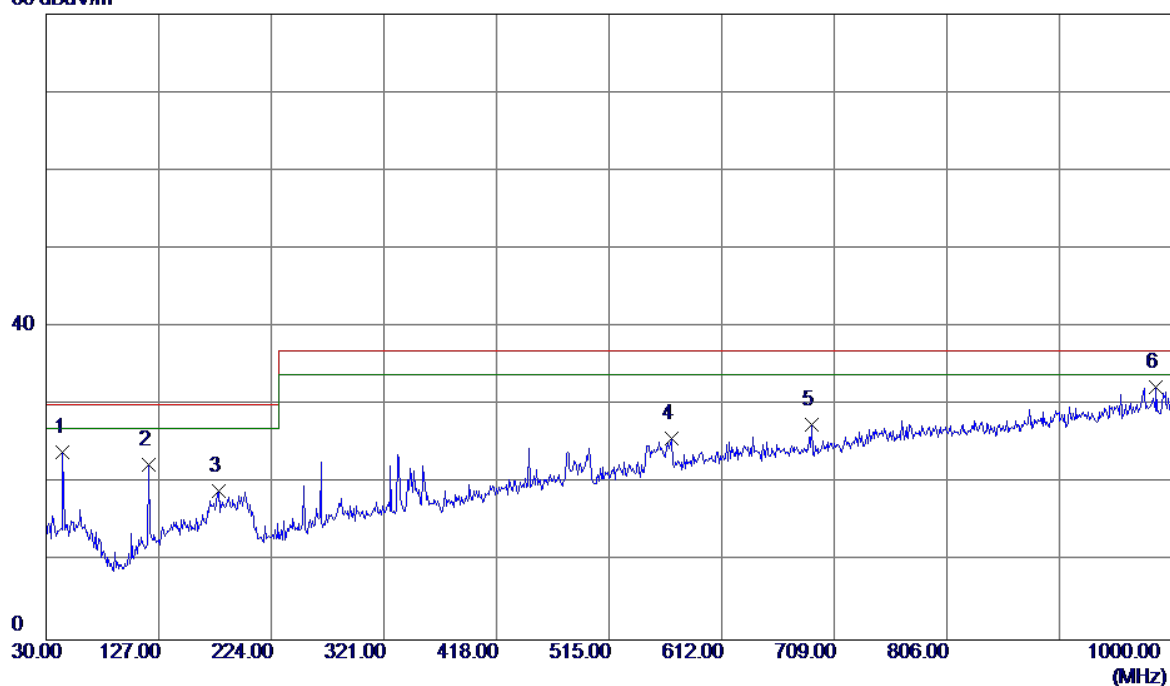


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	44.5500	40.68	-16.64	24.04	30.00	-5.96	QP
2	118.2700	40.26	-17.79	22.47	30.00	-7.53	QP
3	178.4100	35.46	-16.35	19.11	30.00	-10.89	QP
4	569.3200	33.02	-7.27	25.75	37.00	-11.25	QP
5	689.6000	32.91	-5.34	27.57	37.00	-9.43	QP
6 *	986.4200	32.45	-0.12	32.33	37.00	-4.67	QP

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

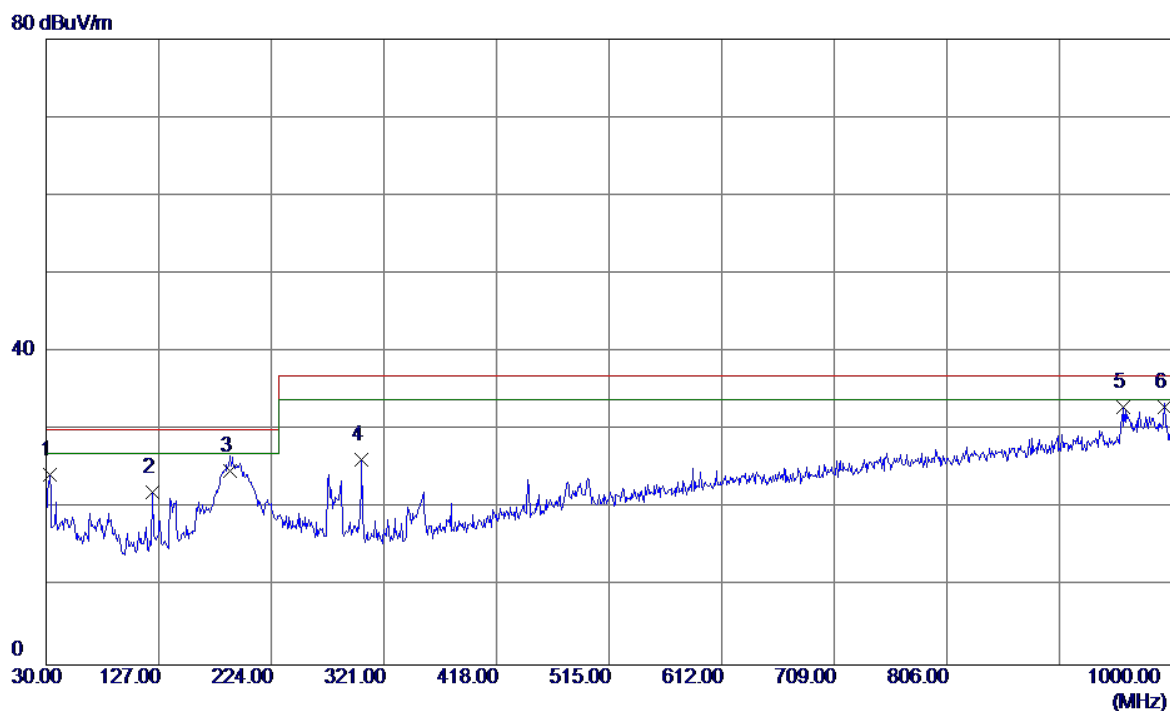

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	32.9100	42.33	-18.06	24.27	30.00	-5.73	QP
2	121.6650	39.76	-17.74	22.02	30.00	-7.98	QP
3	188.5950	42.29	-17.56	24.73	30.00	-5.27	QP
4	301.6000	40.21	-13.96	26.25	37.00	-10.75	QP
5 *	957.8050	34.21	-1.23	32.98	37.00	-4.02	QP
6	993.2100	33.80	-0.90	32.90	37.00	-4.10	QP


EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

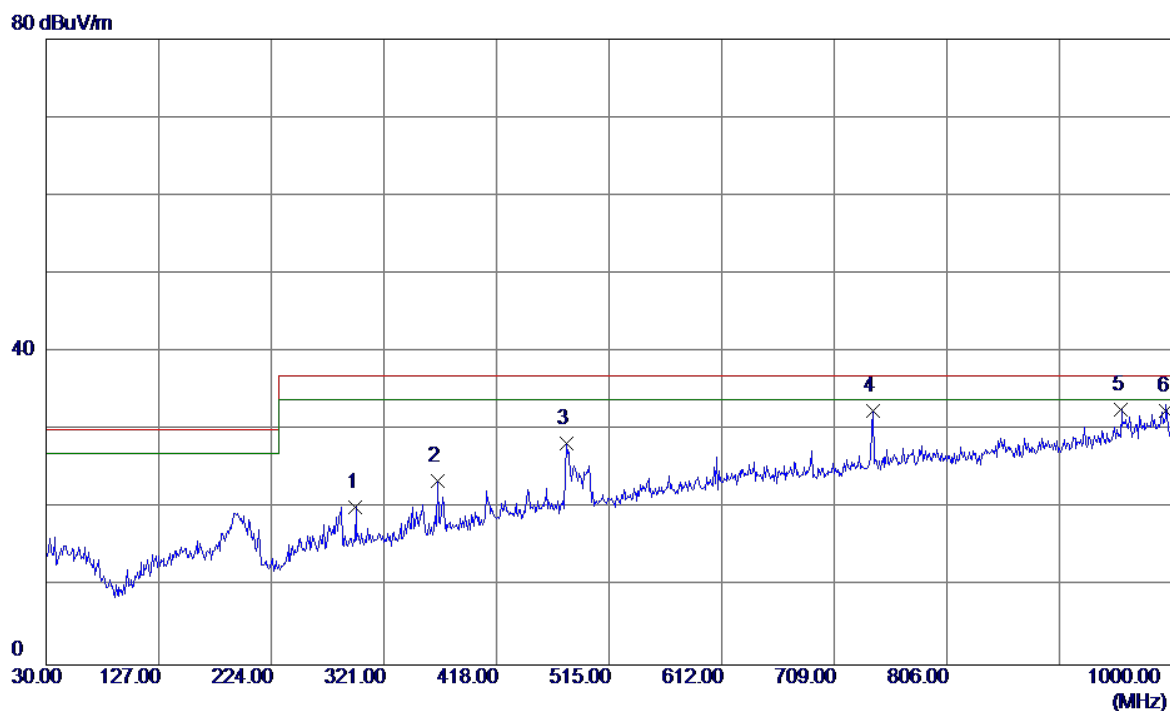

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	296.7500	33.93	-13.73	20.20	37.00	-16.80	QP
2	367.5600	35.50	-11.92	23.58	37.00	-13.42	QP
3	478.1400	37.29	-9.00	28.29	37.00	-8.71	QP
4	741.9800	36.25	-3.73	32.52	37.00	-4.48	QP
5 *	956.3500	32.95	-0.33	32.62	37.00	-4.38	QP
6	995.1500	32.50	-0.06	32.44	37.00	-4.56	QP




EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.5m		
Test Engineer	Lucky Mao		

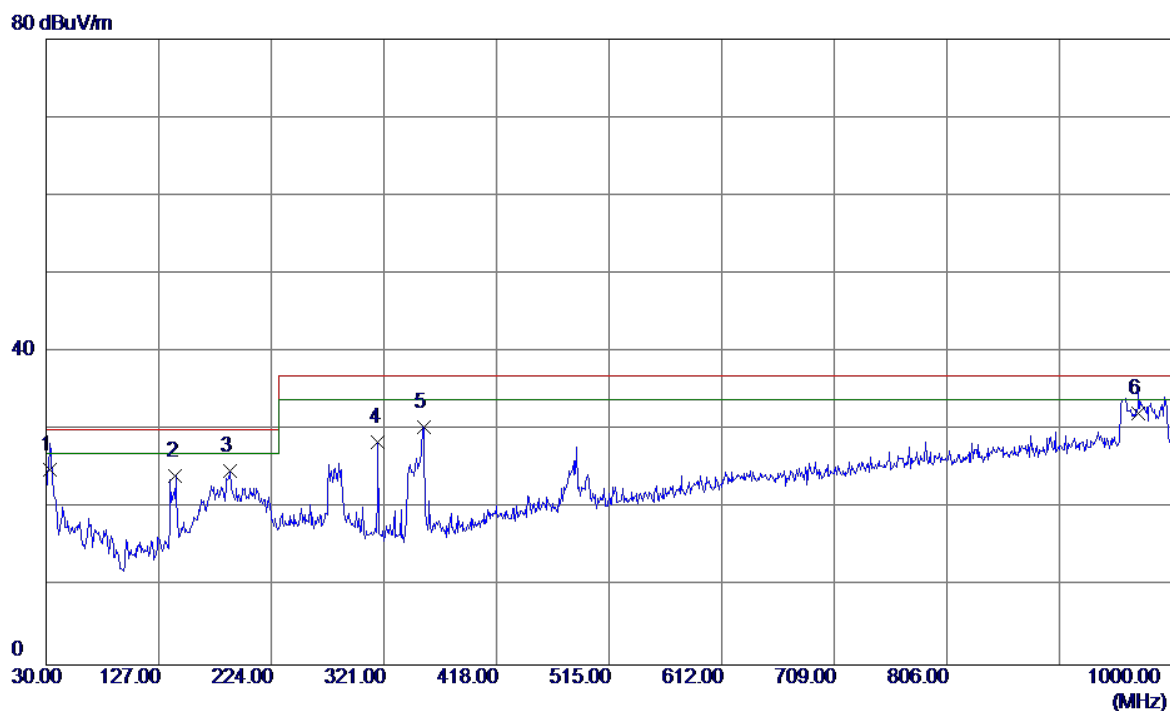


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	33.3950	43.00	-18.04	24.96	30.00	-5.04	QP
2	141.5500	40.05	-15.90	24.15	30.00	-5.85	QP
3	188.5950	42.41	-17.56	24.85	30.00	-5.15	QP
4	316.1500	42.16	-13.64	28.52	37.00	-8.48	QP
5	355.4350	43.16	-12.75	30.41	37.00	-6.59	QP
6 *	970.9000	33.20	-1.11	32.09	37.00	-4.91	QP

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.5m		
Test Engineer	Lucky Mao		

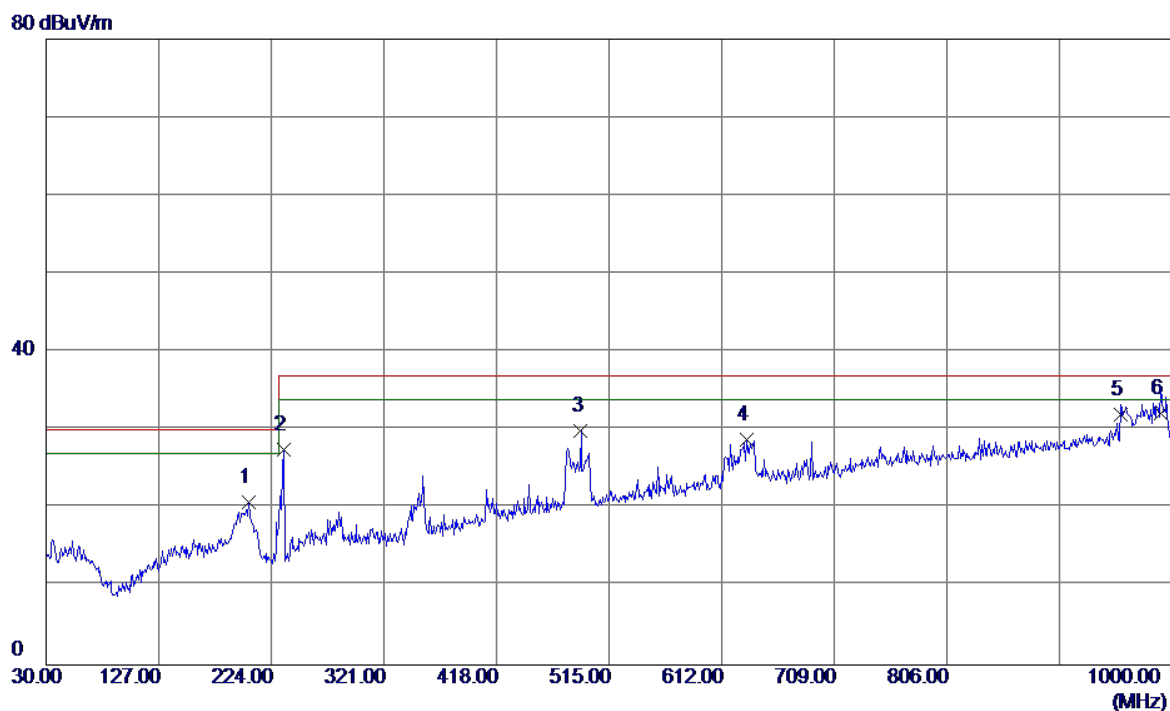


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	204.6000	38.68	-17.90	20.78	30.00	-9.22	QP
2	234.6700	44.25	-16.80	27.45	37.00	-9.55	QP
3	490.7500	38.81	-8.82	29.99	37.00	-7.01	QP
4	633.3400	34.73	-5.90	28.83	37.00	-8.17	QP
5	955.3800	32.30	-0.34	31.96	37.00	-5.04	QP
6 *	990.3000	32.30	-0.09	32.21	37.00	-4.79	QP

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	HDMI 1080P		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

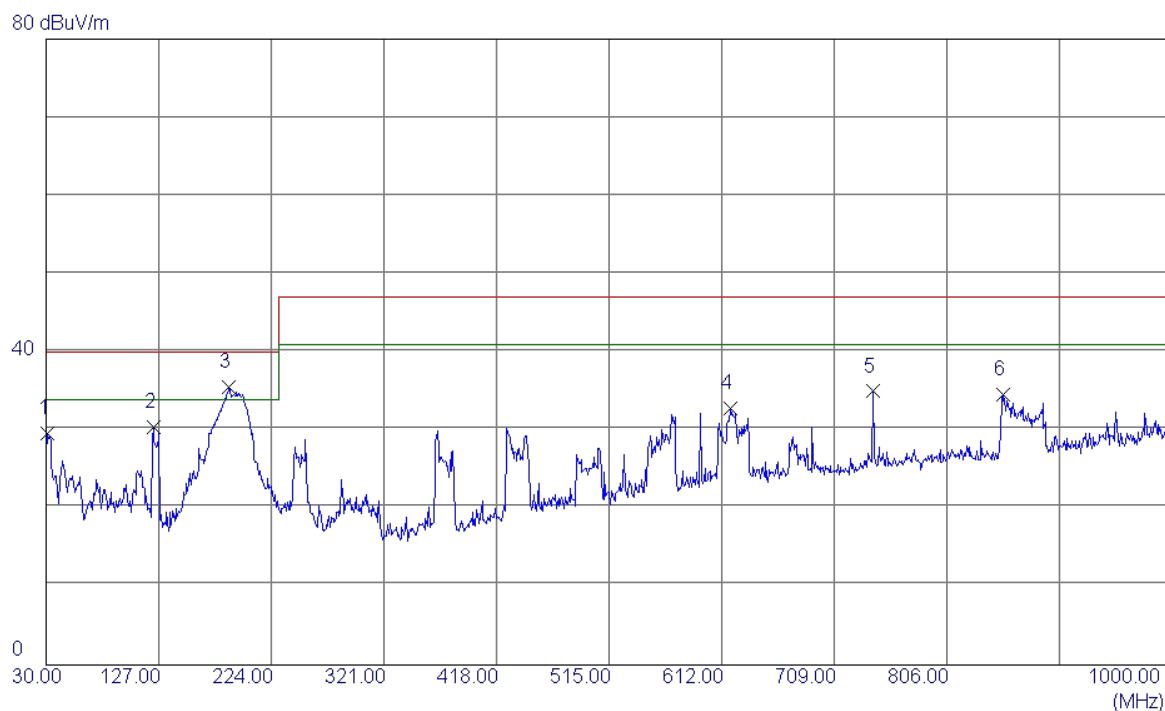


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.9700	47.74	-18.16	29.58	40.00	-10.42	QP
2	122.6350	48.10	-17.65	30.45	40.00	-9.55	QP
3 *	187.6250	52.99	-17.46	35.53	40.00	-4.47	QP
4	619.7600	39.05	-6.31	32.74	47.00	-14.26	QP
5	742.4650	39.31	-4.35	34.96	47.00	-12.04	QP
6	854.5000	37.53	-2.92	34.61	47.00	-12.39	QP

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	HDMI 1080P		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

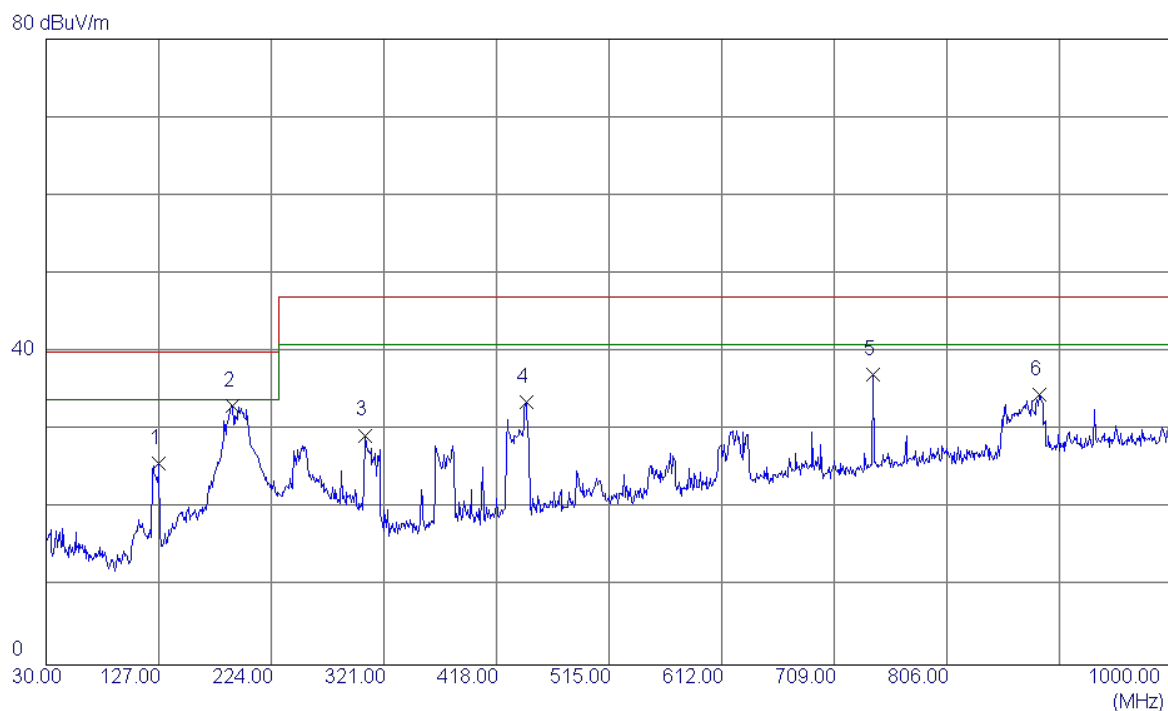


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	127.0000	43.05	-17.23	25.82	40.00	-14.18	QP
2 *	190.0500	50.77	-17.70	33.07	40.00	-6.93	QP
3	304.5100	43.26	-13.90	29.36	47.00	-17.64	QP
4	443.7050	43.52	-9.90	33.62	47.00	-13.38	QP
5	742.4650	41.41	-4.35	37.06	47.00	-9.94	QP
6	886.0250	36.92	-2.39	34.53	47.00	-12.47	QP

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 110V/50Hz	Polarization	Vertical
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

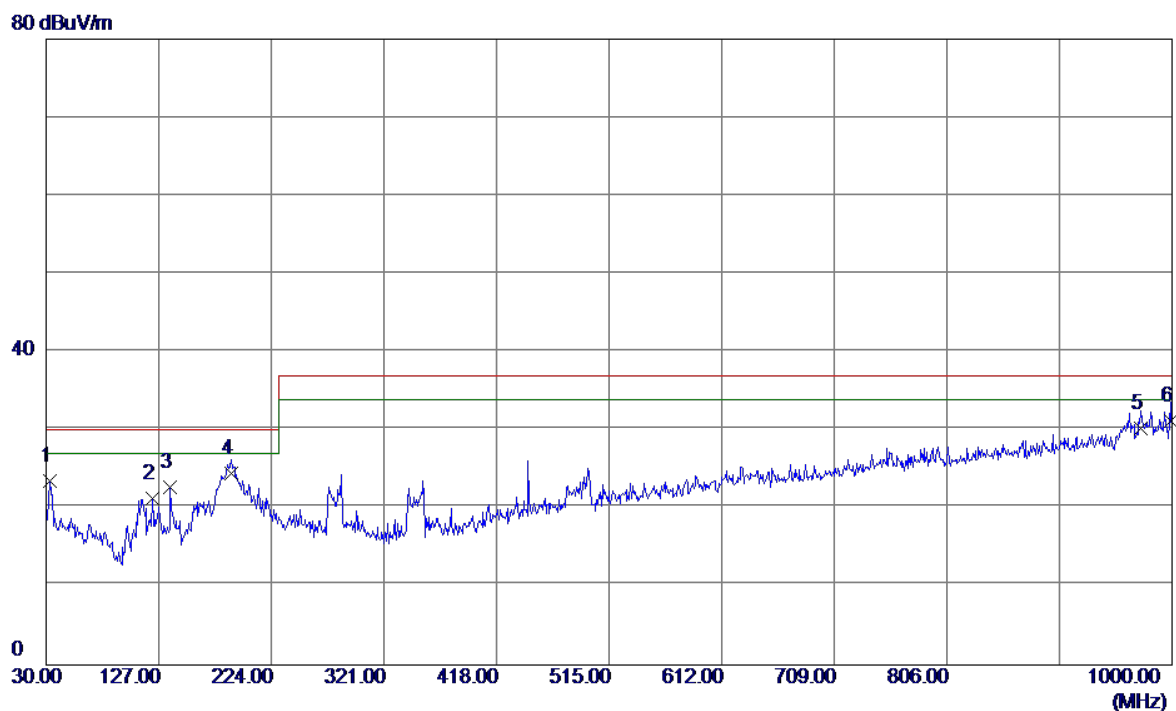

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	33.3950	41.62	-18.04	23.58	30.00	-6.42	QP
2	121.6650	39.06	-17.74	21.32	30.00	-8.68	QP
3	136.7000	39.08	-16.30	22.78	30.00	-7.22	QP
4 *	189.5650	42.21	-17.66	24.55	30.00	-5.45	QP
5	973.3250	31.26	-1.09	30.17	37.00	-6.83	QP
6	999.0300	32.11	-0.85	31.26	37.00	-5.74	QP

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 110V/50Hz	Polarization	Horizontal
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

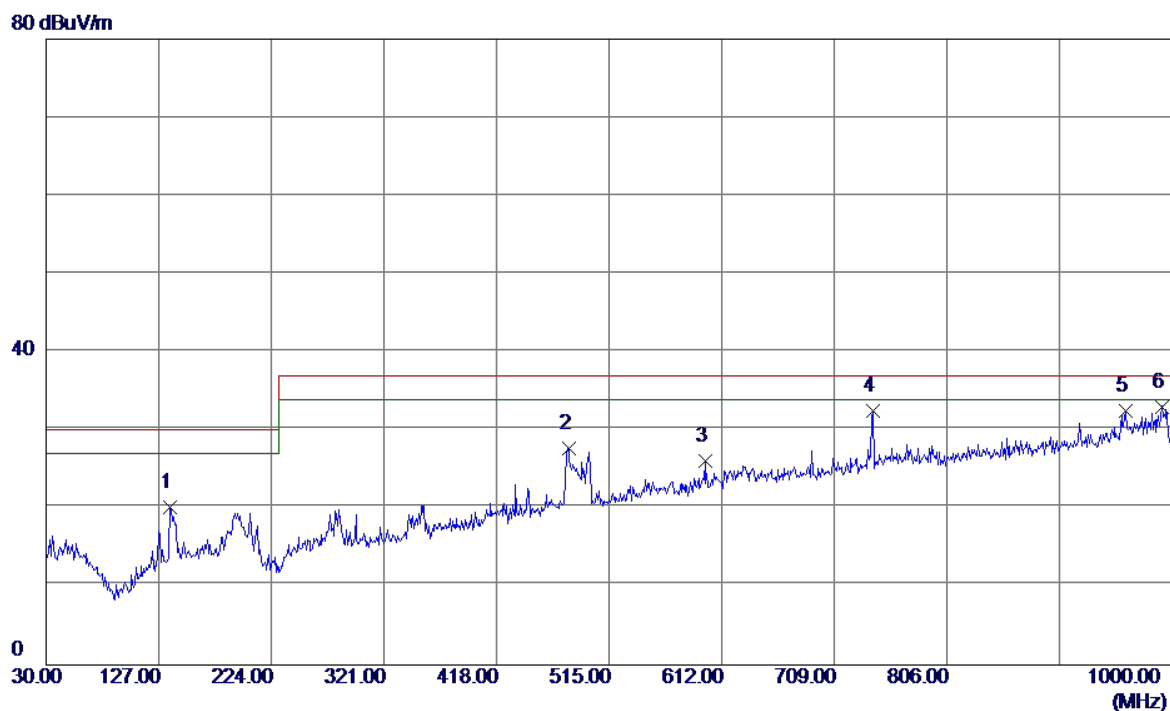


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	136.7000	36.24	-16.02	20.22	30.00	-9.78	QP
2	480.0800	36.67	-8.97	27.70	37.00	-9.30	QP
3	597.4500	32.58	-6.48	26.10	37.00	-10.90	QP
4	741.9800	36.21	-3.73	32.48	37.00	-4.52	QP
5	960.2300	32.85	-0.31	32.54	37.00	-4.46	QP
6 *	991.2700	33.05	-0.08	32.97	37.00	-4.03	QP

#### 4.1.9 TEST RESULTS (ABOVE 1 GHZ)


EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	D-SUB 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

100 dBuV/m

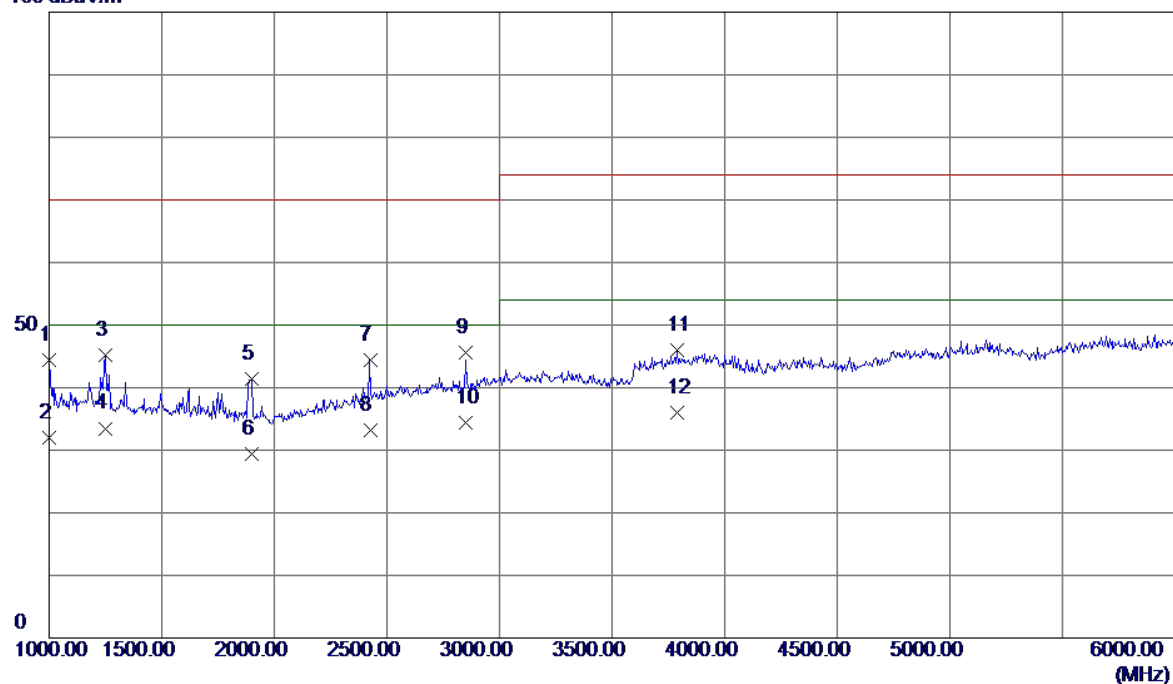

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1000.0000	47.55	-3.24	44.31	70.00	-25.69	Peak
2	1000.0000	35.26	-3.24	32.02	50.00	-17.98	AVG
3	1250.0000	48.28	-3.00	45.28	70.00	-24.72	Peak
4	1250.0000	36.50	-3.00	33.50	50.00	-16.50	AVG
5	1900.0000	45.20	-3.80	41.40	70.00	-28.60	Peak
6	1900.0000	33.25	-3.80	29.45	50.00	-20.55	AVG
7	2425.0000	45.43	-1.06	44.37	70.00	-25.63	Peak
8	2425.0000	34.25	-1.06	33.19	50.00	-16.81	AVG
9	2850.0000	44.32	1.22	45.54	70.00	-24.46	Peak
10 *	2850.0000	33.26	1.22	34.48	50.00	-15.52	AVG
11	3790.0000	42.62	3.41	46.03	74.00	-27.97	Peak
12	3790.0000	32.60	3.41	36.01	54.00	-17.99	AVG


EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	D-SUB 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

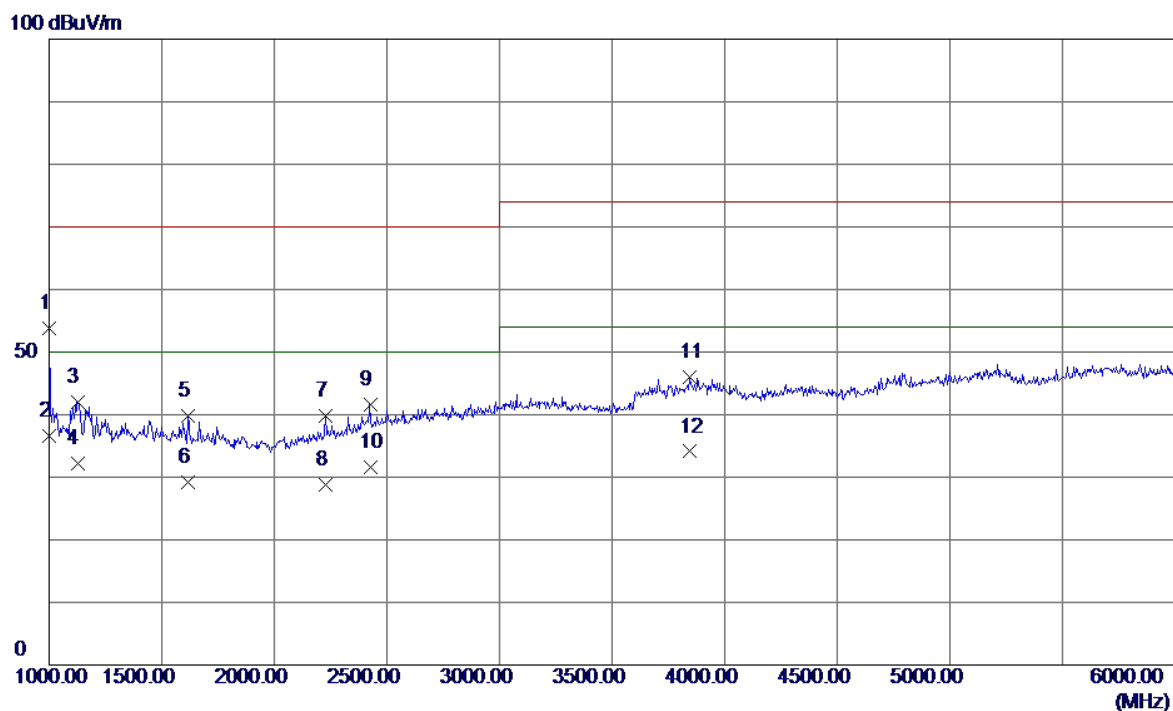

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1000.0000	57.08	-3.24	53.84	70.00	-16.16	Peak
2 *	1000.0000	39.90	-3.24	36.66	50.00	-13.34	AVG
3	1125.0000	45.20	-3.12	42.08	70.00	-27.92	Peak
4	1125.0000	35.26	-3.12	32.14	50.00	-17.86	AVG
5	1615.0000	42.84	-3.06	39.78	70.00	-30.22	Peak
6	1615.0000	32.26	-3.06	29.20	50.00	-20.80	AVG
7	2230.0000	42.19	-2.44	39.75	70.00	-30.25	Peak
8	2230.0000	31.26	-2.44	28.82	50.00	-21.18	AVG
9	2425.0000	42.67	-1.06	41.61	70.00	-28.39	Peak
10	2425.0000	32.61	-1.06	31.55	50.00	-18.45	AVG
11	3845.0000	42.37	3.60	45.97	74.00	-28.03	Peak
12	3845.0000	30.50	3.60	34.10	54.00	-19.90	AVG




EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

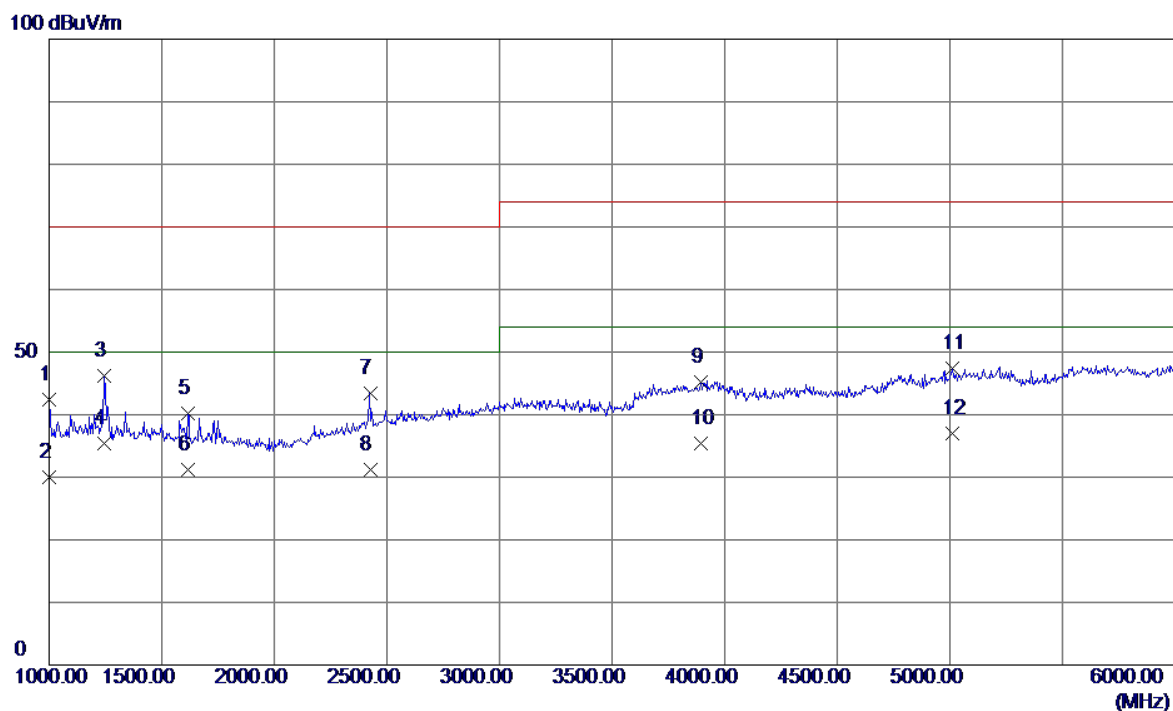


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1000.0000	45.62	-3.24	42.38	70.00	-27.62	Peak
2	1000.0000	33.26	-3.24	30.02	50.00	-19.98	AVG
3	1245.0000	49.18	-3.00	46.18	70.00	-23.82	Peak
4 *	1245.0000	38.49	-3.00	35.49	50.00	-14.51	AVG
5	1615.0000	43.24	-3.06	40.18	70.00	-29.82	Peak
6	1615.0000	34.26	-3.06	31.20	50.00	-18.80	AVG
7	2425.0000	44.42	-1.06	43.36	70.00	-26.64	Peak
8	2425.0000	32.25	-1.06	31.19	50.00	-18.81	AVG
9	3895.0000	41.35	3.77	45.12	74.00	-28.88	Peak
10	3895.0000	31.61	3.77	35.38	54.00	-18.62	AVG
11	5010.0000	40.95	6.42	47.37	74.00	-26.63	Peak
12	5010.0000	30.50	6.42	36.92	54.00	-17.08	AVG

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

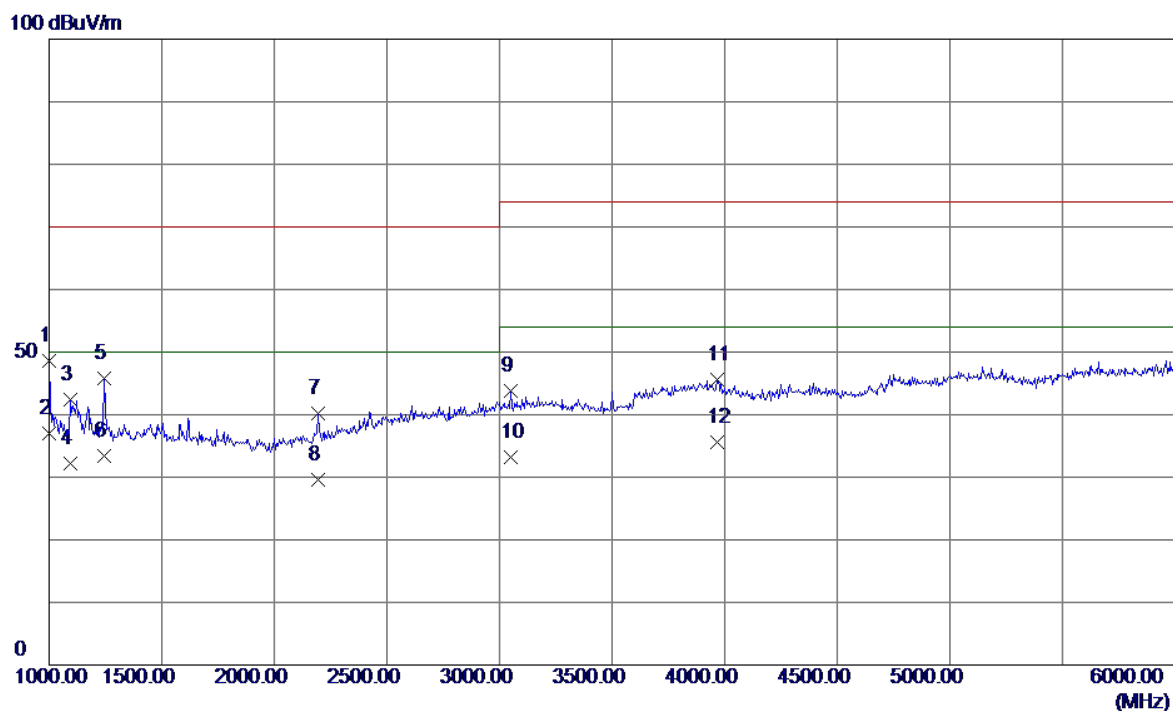


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1000.0000	51.76	-3.24	48.52	70.00	-21.48	Peak
2 *	1000.0000	40.26	-3.24	37.02	50.00	-12.98	AVG
3	1095.0000	45.59	-3.15	42.44	70.00	-27.56	Peak
4	1095.0000	35.26	-3.15	32.11	50.00	-17.89	AVG
5	1245.0000	48.73	-3.00	45.73	70.00	-24.27	Peak
6	1245.0000	36.49	-3.00	33.49	50.00	-16.51	AVG
7	2195.0000	42.84	-2.69	40.15	70.00	-29.85	Peak
8	2195.0000	32.26	-2.69	29.57	50.00	-20.43	AVG
9	3050.0000	41.79	2.02	43.81	74.00	-30.19	Peak
10	3050.0000	31.25	2.02	33.27	54.00	-20.73	AVG
11	3965.0000	41.65	4.00	45.65	74.00	-28.35	Peak
12	3965.0000	31.62	4.00	35.62	54.00	-18.38	AVG

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.5m		
Test Engineer	Lucky Mao		

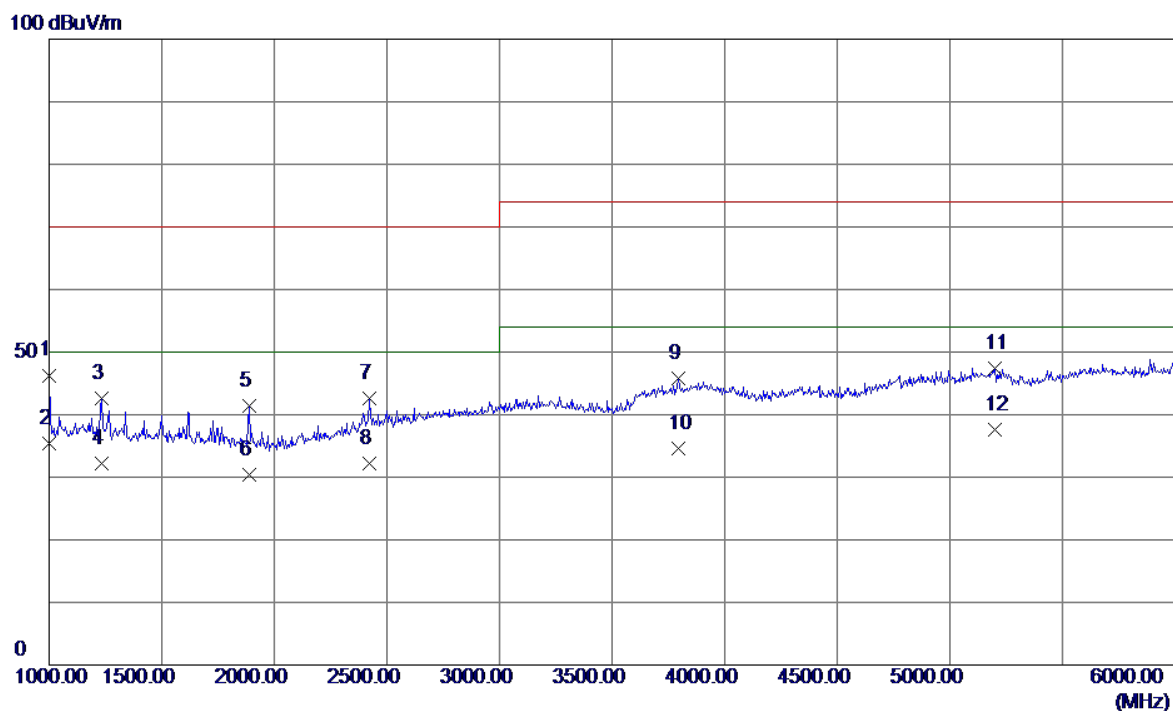


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1000.0000	49.54	-3.24	46.30	70.00	-23.70	Peak
2 *	1000.0000	38.55	-3.24	35.31	50.00	-14.69	AVG
3	1235.0000	45.64	-3.01	42.63	70.00	-27.37	Peak
4	1235.0000	35.25	-3.01	32.24	50.00	-17.76	AVG
5	1890.0000	45.08	-3.77	41.31	70.00	-28.69	Peak
6	1890.0000	34.25	-3.77	30.48	50.00	-19.52	AVG
7	2420.0000	43.70	-1.10	42.60	70.00	-27.40	Peak
8	2420.0000	33.25	-1.10	32.15	50.00	-17.85	AVG
9	3795.0000	42.46	3.43	45.89	74.00	-28.11	Peak
10	3795.0000	31.26	3.43	34.69	54.00	-19.31	AVG
11	5200.0000	40.41	7.07	47.48	74.00	-26.52	Peak
12	5200.0000	30.50	7.07	37.57	54.00	-16.43	AVG

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.5m		
Test Engineer	Lucky Mao		

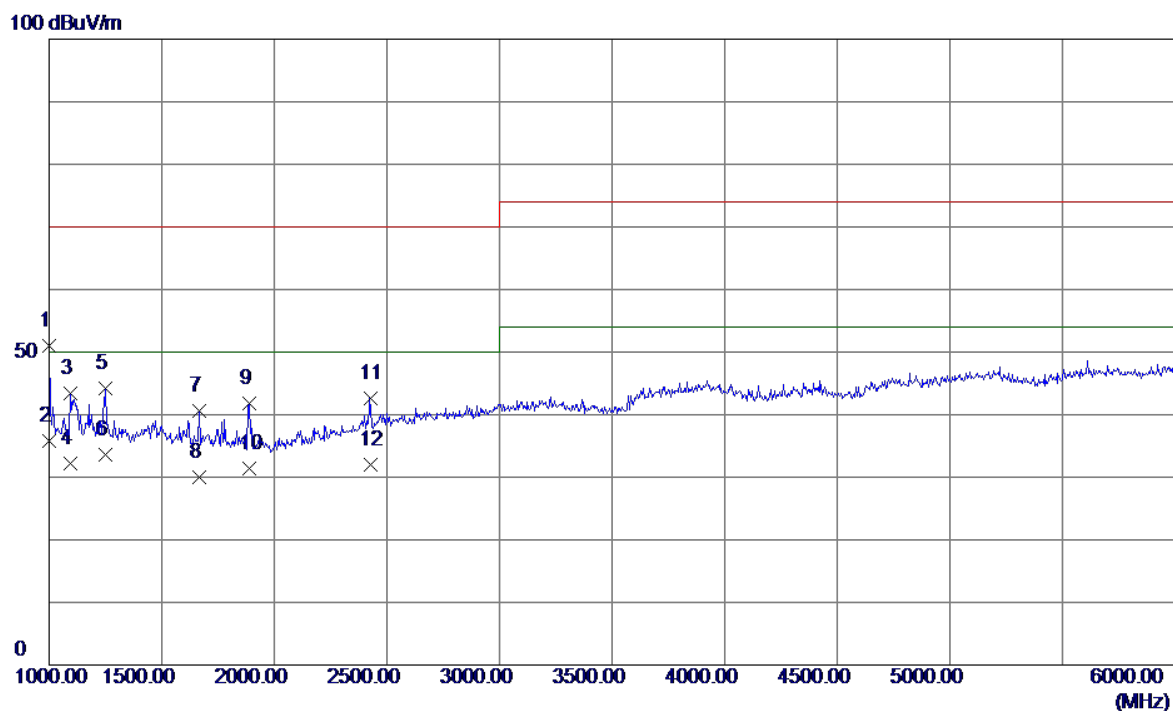


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1000.0000	54.26	-3.24	51.02	70.00	-18.98	Peak
2 *	1000.0000	39.02	-3.24	35.78	50.00	-14.22	AVG
3	1095.0000	46.49	-3.15	43.34	70.00	-26.66	Peak
4	1095.0000	35.26	-3.15	32.11	50.00	-17.89	AVG
5	1250.0000	47.22	-3.00	44.22	70.00	-25.78	Peak
6	1250.0000	36.52	-3.00	33.52	50.00	-16.48	AVG
7	1665.0000	43.73	-3.19	40.54	70.00	-29.46	Peak
8	1665.0000	33.26	-3.19	30.07	50.00	-19.93	AVG
9	1890.0000	45.53	-3.77	41.76	70.00	-28.24	Peak
10	1890.0000	35.25	-3.77	31.48	50.00	-18.52	AVG
11	2425.0000	43.72	-1.06	42.66	70.00	-27.34	Peak
12	2425.0000	33.09	-1.06	32.03	50.00	-17.97	AVG

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	HDMI 1080P		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

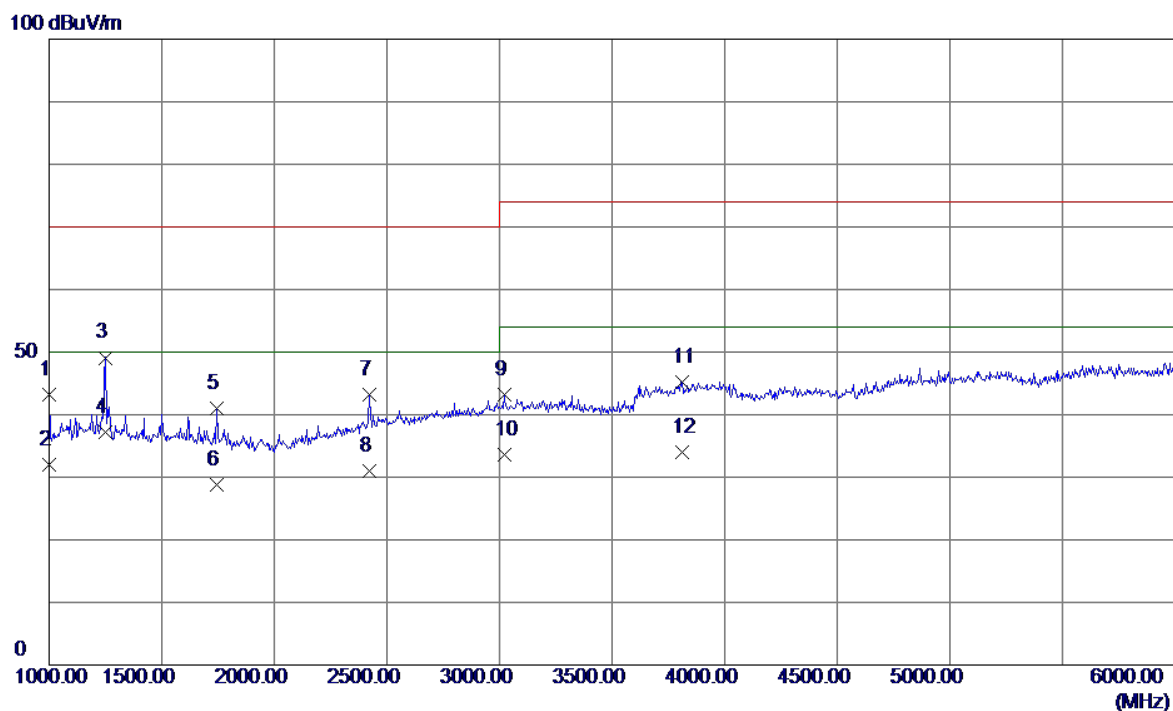


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1000.0000	46.41	-3.24	43.17	70.00	-26.83	Peak
2	1000.0000	35.26	-3.24	32.02	50.00	-17.98	AVG
3	1250.0000	52.10	-3.00	49.10	70.00	-20.90	Peak
4 *	1250.0000	40.26	-3.00	37.26	50.00	-12.74	AVG
5	1745.0000	44.44	-3.40	41.04	70.00	-28.96	Peak
6	1745.0000	32.26	-3.40	28.86	50.00	-21.14	AVG
7	2420.0000	44.26	-1.10	43.16	70.00	-26.84	Peak
8	2420.0000	32.14	-1.10	31.04	50.00	-18.96	AVG
9	3020.0000	41.29	1.99	43.28	74.00	-30.72	Peak
10	3020.0000	31.62	1.99	33.61	54.00	-20.39	AVG
11	3810.0000	41.78	3.48	45.26	74.00	-28.74	Peak
12	3810.0000	30.45	3.48	33.93	54.00	-20.07	AVG

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	HDMI 1080P		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

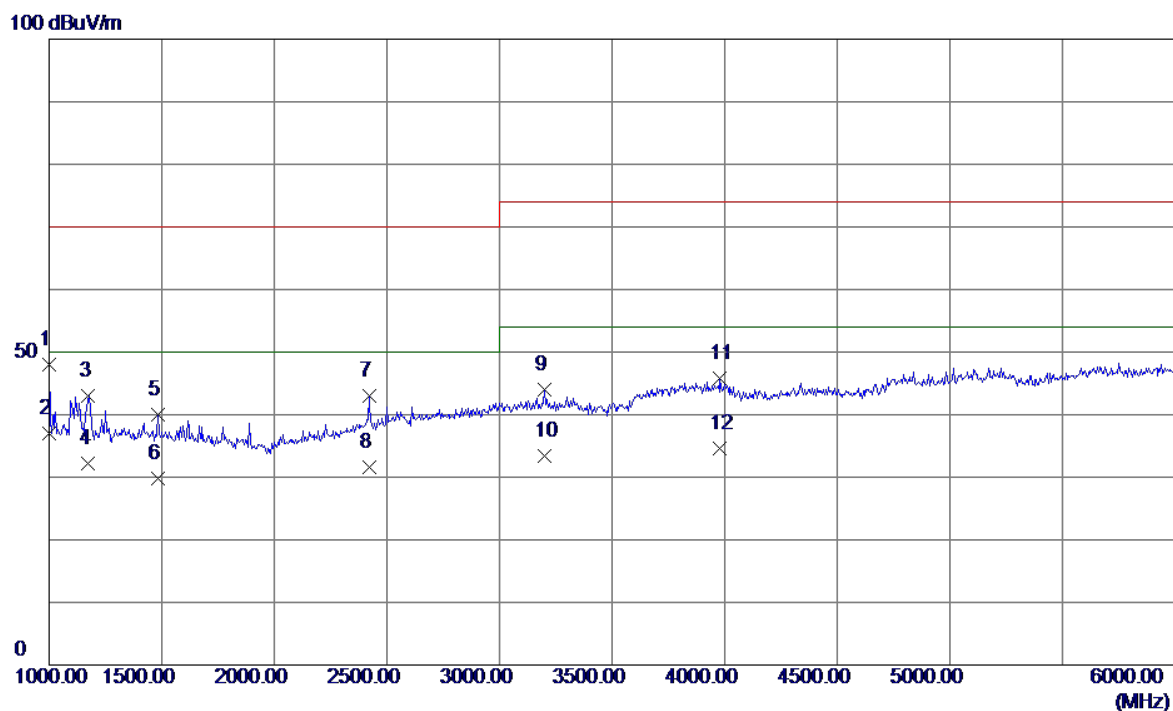


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1000.0000	51.19	-3.24	47.95	70.00	-22.05	Peak
2 *	1000.0000	40.26	-3.24	37.02	50.00	-12.98	AVG
3	1175.0000	46.05	-3.07	42.98	70.00	-27.02	Peak
4	1175.0000	35.26	-3.07	32.19	50.00	-17.81	AVG
5	1485.0000	42.77	-2.77	40.00	70.00	-30.00	Peak
6	1485.0000	32.61	-2.77	29.84	50.00	-20.16	AVG
7	2420.0000	44.08	-1.10	42.98	70.00	-27.02	Peak
8	2420.0000	32.61	-1.10	31.51	50.00	-18.49	AVG
9	3200.0000	41.76	2.16	43.92	74.00	-30.08	Peak
10	3200.0000	31.25	2.16	33.41	54.00	-20.59	AVG
11	3980.0000	41.72	4.05	45.77	74.00	-28.23	Peak
12	3980.0000	30.51	4.05	34.56	54.00	-19.44	AVG

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 110V/50Hz	Polarization	Vertical
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

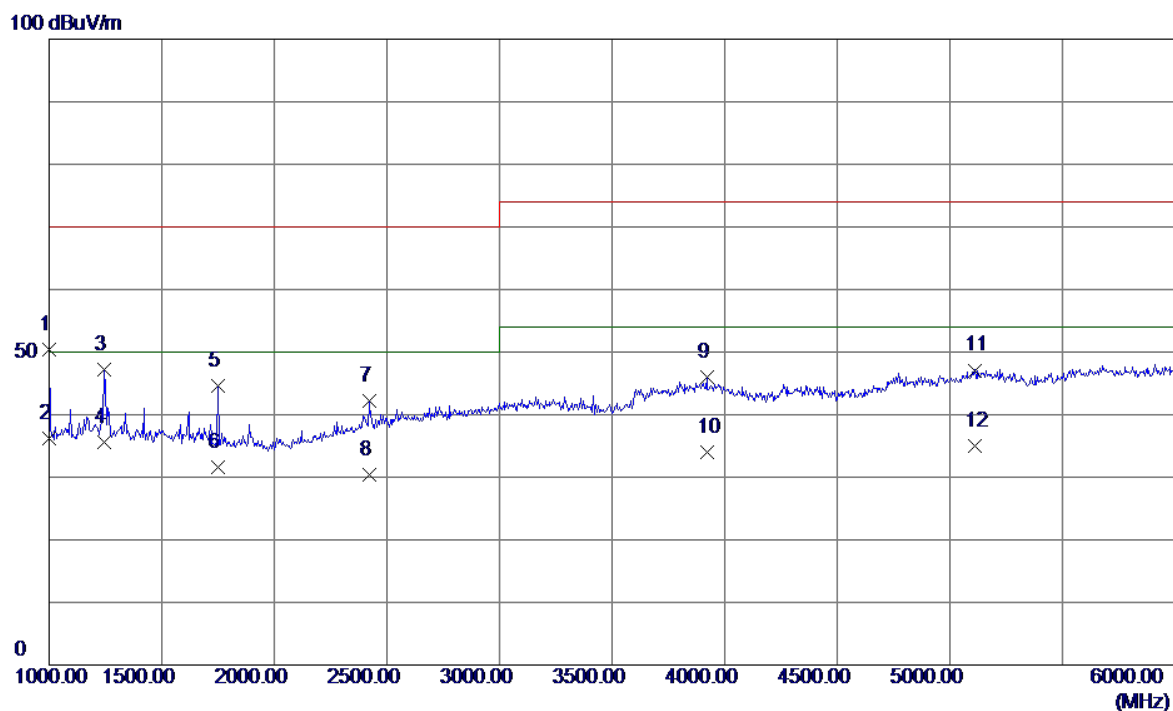

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1000.0000	53.60	-3.24	50.36	70.00	-19.64	Peak
2 *	1000.0000	39.50	-3.24	36.26	50.00	-13.74	AVG
3	1245.0000	50.25	-3.00	47.25	70.00	-22.75	Peak
4	1245.0000	38.53	-3.00	35.53	50.00	-14.47	AVG
5	1750.0000	47.94	-3.41	44.53	70.00	-25.47	Peak
6	1750.0000	35.06	-3.41	31.65	50.00	-18.35	AVG
7	2420.0000	43.36	-1.10	42.26	70.00	-27.74	Peak
8	2420.0000	31.51	-1.10	30.41	50.00	-19.59	AVG
9	3920.0000	42.11	3.85	45.96	74.00	-28.04	Peak
10	3920.0000	30.14	3.85	33.99	54.00	-20.01	AVG
11	5110.0000	40.33	6.77	47.10	74.00	-26.90	Peak
12	5110.0000	28.30	6.77	35.07	54.00	-18.93	AVG

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 110V/50Hz	Polarization	Horizontal
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

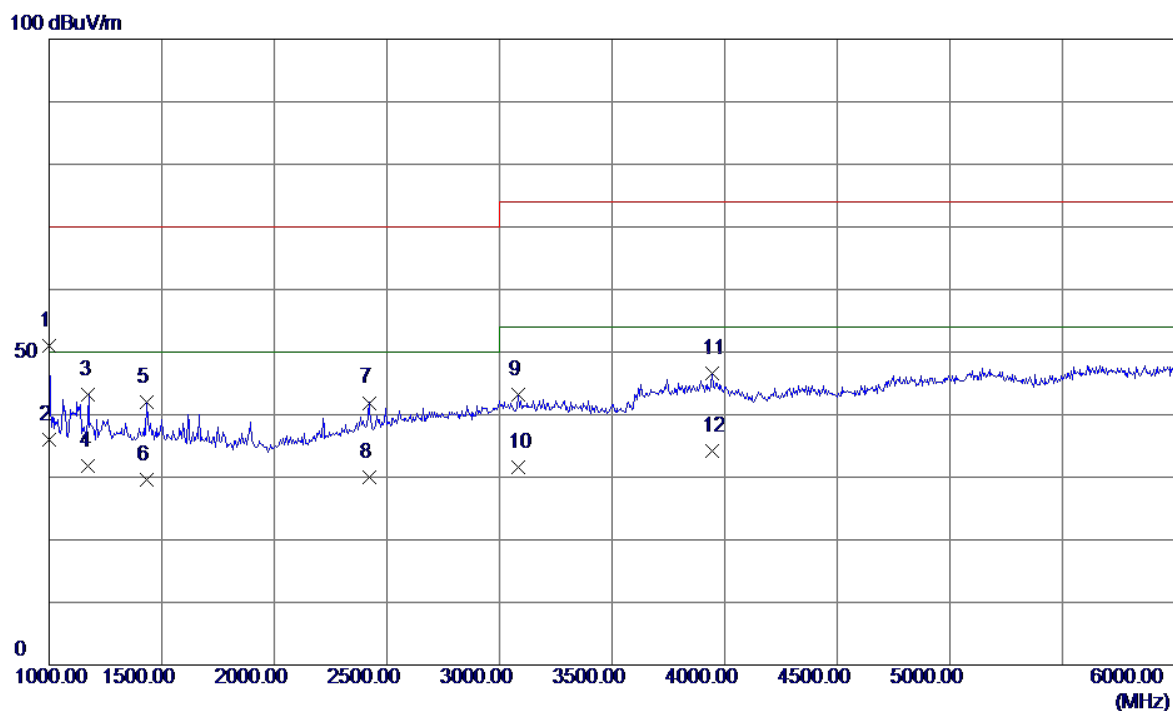

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1000.0000	54.22	-3.24	50.98	70.00	-19.02	Peak
2 *	1000.0000	39.30	-3.24	36.06	50.00	-13.94	AVG
3	1175.0000	46.22	-3.07	43.15	70.00	-26.85	Peak
4	1175.0000	34.84	-3.07	31.77	50.00	-18.23	AVG
5	1435.0000	44.82	-2.82	42.00	70.00	-28.00	Peak
6	1435.0000	32.41	-2.82	29.59	50.00	-20.41	AVG
7	2420.0000	43.00	-1.10	41.90	70.00	-28.10	Peak
8	2420.0000	31.05	-1.10	29.95	50.00	-20.05	AVG
9	3085.0000	41.24	2.05	43.29	74.00	-30.71	Peak
10	3085.0000	29.47	2.05	31.52	54.00	-22.48	AVG
11	3945.0000	42.64	3.93	46.57	74.00	-27.43	Peak
12	3945.0000	30.27	3.93	34.20	54.00	-19.80	AVG



## 4.2 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

### 4.2.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class A equipment

Table clause	Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class A Limits (dB(μV) )
A8.1	0.15 - 0.5	AMN	Quasi Peak / 9 kHz	79
	0.5 - 30			73
A8.2	0.15 - 0.5	AMN	Average / 9 kHz	66
	0.5 - 30			60

Requirements for conducted emissions from AC mains power ports of Class B equipment

Table clause	Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class B Limits (dB(μV) )
A9.1	0.15 - 0.5	AMN	Quasi Peak / 9 kHz	66-56
	0.5 - 5			56
	5 - 30			60
A9.2	0.15 - 0.5	AMN	Average / 9 kHz	56-46
	0.5 - 5			46
	5 - 30			50

#### NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

### 4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Artificial-Mains Network	SCHWARZBECK	NSLK 8127	8127685	Nov. 20, 2016
2	LISN	R&S	ENV216	100526	Mar. 27, 2017
3	Test Cable	N/A	RG400 12m	N/A	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESR3	101862	Nov. 20, 2016
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


#### 4.2.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

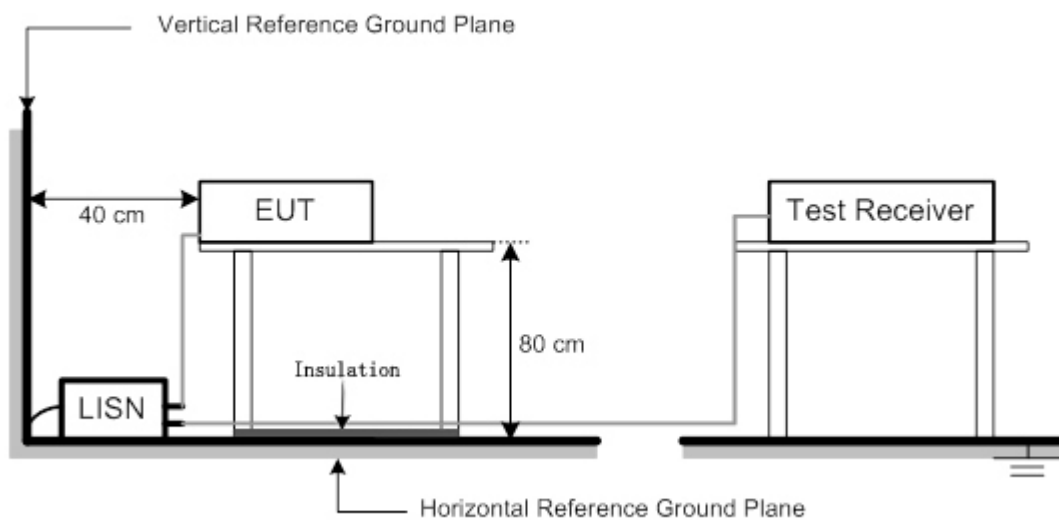


#### 4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **3.3** unless otherwise a special operating condition is specified in the follows during the testing.


#### 4.2.7 TEST RESULTS

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	D-SUB 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

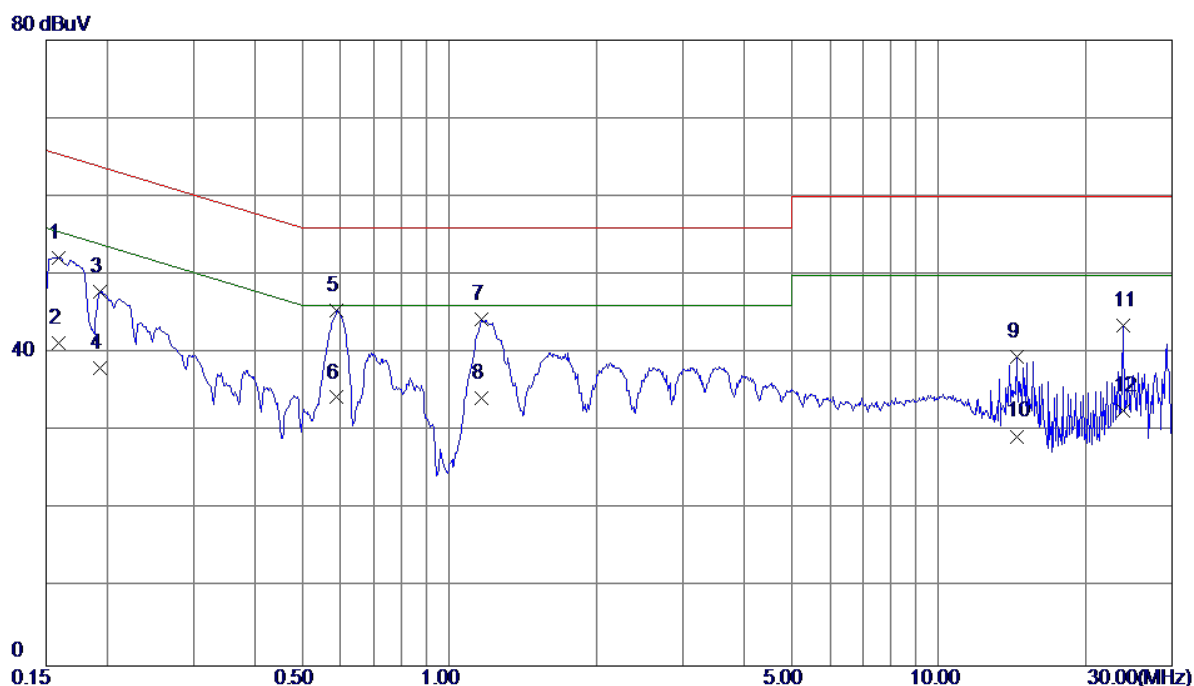


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1590	42.55	9.65	52.20	65.52	-13.32	QP
2	0.1590	31.60	9.65	41.25	55.52	-14.27	AVG
3	0.1928	38.24	9.67	47.91	63.92	-16.01	QP
4	0.1928	28.40	9.67	38.07	53.92	-15.85	AVG
5 *	0.5887	35.46	10.02	45.48	56.00	-10.52	QP
6	0.5887	24.30	10.02	34.32	46.00	-11.68	AVG
7	1.1670	34.18	10.21	44.39	56.00	-11.61	QP
8	1.1670	24.10	10.21	34.31	46.00	-11.69	AVG
9	14.4398	28.84	10.66	39.50	60.00	-20.50	QP
10	14.4398	18.70	10.66	29.36	50.00	-20.64	AVG
11	23.8875	32.84	10.75	43.59	60.00	-16.41	QP
12	23.8875	21.90	10.75	32.65	50.00	-17.35	AVG

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	D-SUB 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

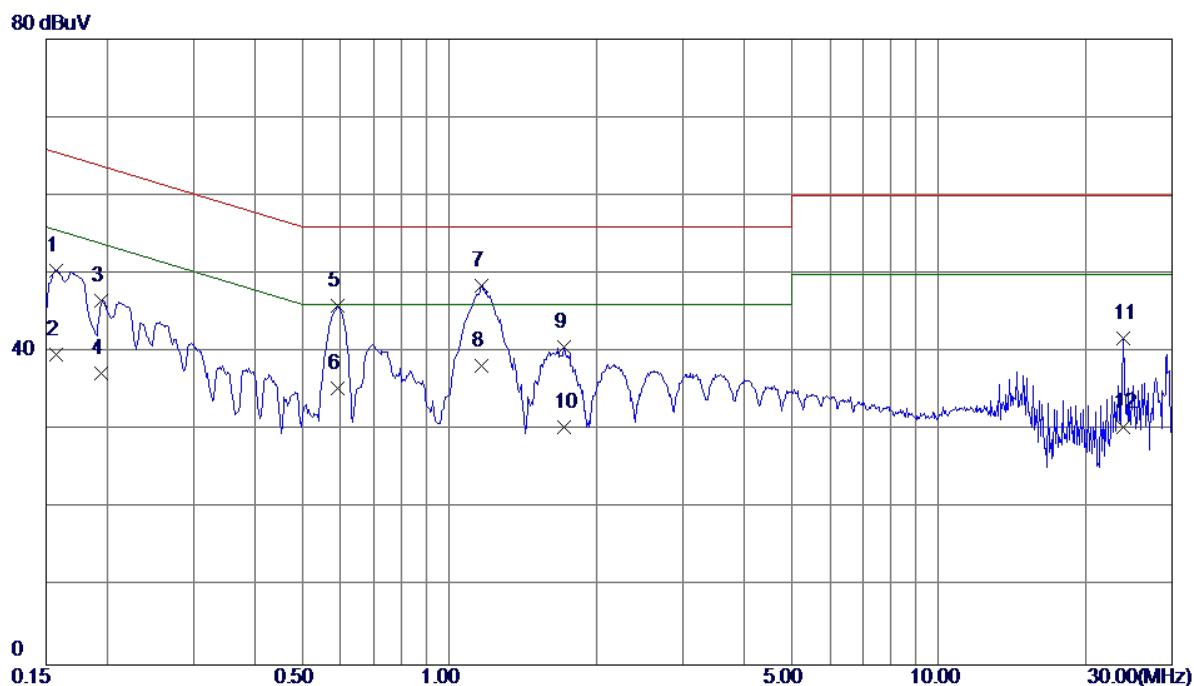


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1568	40.89	9.54	50.43	65.63	-15.20	QP
2	0.1568	30.20	9.54	39.74	55.63	-15.89	AVG
3	0.1949	36.98	9.65	46.63	63.83	-17.20	QP
4	0.1949	27.60	9.65	37.25	53.83	-16.58	AVG
5	0.5910	36.01	9.83	45.84	56.00	-10.16	QP
6	0.5910	25.50	9.83	35.33	46.00	-10.67	AVG
7 *	1.1625	38.54	9.93	48.47	56.00	-7.53	QP
8	1.1625	28.30	9.93	38.23	46.00	-7.77	AVG
9	1.7205	30.55	10.06	40.61	56.00	-15.39	QP
10	1.7205	20.40	10.06	30.46	46.00	-15.54	AVG
11	23.8898	30.98	10.75	41.73	60.00	-18.27	QP
12	23.8898	19.70	10.75	30.45	50.00	-19.55	AVG

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

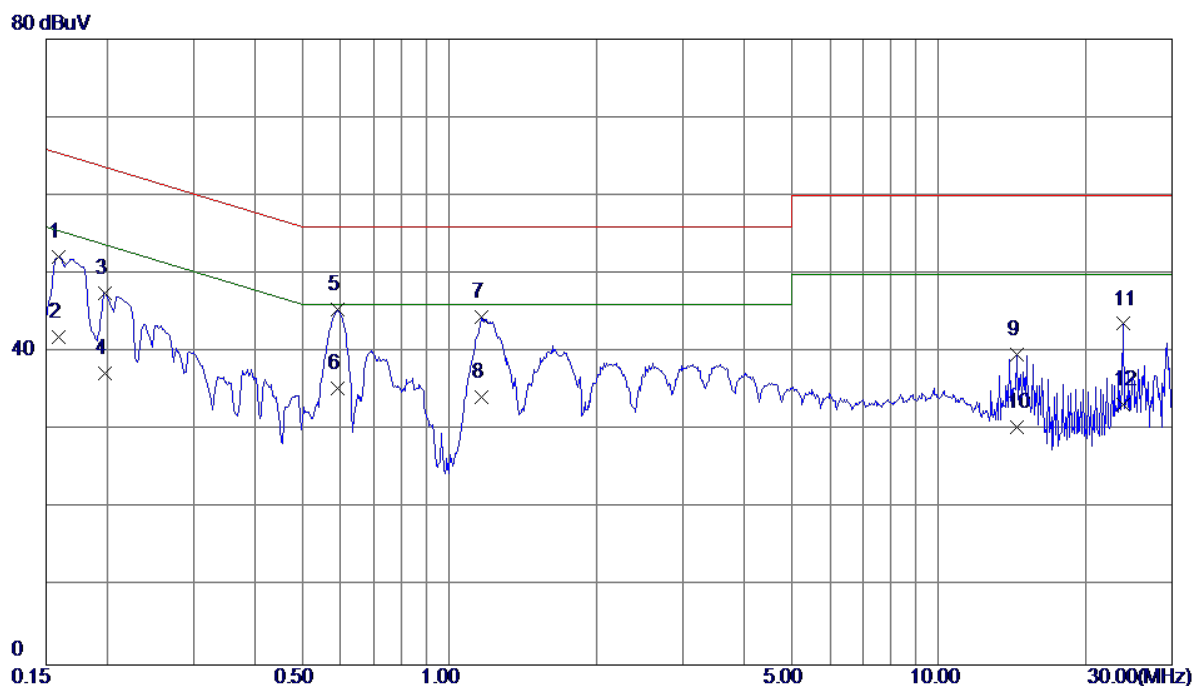


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1590	42.57	9.65	52.22	65.52	-13.30	QP
2	0.1590	32.20	9.65	41.85	55.52	-13.67	AVG
3	0.1973	37.91	9.67	47.58	63.72	-16.14	QP
4	0.1973	27.60	9.67	37.27	53.72	-16.45	AVG
5 *	0.5910	35.42	10.02	45.44	56.00	-10.56	QP
6	0.5910	25.30	10.02	35.32	46.00	-10.68	AVG
7	1.1647	34.20	10.21	44.41	56.00	-11.59	QP
8	1.1647	24.10	10.21	34.31	46.00	-11.69	AVG
9	14.4420	29.02	10.66	39.68	60.00	-20.32	QP
10	14.4420	19.80	10.66	30.46	50.00	-19.54	AVG
11	23.8875	32.85	10.75	43.60	60.00	-16.40	QP
12	23.8875	22.50	10.75	33.25	50.00	-16.75	AVG

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

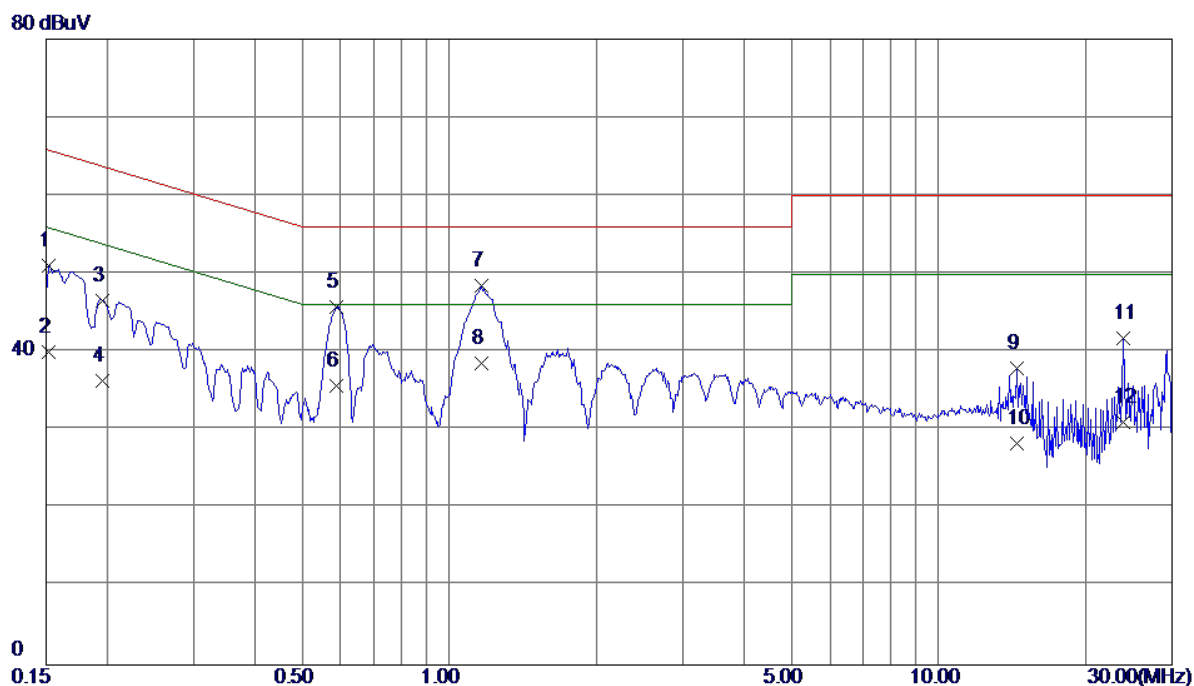


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1522	41.54	9.54	51.08	65.88	-14.80	QP
2	0.1522	30.50	9.54	40.04	55.88	-15.84	AVG
3	0.1955	36.94	9.65	46.59	63.80	-17.21	QP
4	0.1955	26.70	9.65	36.35	53.80	-17.45	AVG
5	0.5887	36.00	9.83	45.83	56.00	-10.17	QP
6	0.5887	25.80	9.83	35.63	46.00	-10.37	AVG
7 *	1.1625	38.60	9.93	48.53	56.00	-7.47	QP
8	1.1625	28.60	9.93	38.53	46.00	-7.47	AVG
9	14.4420	27.38	10.54	37.92	60.00	-22.08	QP
10	14.4420	17.81	10.54	28.35	50.00	-21.65	AVG
11	23.8898	30.99	10.75	41.74	60.00	-18.26	QP
12	23.8898	20.30	10.75	31.05	50.00	-18.95	AVG

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.5m		
Test Engineer	Lucky Mao		

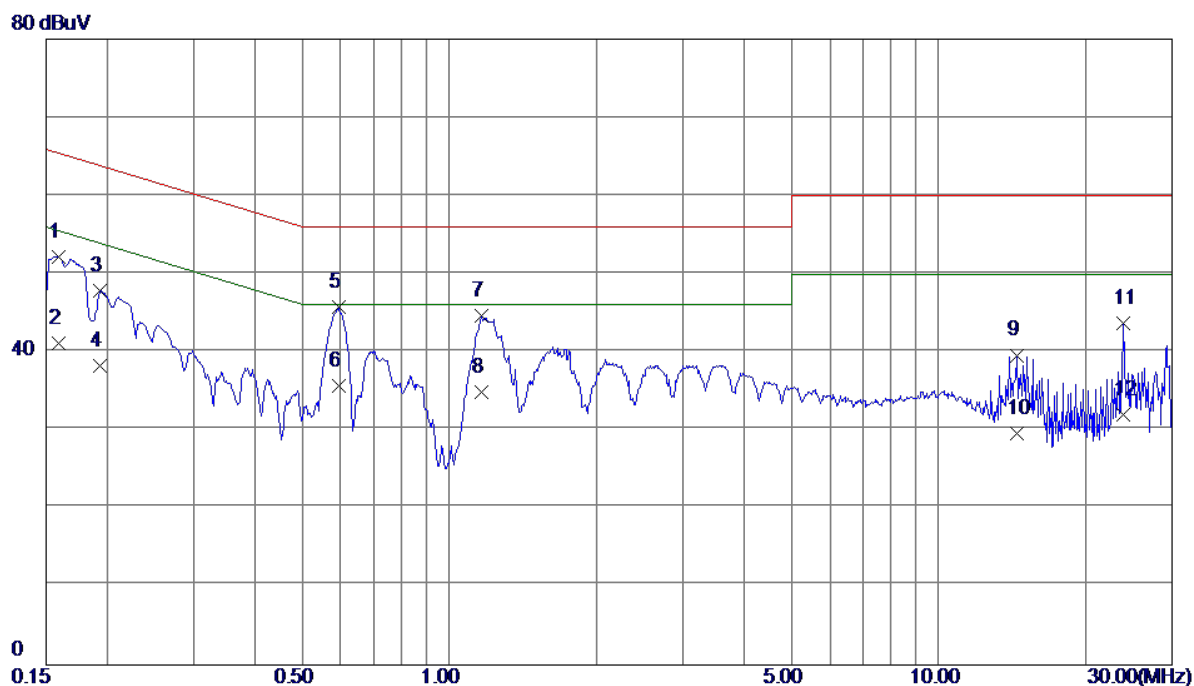

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1590	42.58	9.65	52.23	65.52	-13.29	QP
2	0.1590	31.50	9.65	41.15	55.52	-14.37	AVG
3	0.1928	38.14	9.67	47.81	63.92	-16.11	QP
4	0.1928	28.60	9.67	38.27	53.92	-15.65	AVG
5 *	0.5932	35.72	10.02	45.74	56.00	-10.26	QP
6	0.5932	25.60	10.02	35.62	46.00	-10.38	AVG
7	1.1647	34.38	10.21	44.59	56.00	-11.41	QP
8	1.1647	24.70	10.21	34.91	46.00	-11.09	AVG
9	14.4465	28.94	10.66	39.60	60.00	-20.40	QP
10	14.4465	18.90	10.66	29.56	50.00	-20.44	AVG
11	23.8898	32.95	10.75	43.70	60.00	-16.30	QP
12	23.8898	21.30	10.75	32.05	50.00	-17.95	AVG


EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.5m		
Test Engineer	Lucky Mao		

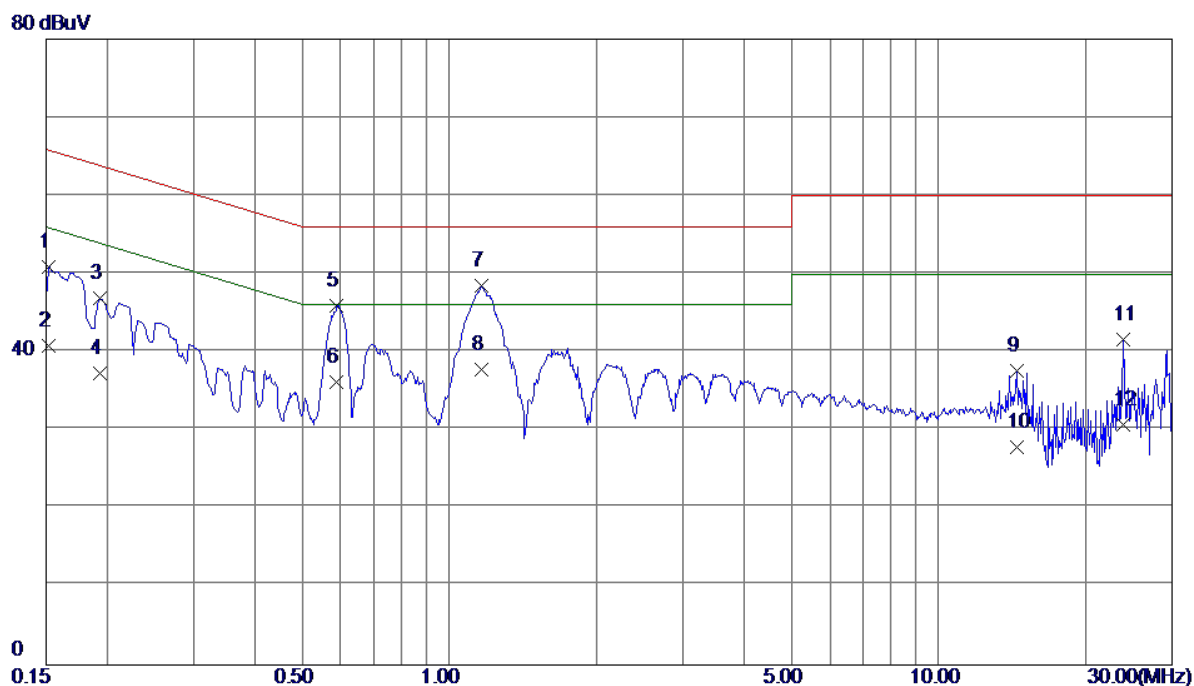

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1522	41.36	9.54	50.90	65.88	-14.98	QP
2	0.1522	31.20	9.54	40.74	55.88	-15.14	AVG
3	0.1928	37.21	9.64	46.85	63.92	-17.07	QP
4	0.1928	27.61	9.64	37.25	53.92	-16.67	AVG
5	0.5887	36.12	9.83	45.95	56.00	-10.05	QP
6	0.5887	26.30	9.83	36.13	46.00	-9.87	AVG
7 *	1.1647	38.53	9.93	48.46	56.00	-7.54	QP
8	1.1647	27.90	9.93	37.83	46.00	-8.17	AVG
9	14.4398	27.10	10.54	37.64	60.00	-22.36	QP
10	14.4398	17.31	10.54	27.85	50.00	-22.15	AVG
11	23.8898	30.84	10.75	41.59	60.00	-18.41	QP
12	23.8898	19.90	10.75	30.65	50.00	-19.35	AVG




EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	HDMI 1080P		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

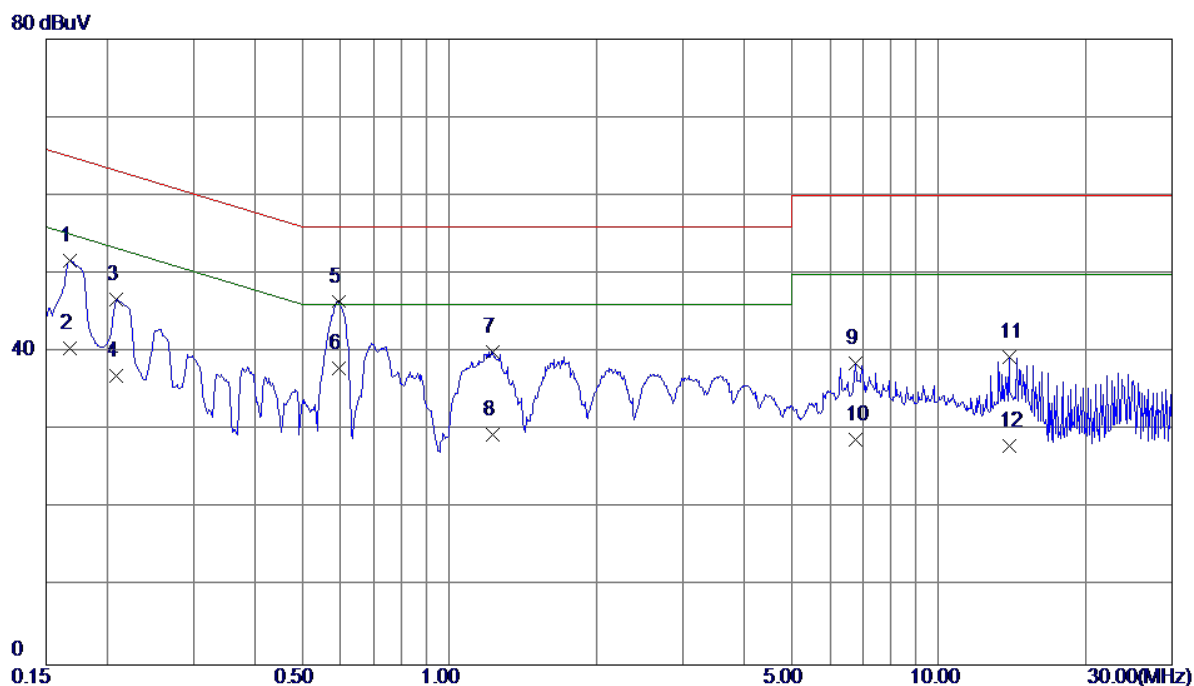


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1680	41.99	9.65	51.64	65.06	-13.42	QP
2	0.1680	30.90	9.65	40.55	55.06	-14.51	AVG
3	0.2085	37.05	9.69	46.74	63.26	-16.52	QP
4	0.2085	27.20	9.69	36.89	53.26	-16.37	AVG
5	0.5932	36.46	10.02	46.48	56.00	-9.52	QP
6 *	0.5932	27.90	10.02	37.92	46.00	-8.08	AVG
7	1.2278	29.83	10.22	40.05	56.00	-15.95	QP
8	1.2278	19.20	10.22	29.42	46.00	-16.58	AVG
9	6.7560	28.41	10.17	38.58	60.00	-21.42	QP
10	6.7560	18.60	10.17	28.77	50.00	-21.23	AVG
11	13.9740	28.76	10.63	39.39	60.00	-20.61	QP
12	13.9740	17.41	10.63	28.04	50.00	-21.96	AVG

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	HDMI 1080P		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

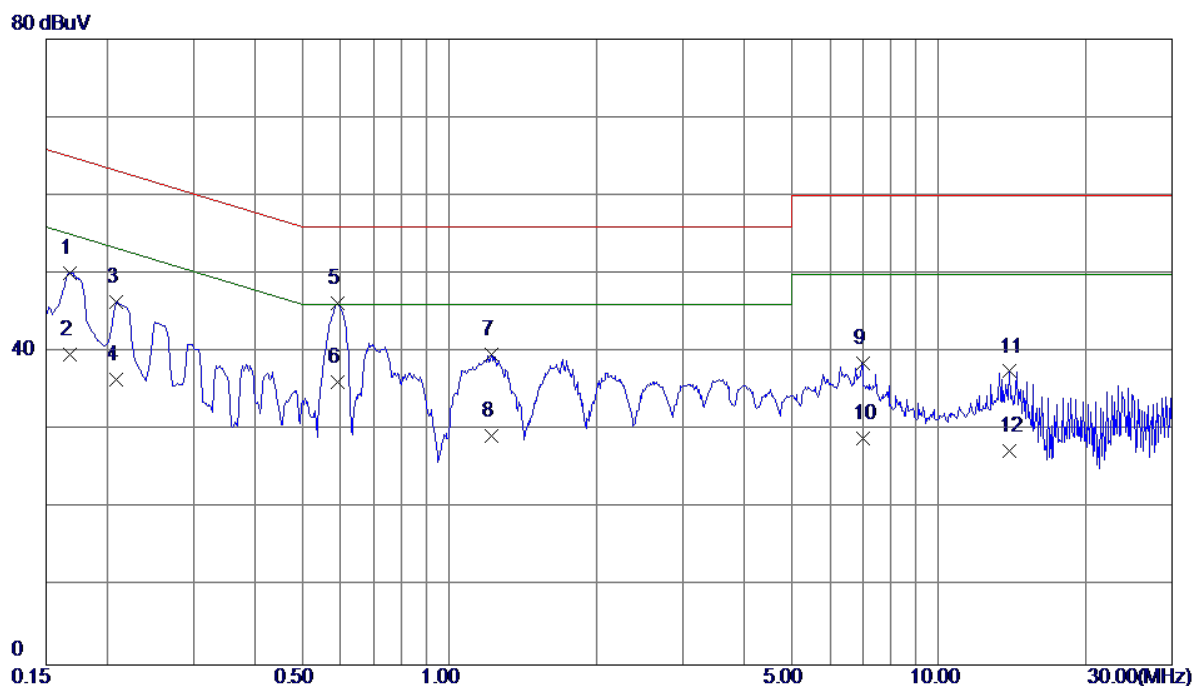


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1680	40.59	9.55	50.14	65.06	-14.92	QP
2	0.1680	30.10	9.55	39.65	55.06	-15.41	AVG
3	0.2085	36.76	9.67	46.43	63.26	-16.83	QP
4	0.2085	26.80	9.67	36.47	53.26	-16.79	AVG
5 *	0.5910	36.44	9.83	46.27	56.00	-9.73	QP
6	0.5910	26.40	9.83	36.23	46.00	-9.77	AVG
7	1.2210	29.78	9.94	39.72	56.00	-16.28	QP
8	1.2210	19.30	9.94	29.24	46.00	-16.76	AVG
9	6.9878	28.27	10.28	38.55	60.00	-21.45	QP
10	6.9878	18.70	10.28	28.98	50.00	-21.02	AVG
11	13.9763	27.01	10.51	37.52	60.00	-22.48	QP
12	13.9763	16.91	10.51	27.42	50.00	-22.58	AVG

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 110V/60Hz	Phase	Line
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

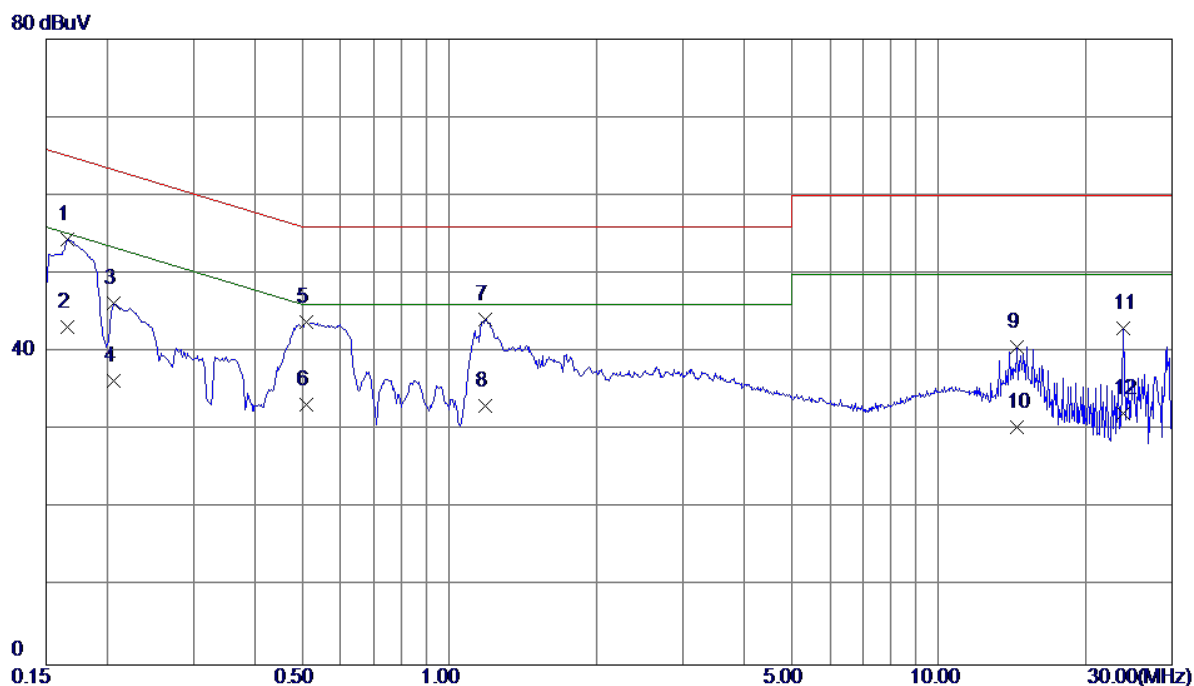

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1658	44.80	9.65	54.45	65.17	-10.72	QP
2	0.1658	33.50	9.65	43.15	55.17	-12.02	AVG
3	0.2063	36.53	9.69	46.22	63.35	-17.13	QP
4	0.2063	26.69	9.69	36.38	53.35	-16.97	AVG
5	0.5100	33.86	9.92	43.78	56.00	-12.22	QP
6	0.5100	23.40	9.92	33.32	46.00	-12.68	AVG
7	1.1849	33.93	10.22	44.15	56.00	-11.85	QP
8	1.1849	22.90	10.22	33.12	46.00	-12.88	AVG
9	14.4465	29.92	10.66	40.58	60.00	-19.42	QP
10	14.4465	19.80	10.66	30.46	50.00	-19.54	AVG
11	23.8898	32.30	10.75	43.05	60.00	-16.95	QP
12	23.8898	21.40	10.75	32.15	50.00	-17.85	AVG

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 110V/60Hz	Phase	Neutral
Test Mode	HDMI 1920*1080/60Hz		
Note	Cable:1.8m		
Test Engineer	Lucky Mao		

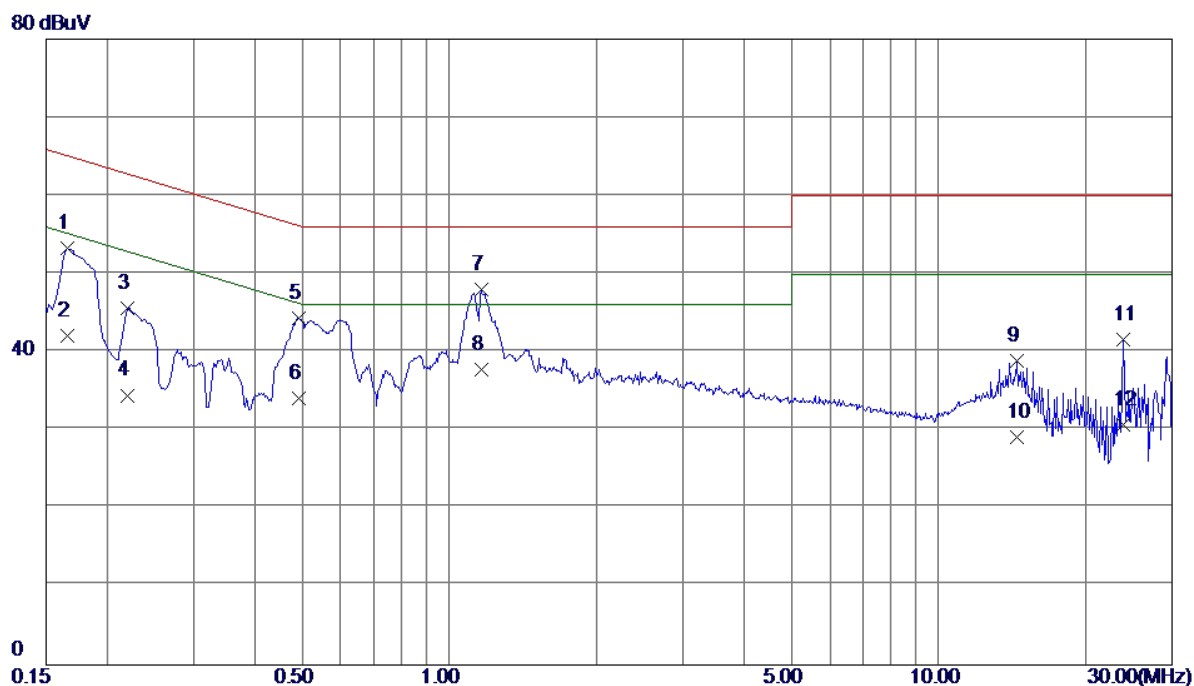

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1658	43.72	9.55	53.27	65.17	-11.90	QP
2	0.1658	32.50	9.55	42.05	55.17	-13.12	AVG
3	0.2198	35.93	9.68	45.61	62.83	-17.22	QP
4	0.2198	24.80	9.68	34.48	52.83	-18.35	AVG
5	0.4920	34.44	9.81	44.25	56.13	-11.88	QP
6	0.4920	24.30	9.81	34.11	46.13	-12.02	AVG
7 *	1.1625	38.06	9.93	47.99	56.00	-8.01	QP
8	1.1625	27.90	9.93	37.83	46.00	-8.17	AVG
9	14.4443	28.38	10.54	38.92	60.00	-21.08	QP
10	14.4443	18.61	10.54	29.15	50.00	-20.85	AVG
11	23.8898	30.86	10.75	41.61	60.00	-18.39	QP
12	23.8898	19.90	10.75	30.65	50.00	-19.35	AVG

## 4.3 HARMONIC CURRENT EMISSIONS TEST

### 4.3.1 LIMITS

EN 61000-3-2						
Equipment Category	Harmonic Order n	Max. Permissible Harmonic Current A	Equipment Category	Harmonic Order n	Max. Permissible Harmonic Current A      mA/w	
Class A	Odd Harmonics		Class D	Odd Harmonics only		
	3	2.30		3	2.30	3.4
	5	1.14		5	1.14	1.9
	7	0.77		7	0.77	1.0
	9	0.40		9	0.40	0.5
	11	0.33		11	0.33	0.35
	13	0.21		13	0.21	0.30
	15≤n≤39	0.15 x 15/n		15≤n≤39	0.15 x 15/n	3.85/n
	Even Harmonics					
	2	1.08				
	4	0.43				
	6	0.30				
	8≤n≤40	0.23 x 8/n				

### 4.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonic & Flicker	California	PACS-1	72344	Jul. 26, 2017
2	Power Source	California	3001iX	56309	Jul. 26, 2017
3	Measurement Software	California	CTS4.0 Version 4.9	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.  
All calibration period of equipment list is one year.


#### 4.3.3 TEST PROCEDURE

- a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.
- b. The classification of EUT is according to of EN 61000-3-2. The EUT is classified as follows:
  - Class A: Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.
  - Class B: Portable tools; Arc welding equipment which is not professional equipment.
  - Class C: Lighting equipment.
  - Class D: Equipment having a specified power less than or equal to 600 W of the following types: Personal computers and personal computer monitors and television receivers.
- c. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP

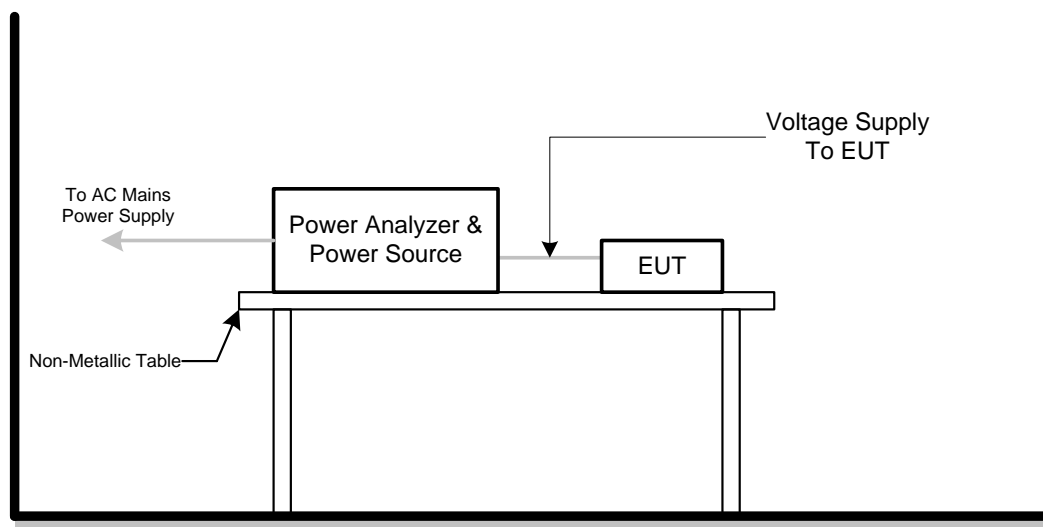


#### 4.3.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 unless otherwise a special operating condition is specified in the follows during the testing.


#### 4.3.7 TEST RESULTS

Harmonic - Class D			
EUT	23.8''(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	HDMI 1920*1080/60Hz		

Current & voltage waveforms

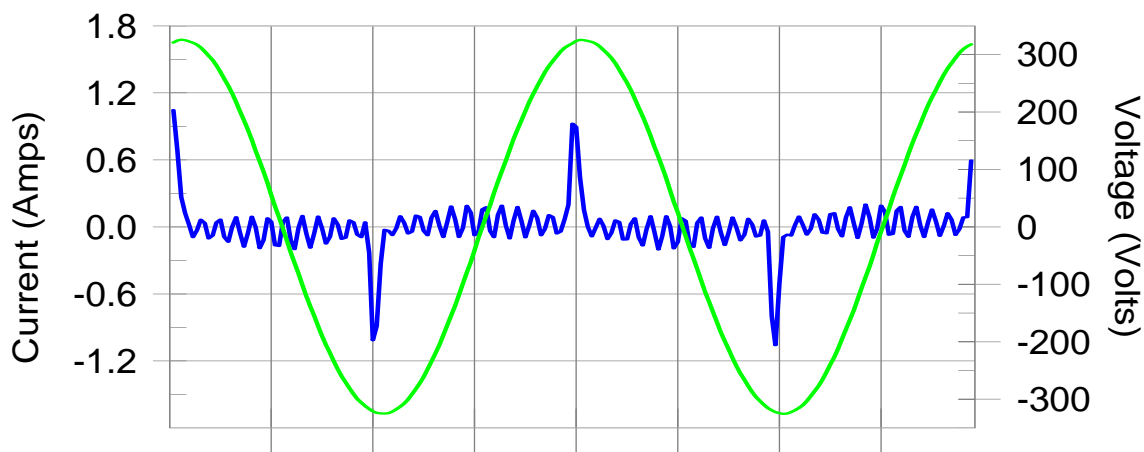

Harmonics and Class D limit line European Limits

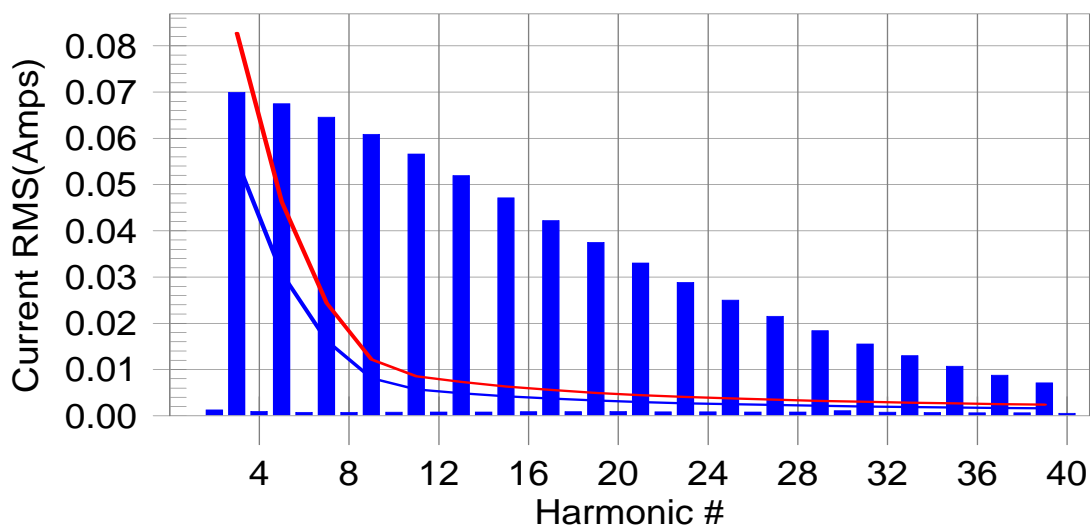

Test result: N/L Worst harmonic was #19 with 760.7% of the limit.

Current Test Result Summary (Run time)			
EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	HDMI 1920*1080/60Hz		

Highest parameter values during test:

V\_RMS (Volts): 229.99

I\_Peak (Amps): 1.142

I\_Fund (Amps): 0.083

Power (Watts): 16.2

Frequency(Hz): 50.00

I\_RMS (Amps): 0.217

Crest Factor: 5.298

Power Factor: 0.328

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	0.000	N/A	0.002	0.000	N/A	N/L
3	0.070	0.055	N/A	0.071	0.083	N/A	N/L
4	0.001	0.000	N/A	0.001	0.000	N/A	N/L
5	0.067	0.031	N/A	0.068	0.046	N/A	N/L
6	0.001	0.000	N/A	0.001	0.000	N/A	N/L
7	0.065	0.016	N/A	0.065	0.024	N/A	N/L
8	0.001	0.000	N/A	0.001	0.000	N/A	N/L
9	0.061	0.008	N/A	0.061	0.012	N/A	N/L
10	0.001	0.000	N/A	0.001	0.000	N/A	N/L
11	0.057	0.006	N/A	0.057	0.009	N/A	N/L
12	0.001	0.000	N/A	0.001	0.000	N/A	N/L
13	0.052	0.005	N/A	0.052	0.007	N/A	N/L
14	0.001	0.000	N/A	0.001	0.000	N/A	N/L
15	0.047	0.004	N/A	0.047	0.006	N/A	N/L
16	0.001	0.000	N/A	0.001	0.000	N/A	N/L
17	0.042	0.004	N/A	0.042	0.006	N/A	N/L
18	0.001	0.000	N/A	0.001	0.000	N/A	N/L
19	0.038	0.003	N/A	0.038	0.005	N/A	N/L
20	0.001	0.000	N/A	0.001	0.000	N/A	N/L
21	0.033	0.003	N/A	0.033	0.004	N/A	N/L
22	0.001	0.000	N/A	0.001	0.000	N/A	N/L
23	0.029	0.003	N/A	0.029	0.004	N/A	N/L
24	0.001	0.000	N/A	0.001	0.000	N/A	N/L
25	0.025	0.002	N/A	0.025	0.004	N/A	N/L
26	0.001	0.000	N/A	0.001	0.000	N/A	N/L
27	0.022	0.002	N/A	0.022	0.003	N/A	N/L
28	0.001	0.000	N/A	0.001	0.000	N/A	N/L
29	0.018	0.002	N/A	0.019	0.003	N/A	N/L
30	0.001	0.000	N/A	0.001	0.000	N/A	N/L
31	0.016	0.002	N/A	0.016	0.003	N/A	N/L
32	0.001	0.000	N/A	0.001	0.000	N/A	N/L
33	0.013	0.002	N/A	0.013	0.003	N/A	N/L
34	0.001	0.000	N/A	0.001	0.000	N/A	N/L
35	0.011	0.002	N/A	0.011	0.003	N/A	N/L
36	0.001	0.000	N/A	0.001	0.000	N/A	N/L
37	0.009	0.002	N/A	0.009	0.003	N/A	N/L
38	0.001	0.000	N/A	0.001	0.000	N/A	N/L
39	0.007	0.002	N/A	0.007	0.002	N/A	N/L
40	0.001	0.000	N/A	0.001	0.000	N/A	N/L

Note: The EUT power level is below 75.0 Watts and therefore has no defined limits



Voltage Source Verification Data (Run time)			
EUT	23.8''(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	HDMI 1920*1080/60Hz		

Highest parameter values during test:

Voltage (Vrms):229.99	Frequency(Hz): 50.00
I_Peak (Amps):1.142	I_RMS (Amps): 0.217
I_Fund (Amps):0.083	Crest Factor: 5.298
Power (Watts): 16.2	Power Factor: 0.328

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.118	0.460	25.76	OK
3	0.599	2.070	28.96	OK
4	0.056	0.460	12.26	OK
5	0.089	0.920	9.64	OK
6	0.020	0.460	4.26	OK
7	0.049	0.690	7.08	OK
8	0.019	0.460	4.02	OK
9	0.031	0.460	6.72	OK
10	0.019	0.460	4.20	OK
11	0.045	0.230	19.61	OK
12	0.014	0.230	6.24	OK
13	0.030	0.230	12.89	OK
14	0.007	0.230	2.84	OK
15	0.045	0.230	19.65	OK
16	0.015	0.230	6.34	OK
17	0.028	0.230	12.22	OK
18	0.015	0.230	6.43	OK
19	0.037	0.230	15.99	OK
20	0.015	0.230	6.65	OK
21	0.036	0.230	15.62	OK
22	0.011	0.230	4.79	OK
23	0.037	0.230	15.93	OK
24	0.007	0.230	3.06	OK
25	0.026	0.230	11.19	OK
26	0.007	0.230	3.26	OK
27	0.027	0.230	11.57	OK
28	0.008	0.230	3.30	OK
29	0.028	0.230	12.27	OK
30	0.006	0.230	2.60	OK
31	0.024	0.230	10.39	OK
32	0.005	0.230	2.28	OK
33	0.024	0.230	10.42	OK
34	0.004	0.230	1.87	OK
35	0.015	0.230	6.34	OK
36	0.003	0.230	1.34	OK
37	0.015	0.230	6.70	OK
38	0.004	0.230	1.92	OK
39	0.013	0.230	5.75	OK
40	0.007	0.230	3.23	OK

#### 4.4 VOLTAGE CHANGES, VOLTAGE FLUCTUATIONS AND FLICKER TEST

##### 4.4.1 LIMITS

Tests	Limits	Descriptions
	EN 61000-3-3	
Pst	$\leq 1.0$ , $T_p = 10$ min.	Short Term Flicker Indicator
Plt	$\leq 0.65$ , $T_p = 2$ hr.	Long Term Flicker Indicator
dc	$\leq 3.3\%$	Relative Steady-State V-Chang
dmax	$\leq 4\%$	Maximum Relative V-change
d (t)	$\leq 3.3\%$ for $> 500$ ms	Relative V-change characteristic

##### 4.4.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonic & Flicker	California	PACS-1	72344	Jul. 26, 2017
2	Power Source	California	3001iX	56309	Jul. 26, 2017
3	Measurement Software	California	CTS4.0 Version 4.9	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


##### 4.4.3 TEST PROCEDURE

- Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in EN 61000-3-3 depend on which standard adopted for compliance measurement.
- All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

##### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TESTSETUP

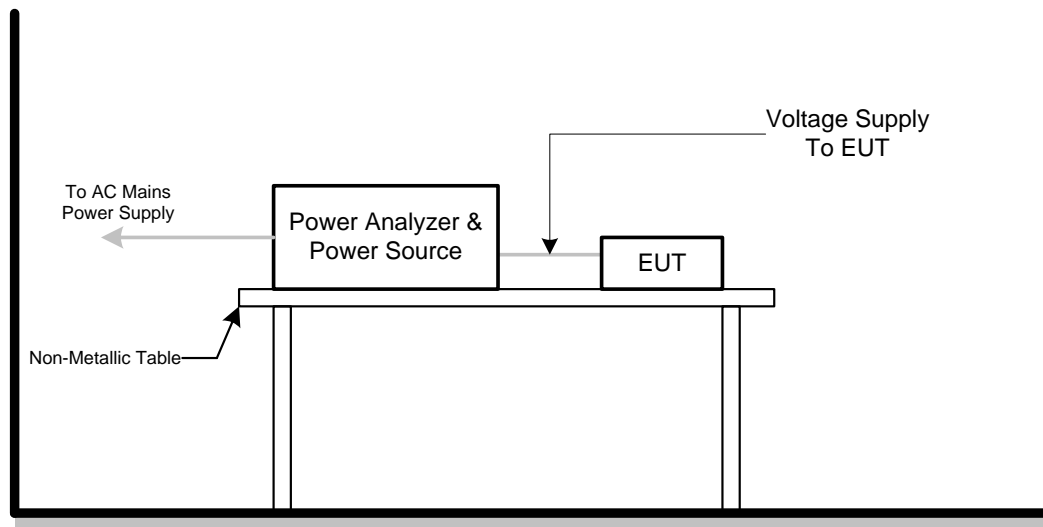

#### 4.4.6 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of **4.1.6** unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.4.7 TEST RESULTS


EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	HDMI 1920*1080/60Hz		

Psti and limit line

European Limits

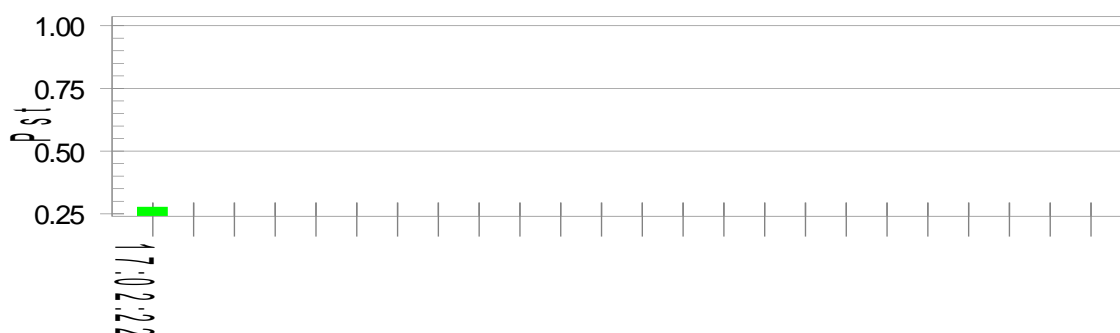

Plt and limit line

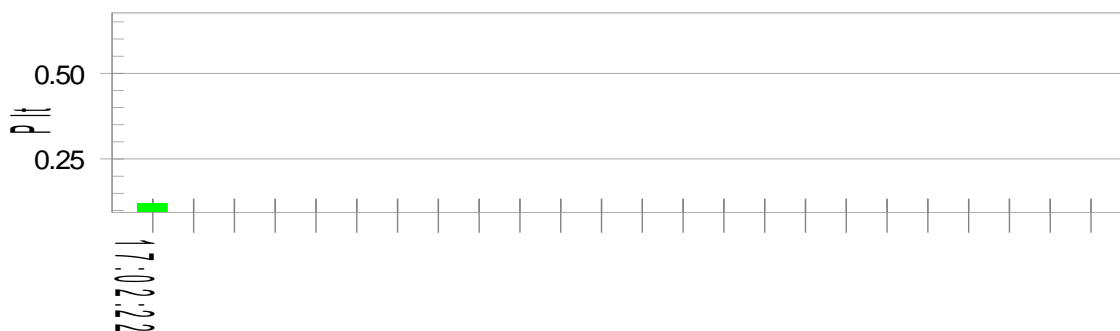

Parameter values recorded during the test:

Vrms at the end of test (Volt):229.94

Highest dt (%): 0.00

T-max (mS): 0

Highest dc (%): 0.00

Highest dmax (%): 0.04

Highest Pst (10 min. period): 0.277

Highest Plt (2 hr. period): 0.121

Test limit (%): N/A N/A

Test limit (mS): 500.0 Pass

Test limit (%): 3.30 Pass

Test limit (%): 4.00 Pass

Test limit: 1.000 Pass

Test limit: 0.650 Pass

## 5. EMC IMMUNITY TEST

### 5.1 STANDARD COMPLIANCE/SERVIRITY LEVEL/CRITERIA

Tests Standard No.	Test Specification Level / Test Mode	Test Ports	Criteria
Electrostatic discharge EN 61000-4-2 (ESD)	±8 kV air discharge ±4 kV contact discharge (Direct Mode)	Enclosure	B
	±4kV HCP discharge ±4kV VCP discharge (Indirect Mode)	Enclosure	B
Radiated, radio-frequency, electromagnetic field immunity EN 61000-4-3 (RS)	80 MHz to 1000 MHz 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Electrical fast transient/burst immunity EN 61000-4-4 (EFT/Burst)	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency (100kHz Repetition Frequency for xDSL equipment )	Signal ports and telecommunication ports (Only applicable to cable length>3 m)	B
	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	DC Power Ports	B
	±1 kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	AC Power Ports	B
Surge immunity EN 61000-4-5 (Surges)	±1 kV(peak) 10/700 Tr/Th μs(NOTE) (without primary protection)	Signal ports and telecommunication ports (applicable only to ports connect directly to outdoor cables)	C
	±4 kV(peak) 10/700 Tr/Th μs(NOTE) (with primary protectors fitted)		C
	±0.5 kV(peak) 1.2/50(8/20) Tr/Th μs	DC Power Ports (applicable only to ports connect directly to outdoor cables)	B
	±1 kV(peak) 1.2/50(8/20) Tr/Th μs (line to line)	AC Power Ports	B
	±2 kV(peak) 1.2/50(8/20) Tr/Th μs (line to earth or ground)		B

Immunity to conducted disturbances, induced by radio-frequency fields EN 61000-4-6 (Injected Current)	0.15 MHz to 80 MHz 3V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	Signal ports and telecommunication ports (Only applicable to cable length>3 m)	A
	0.15 MHz to 80 MHz 3V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	DC Power Ports	A
	0.15 MHz to 80 MHz 3V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	AC Power Ports	A
Power frequency magnetic field immunity EN 61000-4-8 (PFMF)	50 Hz or 60Hz, 1A/m(r.m.s) μs	Enclosure	A
Voltage dips, short interruptions and voltage variations immunity EN 61000-4-11 (Voltage Interruption/Dips)	Voltage reduction > 95% 0.5 period Voltage reduction 30% 25 periods Voltage reduction > 95% 250 periods	AC Power Ports	B C C

Note.

Where the coupling network for the 10/700 μs waveform affects the functioning of high speed data ports, the test shall be carried out using a 1,2/50 (8/20) μs waveform and appropriate coupling network.

## 5.2 GENERAL PERFORMANCE CRITERIA

According to **EN55024** standard, the general performance criteria as following:

<b>Criterion A</b>	<p>The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.</p> <p>If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.</p>
<b>Criterion B</b>	<p>After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomenon below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.</p> <p>During the test, degradation of performance is allowed. However, no change of operating state if stored data allowed to persist after the test. If the minimum performance level (or the permissible performance loss ) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.</p>
<b>Criterion C</b>	<p>Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.</p> <p>Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</p>

## 5.3 GENERAL PERFORMANCE CRITERIA TEST SETUP

The EUT tested system was configured as the statements of **3.3** unless otherwise a special operating condition is specified in the follows during the testing.

## 5.4 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

### 5.4.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-2
Discharge Impedance	330 ohm / 150 pF
Required Performance	B
Discharge Voltage	Air Discharge: $\pm 2$ kV, $\pm 4$ kV, $\pm 8$ kV (Direct) Contact Discharge: $\pm 2$ kV, $\pm 4$ kV (Direct/Indirect)
Polarity	Positive & Negative
Number of Discharge	Air Discharge: min. 20 times at each test point Contact Discharge: min. 200 times in total
Discharge Mode	Single Discharge
Discharge Period	1 second minimum

### 5.4.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	ESD Generator	TESEQ AG	NSG 437	450	Oct. 28, 2016

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 5.4.3 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- a. Contact discharge was applied to conductive surfaces (Direct) and coupling planes (Indirect) of the EUT.

During the test, it was performed with single discharges. For the single discharge time between successive single discharges was at least 1 second. The EUT shall be exposed to at least 200 discharges, 100 each at negative and positive polarity, at a minimum of four test points. One of the test points shall be subjected to at least 50 indirect discharges to the center of the front edge of the horizontal coupling plane. The remaining three test points shall each receive at least 50 direct contact discharges.

If no direct contact test points are available, then at least 200 indirect discharges shall be applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

- b. Air discharges at insulation surfaces of the EUT.


It was at least ten single discharges with positive and negative at the same selected point.



#### 5.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 5.4.5 TEST SETUP

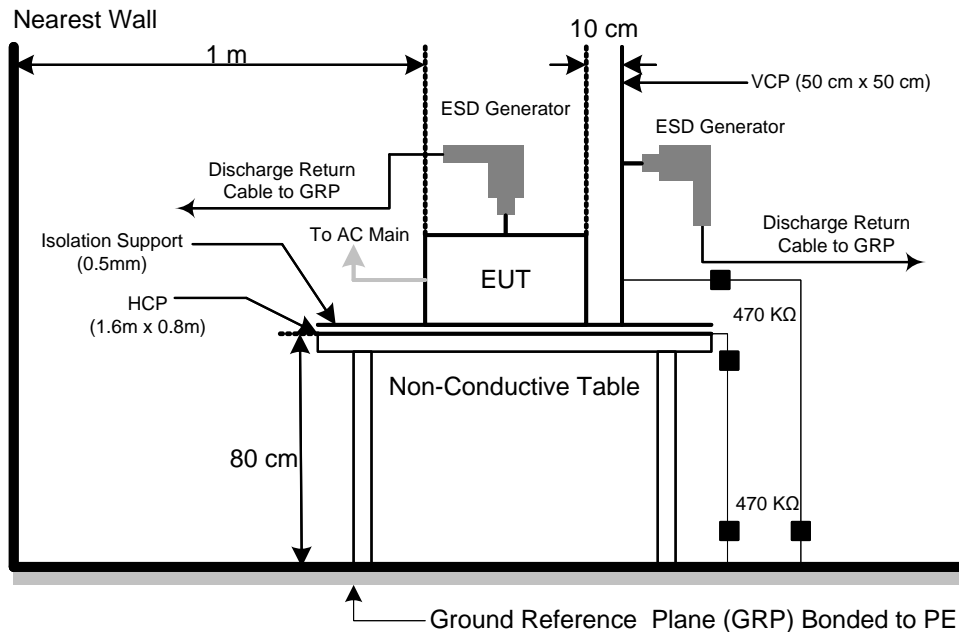

Note:

##### TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test was installed in a representative system as described in EN 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

##### FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in EN 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

## 5.4.6 TEST RESULTS

EUT	23.8''(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	42%
Test Voltage	AC 230V/50Hz	Pressure	1010hPa
Test Mode	HDMI 1920*1080/60Hz		



Mode	Air Discharge								Contact Discharge					
	2kV		4kV		8kV		- kV		2kV		4kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N	P	N
1	A	A	A	A	A	A	-	-	A	A	B	B	-	-
2	A	A	A	A	A	A	-	-	-	-	-	-	-	-
3	A	A	A	A	A	A	-	-	-	-	-	-	-	-
4	A	A	A	A	A	A	-	-	-	-	-	-	-	-
5	A	A	A	A	A	A	-	-	-	-	-	-	-	-
Criteria	B						-		B				-	
Result	A						-		B				-	
Judgment	PASS						-		PASS				-	


Mode	HCP Contact Discharge						VCP Contact Discharge					
	2kV		4kV		- kV		2kV		4kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N
1	A	A	A	A	-	-	A	A	A	A	-	-
2	A	A	A	A	-	-	A	A	A	A	-	-
3	A	A	A	A	-	-	A	A	A	A	-	-
4	A	A	A	A	-	-	A	A	A	A	-	-
Criteria	B						B					
Result	A						A					
Judgment	PASS						PASS					

Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) Test condition:  
Direct/Indirect(HCP/VCP) discharges: Minimum 50 times (Positive/Negative) at eachpoint.  
Air discharges: Minimum 20 times (Positive/Negative) at each point.
- 3) Test location(s) in which discharge (Air and contact discharge) to be applied illustrated by photos shown in next page(s)
- 4) The Indirect (HCP/VCP) discharges description of test point as following:  
1.left side; 2.right side; 3.front side; 4.rear side.
- 5) N/A - denotes test is not applicable in this test report
- 6) Criterion A: No observation of any performance degradation.
- 7) Criterion B: Some degradation of performance is observed but the equipment continues to operate as intended.
- 8) Criterion C: Loss of functionality, but self-recoverable by user, without loss of information or settings.

PHOTO(S) SHOWN THE LOCATION(S) OF ESD EVALUATED

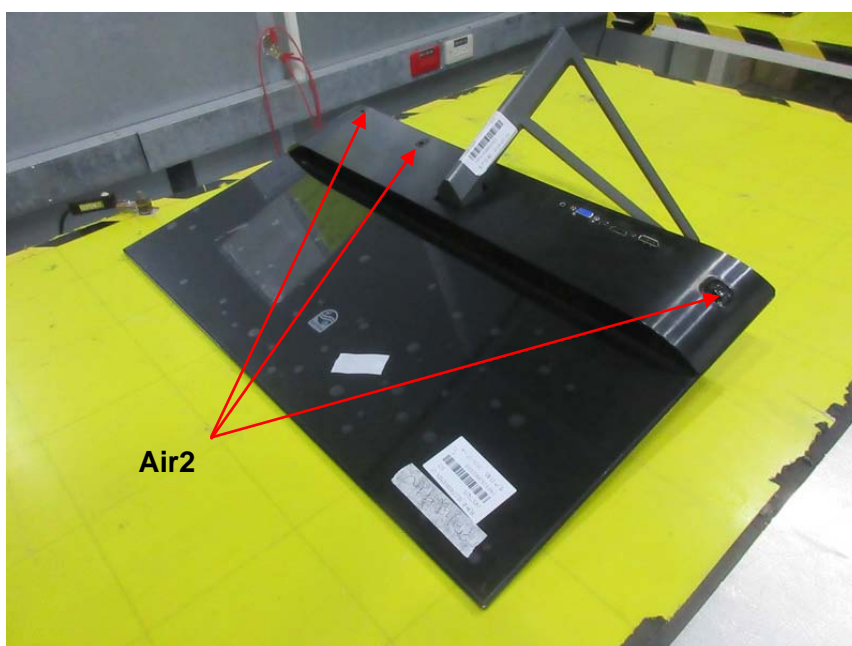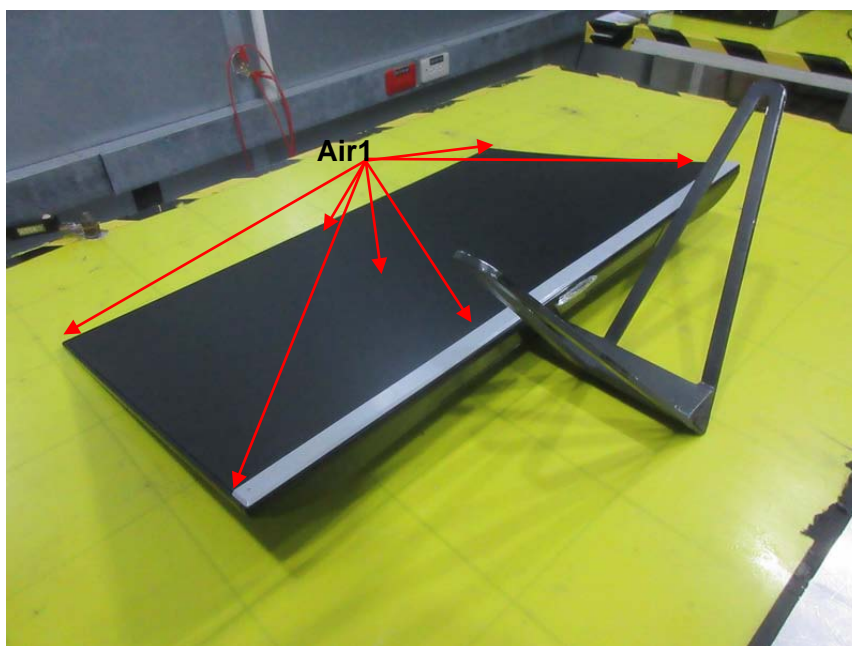

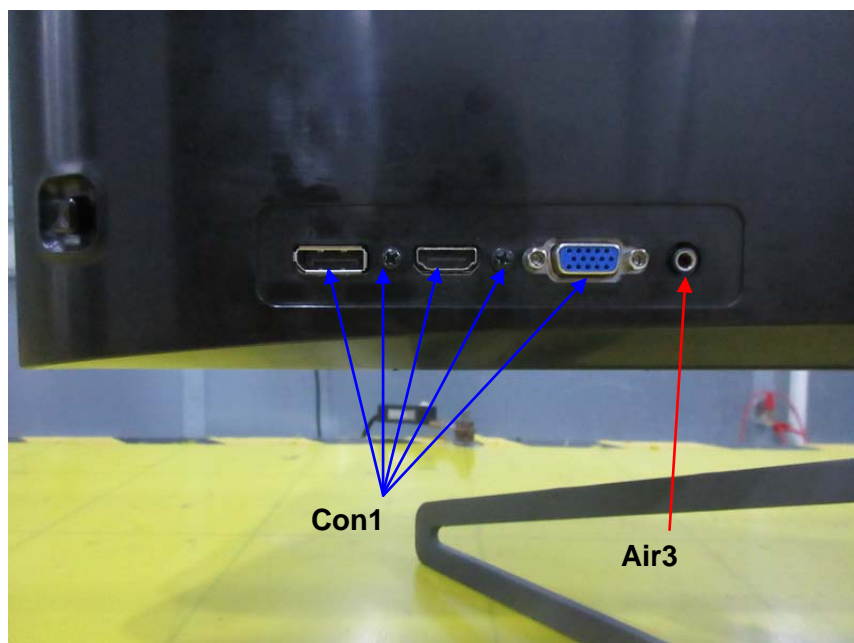



## 5.5 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

### 5.5.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-3
Required Performance	A
Frequency Range	80 MHz - 1000 MHz
Field Strength	3 V/m(unmodulated, r.m.s)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of fundamental
Polarity of Antenna	Horizontal and Vertical
Test Distance	3 m
Antenna Height	1.5 m
Dwell Time	at least 3 seconds

### 5.5.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Digital Signal Generator	HP	ESG-D3000A	US36260188	Mar. 27, 2017
2	Antenna	ETS	3142C	00047662	Mar. 27, 2017
3	Power amplifier	MILMEGA	80RF1000-250	1064833	Nov. 02, 2017
4	Measurement Software	TOYO	IM5/R Ver 3.8.050	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 5.5.3 TEST PROCEDURE

The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber.

The testing distance from antenna to the EUT was 3 meters.

The other condition as following manner:


- The field strength level was 3 V/m(unmodulated, r.m.s).
- The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80%amplitude modulated with a 1 kHz sine wave. The rate of sweep did not exceed  $1.5 \times 10^{-3}$  decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

### 5.5.4 DEVIATION FROM TEST STANDARD

No deviation



### 5.5.5 TEST SETUP

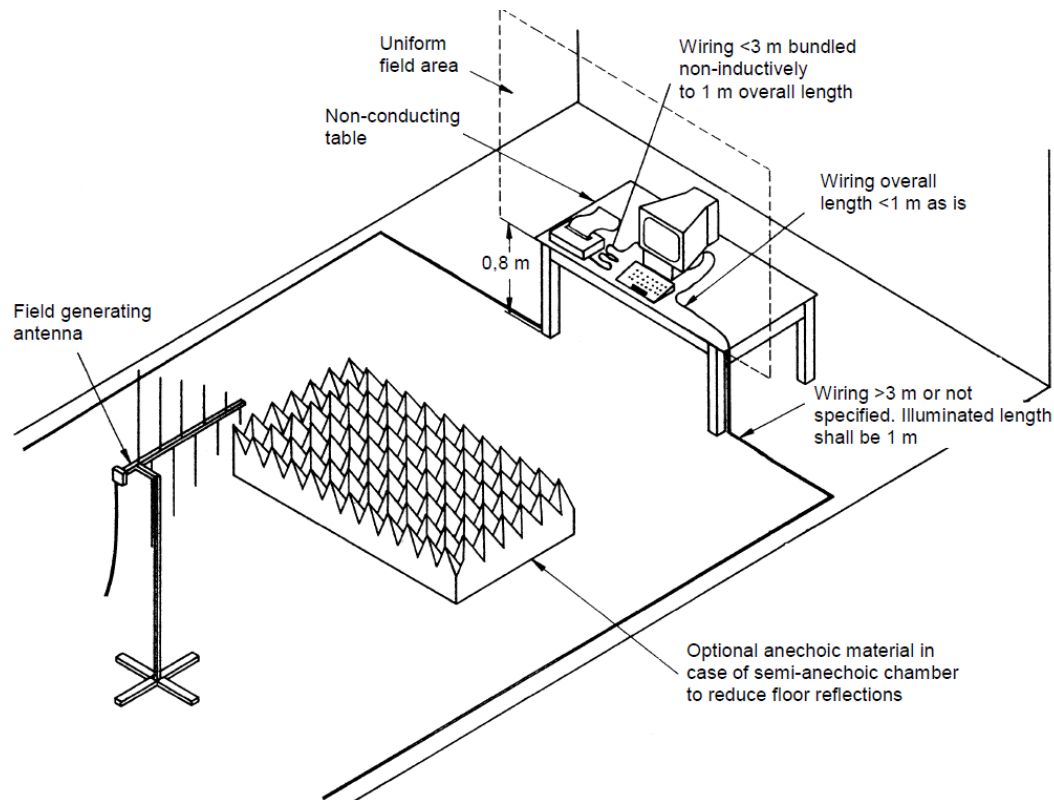

Note:

#### TABLE-TOP EQUIPMENT

The EUT installed in a representative system as described in EN 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

#### FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in EN 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

## 5.5.6 TEST RESULTS

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	HDMI 1920*1080/60Hz		

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Azimuth	Criterion	Result	Judgment
80 - 1000	H / V	3V (unmodulated, r.m.s) AM Modulated 1000Hz, 80%	0	A	A	PASS
			90			
			180			
			270			

### Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) N/A - denotes test is not applicable in this test report.
- 3) Criterion A: No observation of any performance degradation.
- 4) Criterion B: Some degradation of performance is observed but the equipment continues to operate as intended.
- 5) Criterion C: Loss of functionality, but self-recoverable by user, without loss of information or settings.



## 5.6 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT/BURST)

### 5.6.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-4
Required Performance	B
Test Voltage	Power Line: $\pm 1$ kV
Polarity	Positive & Negative
Impulse Frequency	5 kHz: except for xDSL equipment 100 kHz: only for single lines of xDSL equipment.
Impulse Wave shape	5/50 ns
Burst Duration	15 ms
Burst Period	300 ms
Test Duration	Not less than 1 min.

### 5.6.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	THE MODULAR SOLUTION FOR 6 KV APPLICATIONS	Teseq	NSG 3060	1423	Oct. 11, 2016
2	Measurement Software	Teseq	Win 3000 Version 1.2.0	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 5.6.3 TEST PROCEDURE

The EUT and support equipment(s) are placed on a table that is 0.8 meter high above a metal ground plane and should be located 0.1 m $\pm$  0.01m high above the Ground Reference Plane (1m\*1m min. and 0.65mm thick min).



The other condition as following manner:

- The length of power cord between the coupling device and the EUT should not exceed 1 meter.
- Both positive and negative polarity discharges were applied.
- The duration time of each test sequential was 1 minute

### 5.6.4 DEVIATION FROM TEST STANDARD

No deviation

## 5.6.5 TEST SETUP

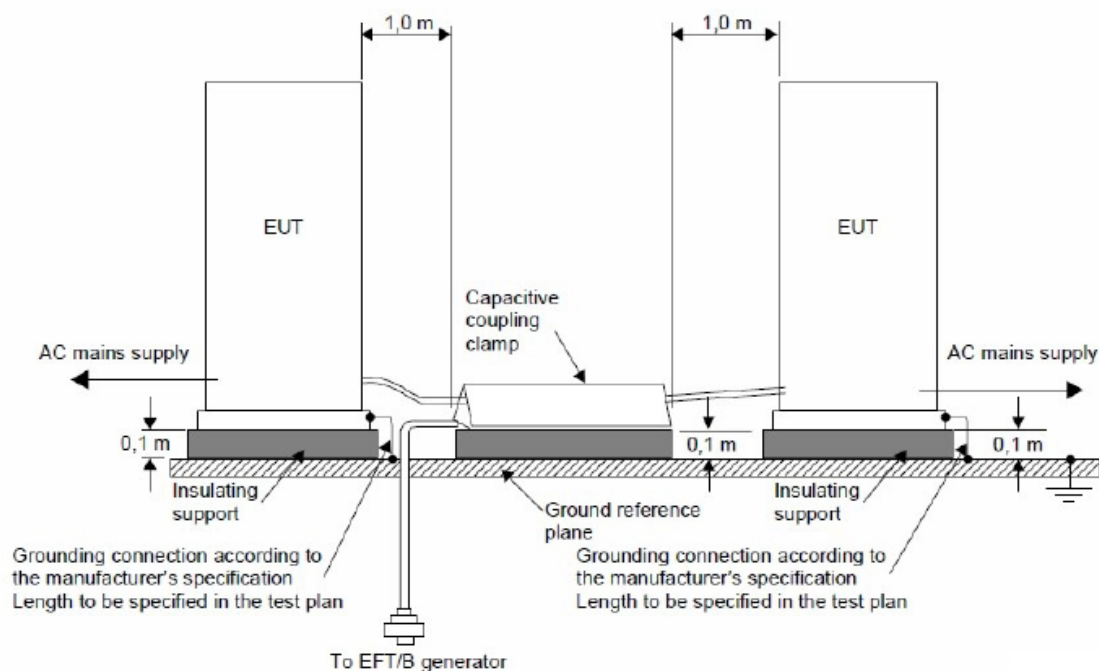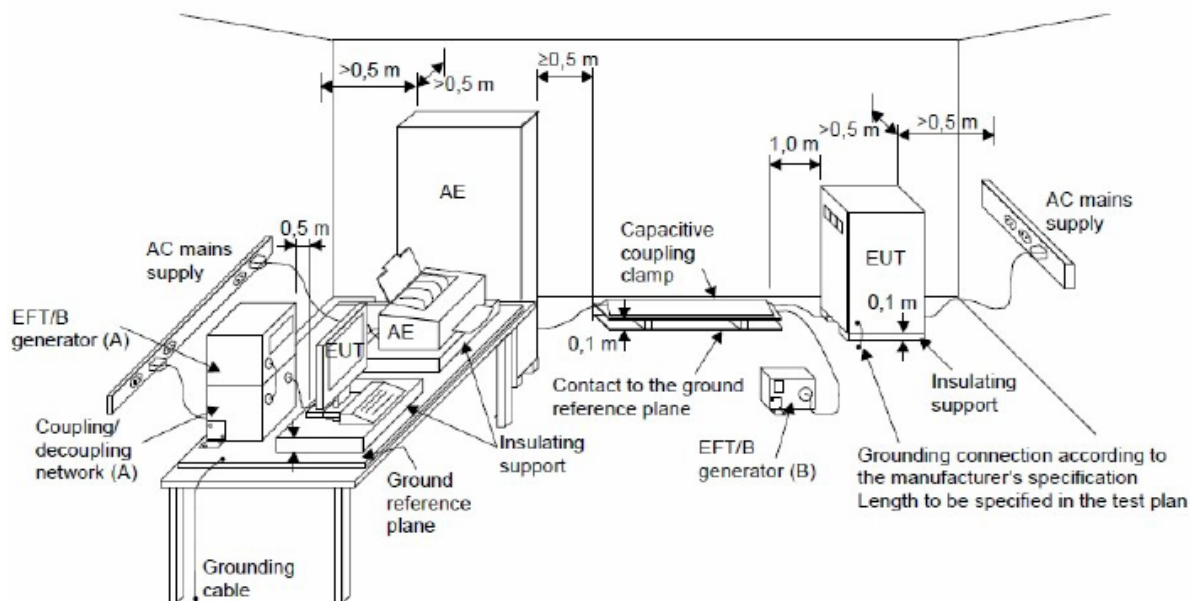

Note:

### TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane and should be located 0.1 m+/- 0.01m above the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

### FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in EN 61000-4-4 and its cables were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system.

## 5.6.6 TEST RESULTS

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	52%
Test Voltage	AC 230V/50Hz		
Test Mode	HDMI 1920*1080/60Hz		

EUT Ports Tested		Polarity	Repetition Frequency	Test Level	Criterion	Result	Judgment
				1kV			
AC Power Port	Line (L)	+	5 kHz	A	B	A	PASS
		-	5 kHz	A			
	Neutral (N)	+	5 kHz	A	B	A	PASS
		-	5 kHz	A			
	Ground (PE)	+	5 kHz	A	B	A	PASS
		-	5 kHz	A			

### Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) N/A - denotes test is not applicable in this test report
- 3) Criterion A: No observation of any performance degradation.
- 4) Criterion B: Some degradation of performance is observed but the equipment continues to operate as intended.
- 5) Criterion C: Loss of functionality, but self-recoverable by user, without loss of information or settings.

## 5.7 SURGE IMMUNITY TEST

### 5.7.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-5
Required Performance	B
Wave-Shape	Combination Wave for power lines 1.2/50 us Open Circuit Voltage 8 /20 us Short Circuit Current
Test Voltage	Power Line: $\pm 0.5$ kV, $\pm 1$ kV, $\pm 2$ kV
Surge Input/Output	L-N, L-PE, N-PE
Generator Source Impedance	2 ohm between networks 12 ohm between network and ground
Polarity	Positive/Negative
Phase Angle:	AC Port: $0^\circ/90^\circ/180^\circ/270^\circ$
Pulse Repetition Rate	1 time / min. (maximum)
Number of Tests	5 positive and 5 negative at selected points

### 5.7.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	THE MODULAR SOLUTION FOR 6 KV APPLICATIONS	Teseq	NSG 3060	1423	Oct. 11, 2016
2	Measurement Software	Teseq	Win 3000 Version 1.2.0	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 5.7.3 TEST PROCEDURE

#### a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2meters in length (or shorter).

#### b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT :

The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).


#### c. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT :

The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

#### 5.7.4 DEVIATION FROM TEST STANDARD

No deviation

#### 5.7.5 TEST SETUP

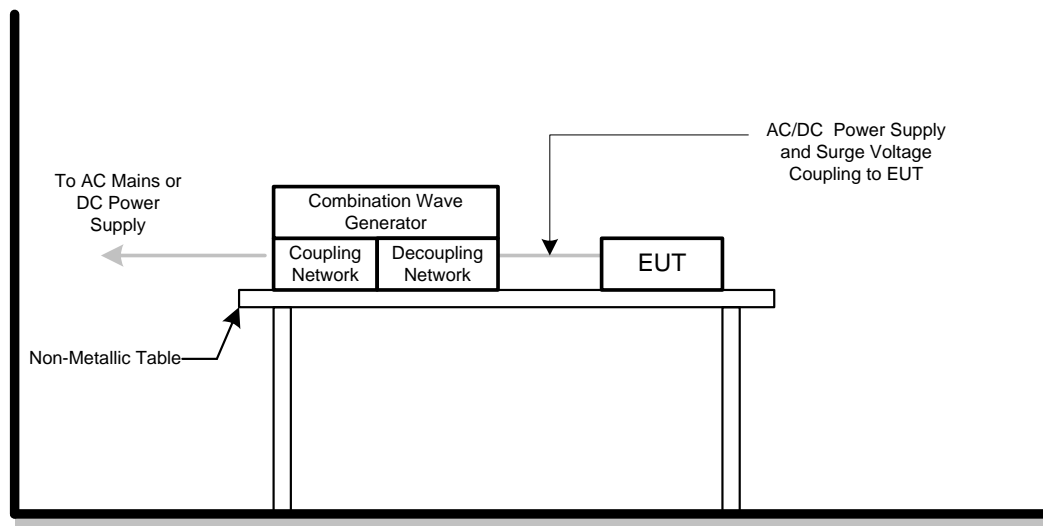

## 5.7.6 TEST RESULTS

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	52%
Test Voltage	AC 230V/50Hz		
Test Mode	HDMI 1920*1080/60Hz		

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Thµs						Criterion	Result	Judgment
		Polarity	Phase	Voltage						
				0.5kV	1kV	-- kV	-- kV			
AC	L – N (2 ohm)	+/-	0°	A	A	-	-	B	A	PASS
		+/-	90°	A	A	-	-			
		+/-	180°	A	A	-	-			
		+/-	270°	A	A	-	-			

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Thµs						Criterion	Result	Judgment
		Polarity	Phase	Voltage						
				0.5kV	1kV	2kV	-- kV			
AC	L – PE (12 ohm)	+/-	0°	A	A	A	-	B	A	PASS
		+/-	90°	A	A	A	-			
		+/-	180°	A	A	A	-			
		+/-	270°	A	A	A	-			
	N – PE (12 ohm)	+/-	0°	A	A	A	-	B	A	PASS
		+/-	90°	A	A	A	-			
		+/-	180°	A	A	A	-			
		+/-	270°	A	A	A	-			

Note:

- 1) Polarity and Numbers of Impulses: 5 Pst / Ngst at each tested mode
- 2) N/A - denotes test is not applicable in this Test Report
- 3) Criterion A: No observation of any performance degradation.
- 4) Criterion B: Some degradation of performance is observed but the equipment continues to operate as intended.
- 5) Criterion C: Loss of functionality, but self-recoverable by user, without loss of information or settings.

## 5.8 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS TEST (CS)

### 5.8.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-6
Required Performance	A
Frequency Range	0.15 MHz - 80 MHz
Field Strength	3 V (unmodulated, r.m.s.)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of fundamental
Dwell Time	at least 3 seconds

### 5.8.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Signal Generator	HP	8648A	3636A02964	Mar. 27, 2017
2	Power Amplifier	Teseq	CBA230M-080	T43748	Mar. 27, 2017
3	Power CDN	FCC	FCC-801-M2/M3-16A	100271	Mar. 27, 2017
4	Measurement Software	TOYO	IM5/C Ver 3.7.028	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 5.8.3 TEST PROCEDURE

The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m\*1m min. and 0.65mm thick min.


The other condition as following manner:

- The field strength level was 3 V (unmodulated, r.m.s.)
- The frequency range is swept from 150 kHz to 80 MHz, with the signal 80%amplitude modulated with a 1 kHz sine wave. The rate of sweep did not exceed  $1.5 \times 10^{-3}$  decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.

### 5.8.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.8.5 TEST SETUP

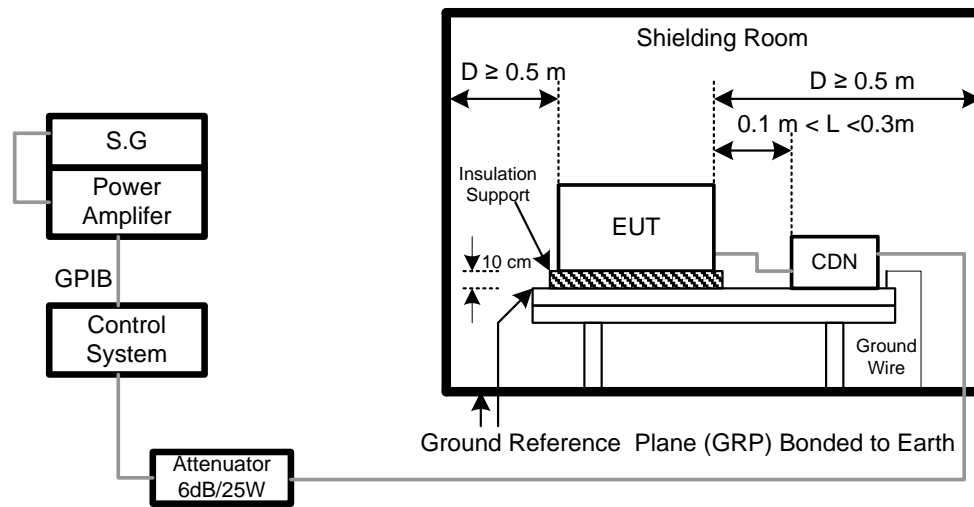

#### NOTE:

##### FLOOR-STANDING EQUIPMENT

The equipment to be tested is placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.



## 5.8.6 TEST RESULTS

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	HDMI 1920*1080/60Hz		

Test Ports (Mode)	Freq.Range (MHz)	Field Strength	Criteria	Results	Judgment
Input/ Output AC.PowerPort	0.15 ---80	3V(unmodulated, r.m.s) AM Modulated 1000Hz, 80%	A	A	PASS

### Note:

- 1). N/A - denotes test is not applicable in this test report.
- 2) Criterion A: No observation of any performance degradation.
- 3) Criterion B: Some degradation of performance is observed but the equipment continues to operate as intended.
- 4) Criterion C: Loss of functionality, but self-recoverable by user, without loss of information or settings.

## 5.9 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)

### 5.9.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-8
Required Performance	A
Frequency Range	50/60 Hz
Field Strength	1 A/m
Observation Time	1 minute
Inductance Coil	Rectangular type, 1mx1m

### 5.9.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Magnetic Field Test Generator	FCC	F-1000-4-8-G-125A	04032	Mar. 27, 2017
2	Magnetic Field immunity loop	Thermo KeyTek	F-1000-4-8/9/10-L-1M	04024	Mar. 27, 2017

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 5.9.3 TEST PROCEDURE

The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m\*1m min. and 0.65mm thick min.


The other condition as following manner:

- The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

### 5.9.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.9.5 TEST SETUP

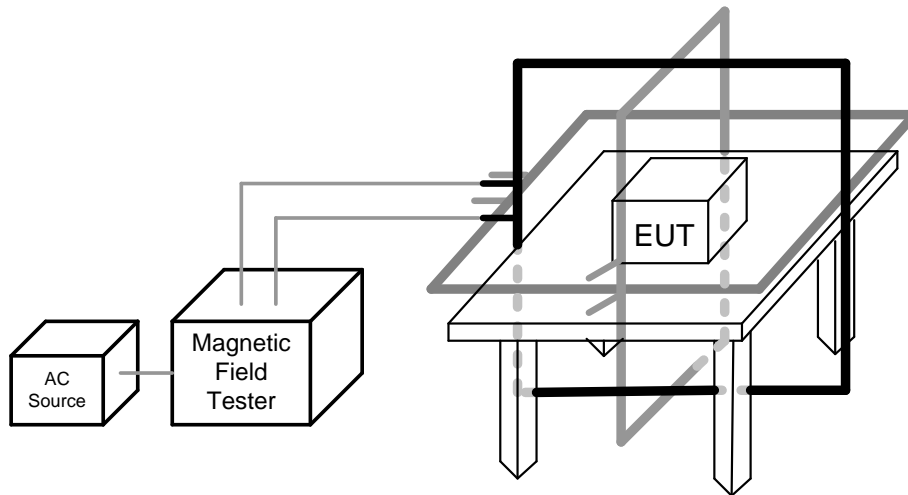

Note:

#### TABLE-TOP EQUIPMENT

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

#### FLOOR-STANDING EQUIPMENT

The equipment shall be subjected to the test magnetic field by using induction coils of suitable dimensions. The test shall be repeated by moving and shifting the induction coils, in order to test the whole volume of the EUT for each orthogonal direction. The test shall be repeated with the coil shifted to different positions along the side of the EUT, in steps corresponding to 50 percent of the shortest side of the coil. The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

## 5.9.6 TEST RESULTS

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	52%
Test Voltage	AC 230V/50Hz		
Test Mode	HDMI 1920*1080/60Hz		

### 50Hz

Test Mode	Test Level	Antenna aspect	Duration (s)	Criteria	Results	Judgment
Enclosure	1 A/m	X	60	A	A	PASS
Enclosure	1 A/m	Y	60	A	A	PASS
Enclosure	1 A/m	Z	60	A	A	PASS

### 60Hz

Test Mode	Test Level	Antenna aspect	Duration (s)	Criteria	Results	Judgment
Enclosure	1 A/m	X	60	A	A	PASS
Enclosure	1 A/m	Y	60	A	A	PASS
Enclosure	1 A/m	Z	60	A	A	PASS

#### Note:

- 1). N/A - denotes test is not applicable in this test report.
- 2) Criterion A: No observation of any performance degradation.
- 3) Criterion B: Some degradation of performance is observed but the equipment continues to operate as intended.
- 4) Criterion C: Loss of functionality, but self-recoverable by user, without loss of information or settings.

## 5.10 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY TEST

### 5.10.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-11
Required Performance	B (For >95% Voltage Dips) C (For 30% Voltage Dips) C (For >95% Voltage Interruptions)
Test Duration Time	Minimum three test events in sequence
Interval between Event	Minimum ten seconds
Phase Angle	0°/180°
Test Cycle	3 times

### 5.10.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	THE MODULAR SOLUTION FOR 6 KV APPLICATIONS	Teseq	NSG 3060	1423	Oct. 11, 2016
2	Measurement Software	Teseq	Win 3000 Version 1.2.0	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.  
All calibration period of equipment list is one year.


### 5.10.3 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

### 5.10.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.10.5 TEST SETUP

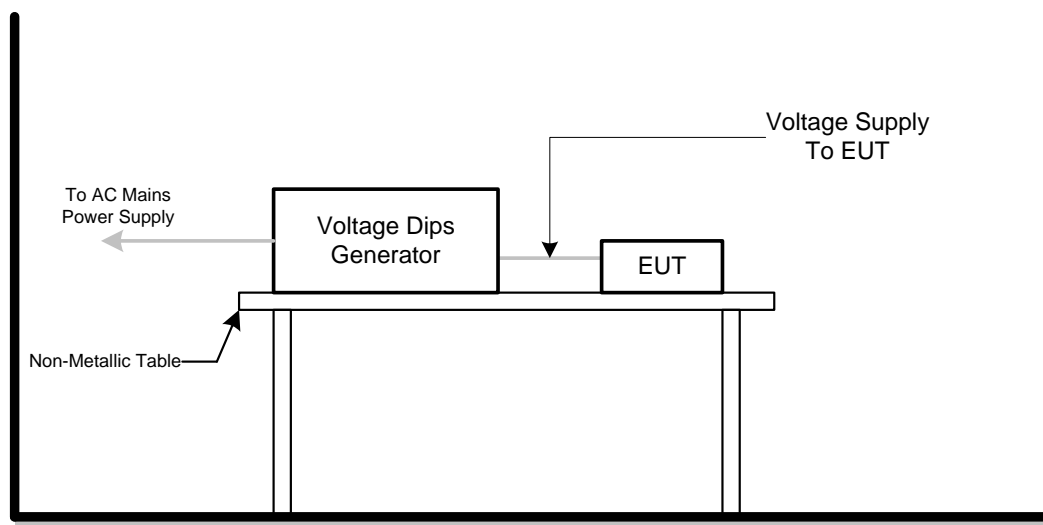

## 5.10.6 TEST RESULTS

EUT	23.8"(60.5cm)LCD Monitor	Model Name	245C7Q
Temperature	25°C	Relative Humidity	52%
Test Voltage	AC 230V/50Hz		
Test Mode	HDMI 1920*1080/60Hz		

AC 100V/50Hz				
VoltageReduction	Periods	Criteria	Results	Judgment
Voltage dip > 95%	0.5	B	A	PASS
Voltage dip 30%	25	C	A	PASS
Interruption > 95%	250	C	C	PASS

AC 230V/50Hz				
VoltageReduction	Periods	Criteria	Results	Judgment
Voltage dip > 95%	0.5	B	A	PASS
Voltage dip 30%	25	C	A	PASS
Interruption > 95%	250	C	C	PASS



AC 240V/50Hz				
VoltageReduction	Periods	Criteria	Results	Judgment
Voltage dip > 95%	0.5	B	A	PASS
Voltage dip 30%	25	C	A	PASS
Interruption > 95%	250	C	C	PASS

### Note:

- 1). N/A - denotes test is not applicable in this test report.
- 2) Criterion A: No observation of any performance degradation.
- 3) Criterion B: Some degradation of performance is observed but the equipment continues to operate as intended.
- 4) Criterion C: Loss of functionality, but self-recoverable by user, without loss of information or settings.



## 6. EUT TEST PHOTO

Radiated emissions up to 1 GHz

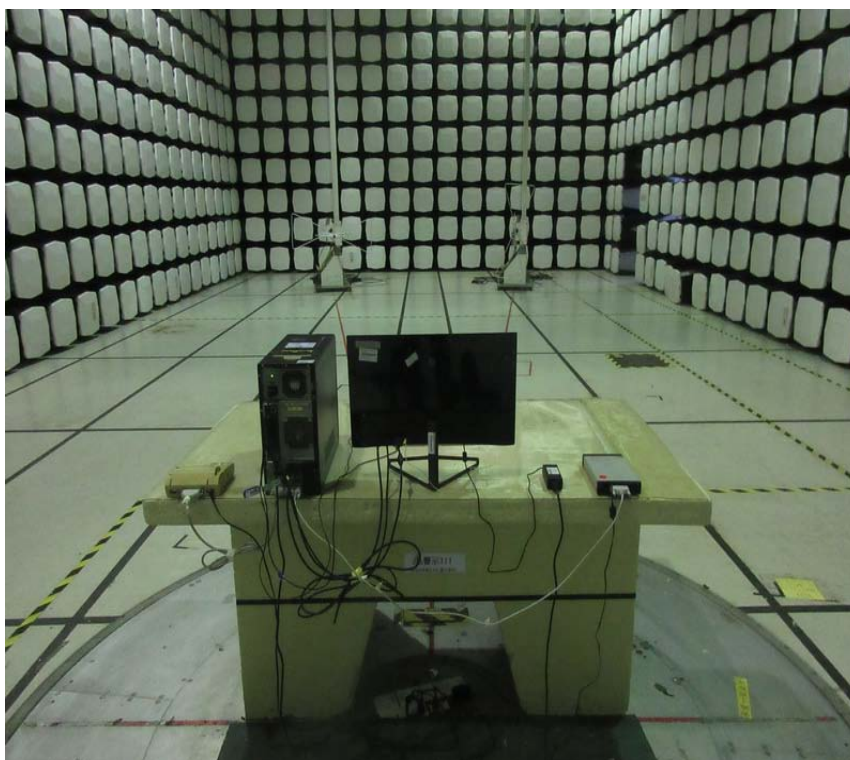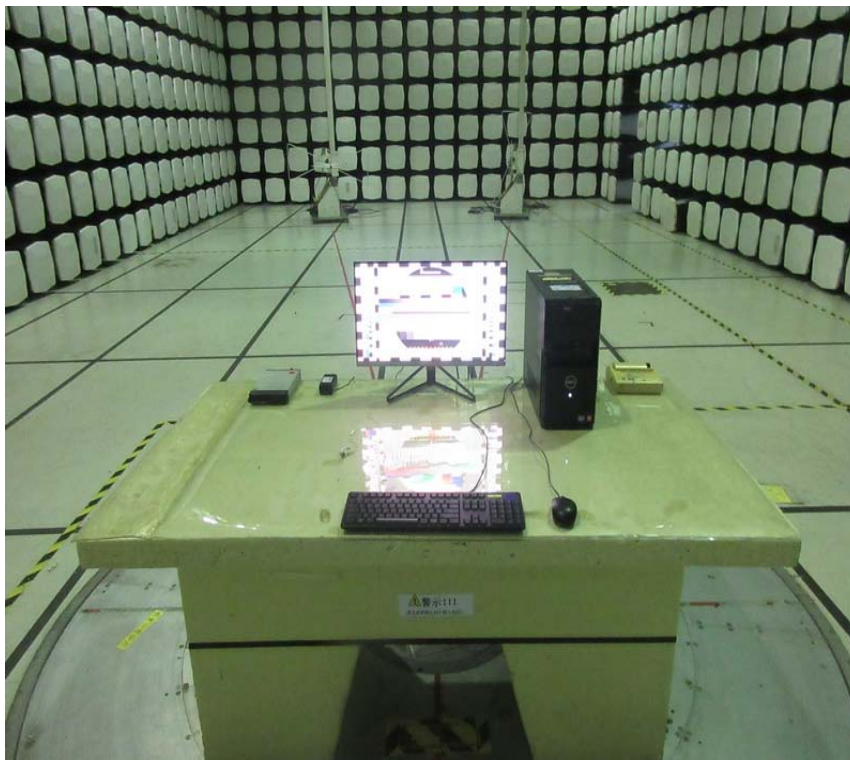




# Radiated emissions above 1 GHz

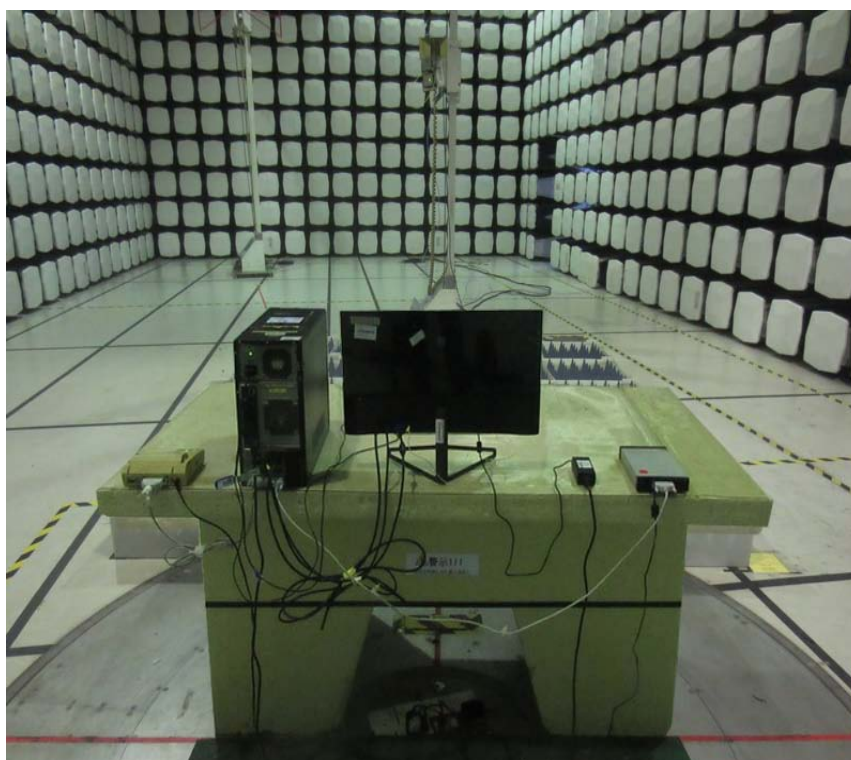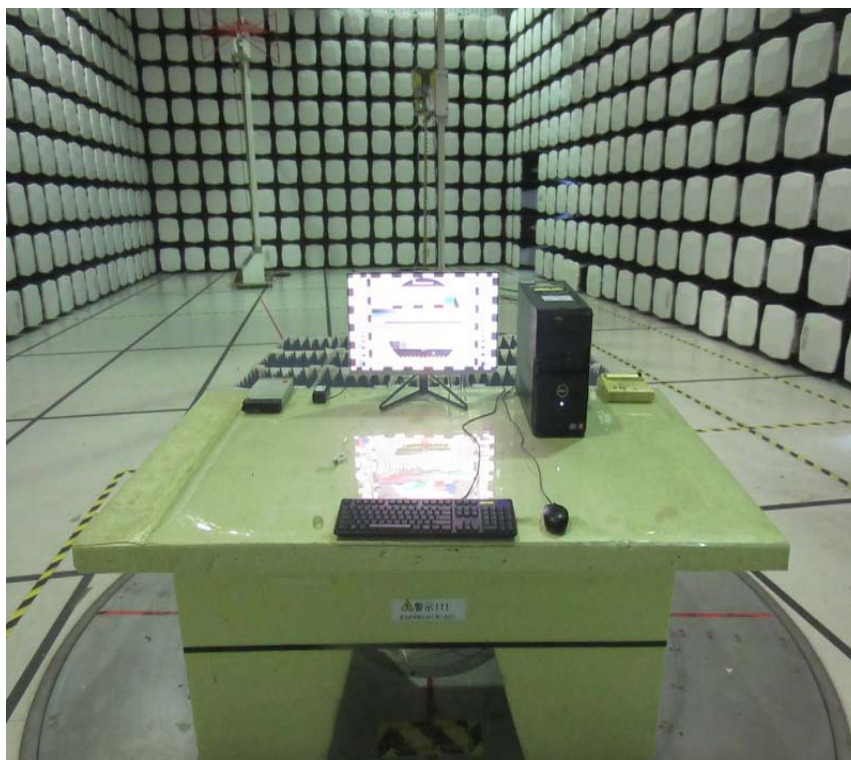




# Conducted emissions AC mains power port

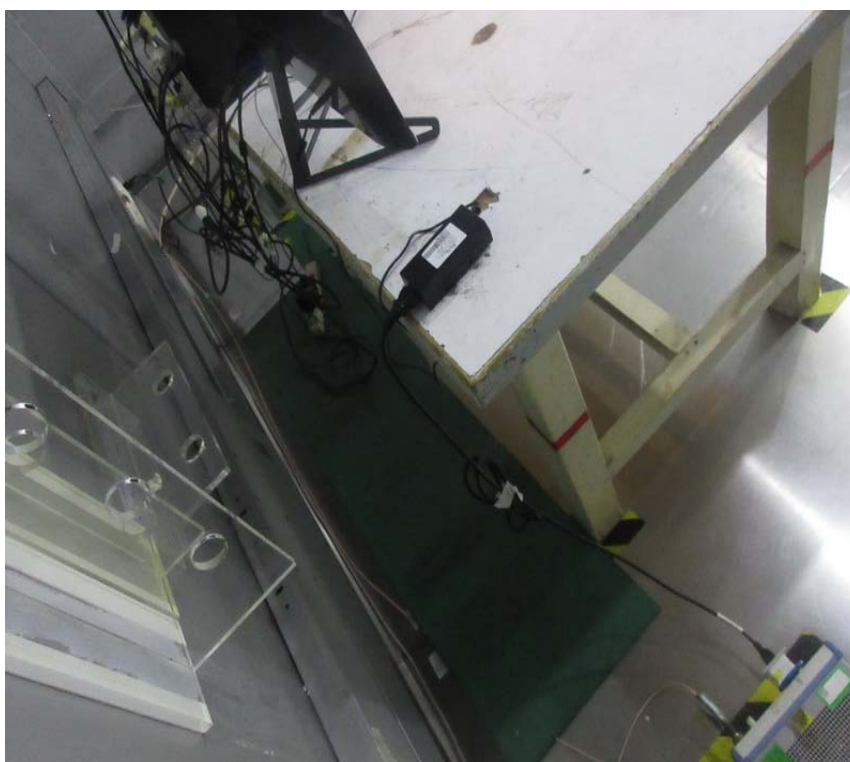

## Harmonic current emissions



## Voltage changes, voltage fluctuations and flicker

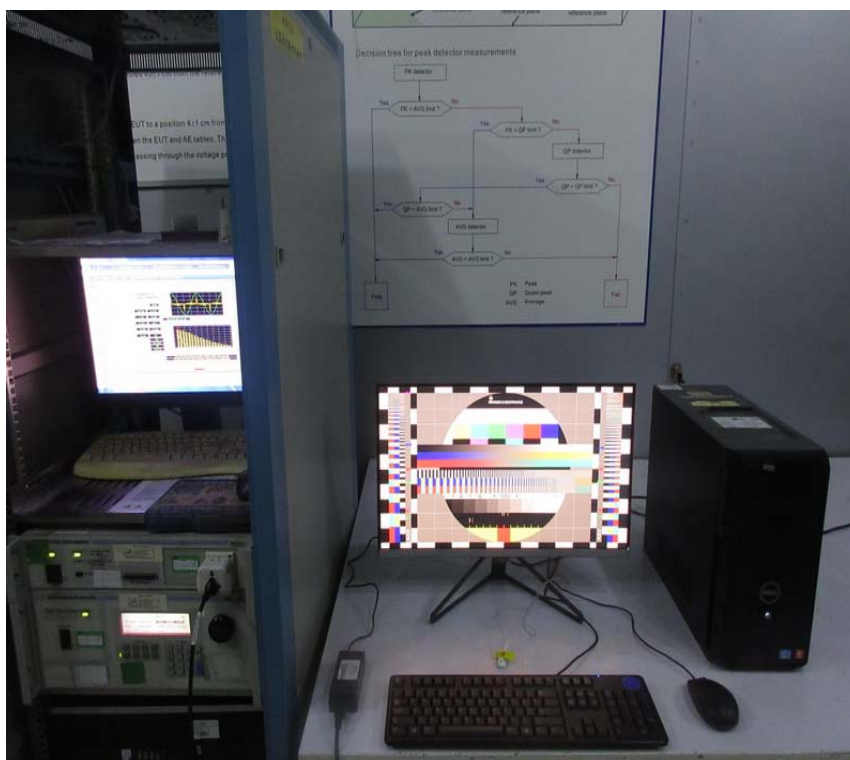

## Electrostatic discharge immunity




## Radiated, radio-frequency, electromagnetic field immunity






### Electrical fast transient/burst immunity

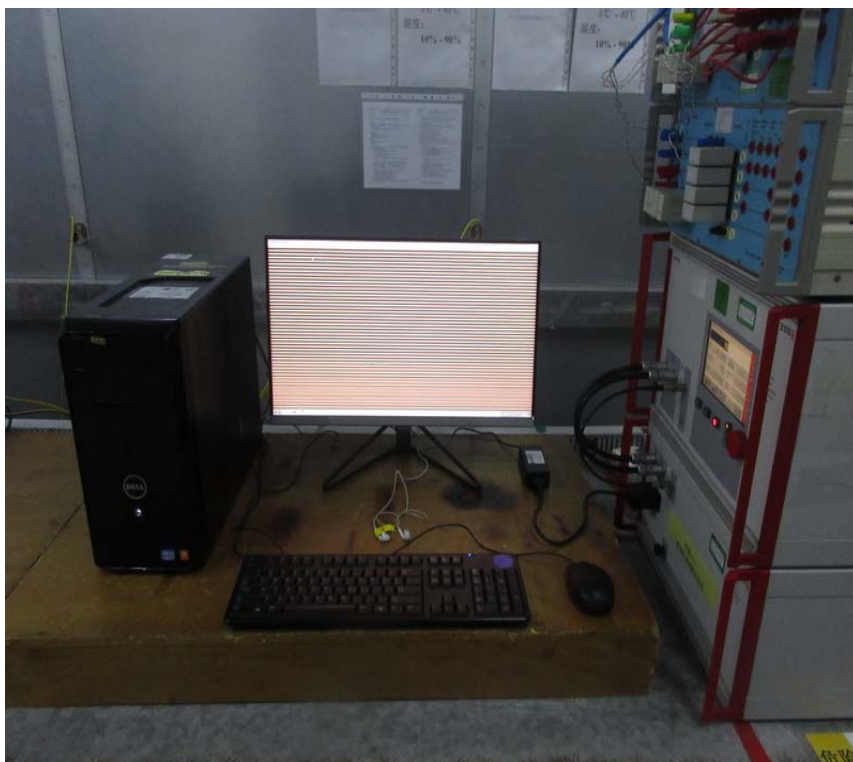


### Surge immunity

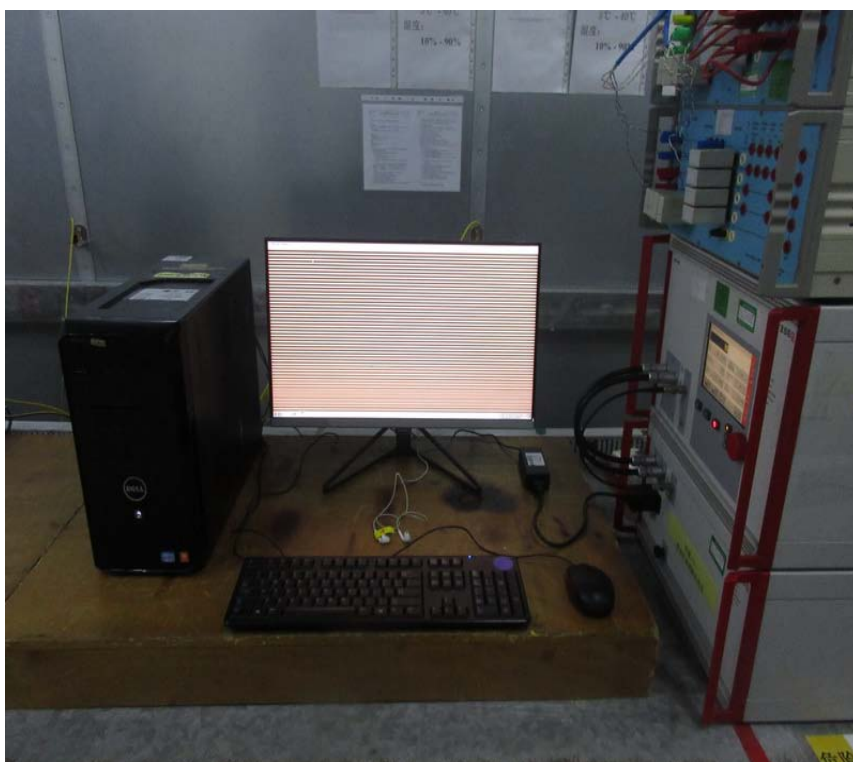

Immunity to conducted disturbances, induced by radio-frequency fields



Power frequency magnetic field immunity

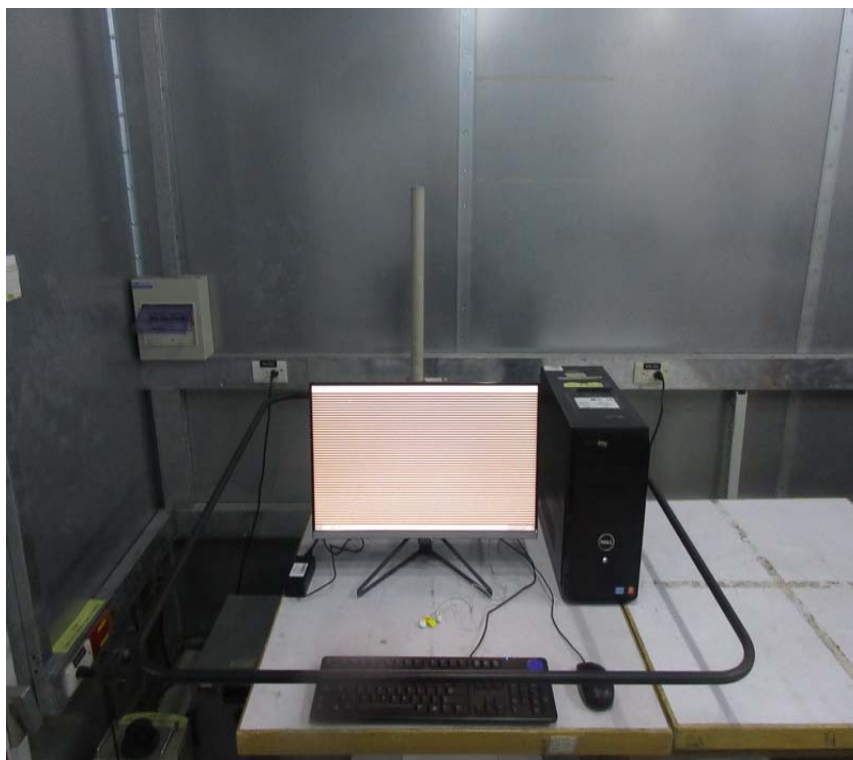

## Voltage dips, short interruptions and voltage variations immunity

