



LCD DISPLAY

**VA2732-H-2**


## Key Features

- SuperClear® IPS panel with Full HD 1080p resolution
- 100Hz Refresh rate delivers fluid visuals
- Variable Refresh Rate eliminates screen tearing and reduce stuttering
- 1ms (MPRT) response time for precision
- HDMI and VGA inputs for flexible connectivity



## Product Description

The ViewSonic VA2732-H-2 is a 27" Full HD IPS monitor featuring HDMI and VGA inputs for business and home use. The optimal screen performance and comfortable viewing without tearing or stuttering is delivered through variable refresh rate, Eye ProTech technology, and various ViewMode presets. Simply expand your workspace and experience truly seamless multitasking on just one screen with a VESA-compatible mount at a low power consumption.

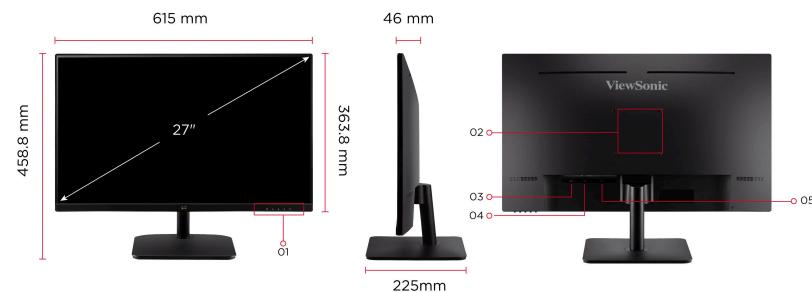

1. Menu Control Panel
2. VESA Compatible(Wall Mount 100 x 100 mm)
3. HDMI
4. VGA
5. Power In

**Visit Us**[www.viewsonic.com](http://www.viewsonic.com)

DISPLAY		OPERATING CONDITIONS	
Display Size (in.):	27	Temperature:	32°F to 104°F (0°C to 40°C)
Viewable Area (in.):	27	Humidity (non-condensing):	20% to 90%
Panel Type:	IPS Technology	WALL MOUNT	
Resolution:	1920 x 1080	VESA Compatible:	100 x 100 mm
Resolution Type:	FHD (Full HD)	INPUT SIGNAL	
Static Contrast Ratio:	1,300:1 (typ)	Frequency Horizontal:	RGB Analog: 24 ~ 86KHz, HDMI (v1.4): 24 ~ 115KHz
Dynamic Contrast Ratio:	50M:1	Frequency Vertical:	RGB Analog: 48 ~ 75Hz, HDMI (v1.4): 48 ~ 100Hz
Light Source:	LED	VIDEO INPUT	
Brightness:	250 cd/m² (typ)	Digital Sync:	TMDS - HDMI (v1.4)
Colors:	16.7M	Analog Sync:	Separate - RGB Analog
Color Space Support:	8 bit (6 bit + FRC)	ERGONOMICS	
Aspect Ratio:	16:9	Tilt (Forward/Back):	-3° / 20°
Response Time (MPRT):	1ms	WEIGHT (IMPERIAL)	
Viewing Angles:	178° horizontal, 178° vertical	Net (lbs):	9
Backlight Life (Hours):	30000 Hrs (Min)	Net Without Stand (lbs):	7.9
Curvature:	Flat	Gross (lbs):	13.2
Refresh Rate (Hz):	100	WEIGHT (METRIC)	
Variable Refresh Rate Technology:	Yes	Net (kg):	4.1
Low Blue Light:	Software solution	Net Without Stand (kg):	3.6
Flicker-Free:	Yes	Gross (kg):	6
Color Gamut:	NTSC: 72% size (Typ) sRGB: 104% size (Typ)	DIMENSIONS (IMPERIAL) (WXHxD)	
Pixel Size:	0.311 mm (H) x 0.311 mm (V)	Packaging (in.):	27.4 x 18.1 x 5.7
Surface Treatment:	Anti-Glare, Hard Coating (3H)	Physical (in.):	24.21 x 18.06 x 8.86
COMPATIBILITY		Physical Without Stand (in.):	24.21 x 14.32 x 1.81
PC Resolution (max):	1920x1080	DIMENSIONS (METRIC) (WXHxD)	
Mac® Resolution (max):	1920x1080	Packaging (mm):	695 x 460 x 145
PC Operating System:	Windows 10/11 certified; macOS tested	Physical (mm):	615 x 458.8 x 225
Mac® Resolution (min):	1920x1080	Physical Without Stand (mm):	615 x 363.8 x 46
CONNECTOR		GENERAL	
VGA:	1	Regulations:	CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, BSMI, TGM, RCM, GEMS, BIS
HDMI 1.4:	1	PACKAGE CONTENTS:	
Power in:	DC Socket (Center Positive)	VA2732-H-2 x1, HDMI Cable (v1.4; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1, Power plug x1 or 2 (by country)	
POWER		Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Eco Mode (Conserve):	13W	Warranty:	*Warranty offered may differ from market to market
Eco Mode (optimized):	17W		
Consumption (typical):	20W		
Consumption (max):	24W		
Voltage:	AC 100-240V		
Stand-by:	0.3W		
Power Supply:	External Power Adaptor		
ADDITIONAL HARDWARE			
Kensington Lock Slot:	1		
CONTROLS			
Physical Controls:	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)		
On Screen Display:	Input Select, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu		