




Key Features

- Quad-Core SoC with 4 GB RAM** delivers smooth, stable performance.
- Fast warm boot** launches signage and content in under seven seconds.
- USB playback with signal failover** ensures continuous content delivery.
- 4K UHD in any orientation** provides sharp, professional visuals.
- 500-nit brightness and 24/7 operation** support reliable round-the-clock signage.



Product Description

The ViewSonic CDE14-2C Series is a commercial-grade 4K display built for 24/7 operation in offices, retail spaces, transit hubs, and other high-demand environments. Powered by Android 14 (upgradeable to Android 16) and a quad-coreSoC with 4 GB RAM, it supports smooth multitasking and fast warm boot for immediate startup. With 500 nits ofbrightness and support for both landscape and portrait modes, it delivers sharp, high-impact visuals forpresentations and signage alike. Continuous USB media playback with automatic signal failover ensures uninterruptedcontent delivery, even when the primary source is lost. Designed for IT and AV professionals, the CDE14-2C Seriesintegrates seamlessly with leading ProAV control systems and ViewSonic Manager for streamlined deployment and remotemanagement. Whether deployed as a standalone unit or as part of a larger installation, it provides a dependablesolution for corporate and commercial environments.

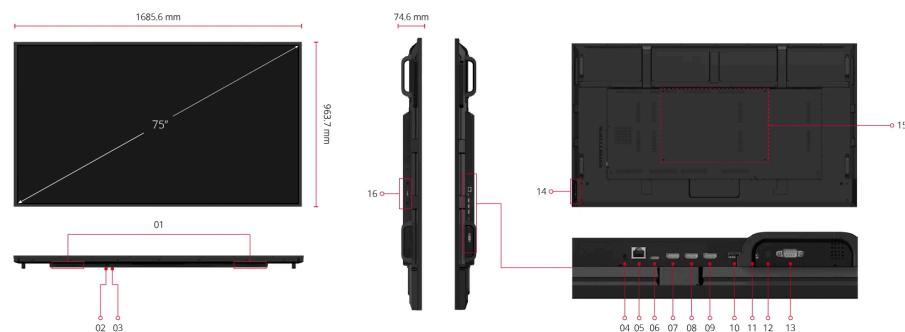

1. Speaker
2. Power Switch
3. AC IN
4. Audio Out
5. LAN
6. USB Type C
7. HDMI 1

8. HDMI 2
9. HDMI 3
10. USB
11. USB
12. SPDIF
13. RS232
14. Control Panel

15. VESA® Wall Mount (600x400mm)
16. WiFi Slot

Visit Us

www.viewsonic.com

DISPLAY		OPERATING CONDITIONS	
Panel Size:	75"	Temperature (° C):	0 to 40°C
Type/ Tech:	TFT LCD Module, DLED backlight	Humidity:	20% ~ 80% RH non-condensing
OPERATING HOURS		DIMENSIONS (W X H X D)	
Display Area (mm):	1650.24(H) x 928.26(V) 75" diagonal	24/7	Physical (inch / mm): 1685.6 x 963.7 x 68 mm
Native Resolution:	3840 x 2160	WEIGHT	
Aspect Ratio:	16:9	Net (lb / kg):	34.15kg
Colors:	8bit+FRC	Gross (lb / kg):	48.44kg
Brightness:	500 nits (typ.)	REGULATIONS	
Contrast Ratio:	1500:1 (typ.) / 2000:1 (DCR enabled)	cTUVus, FCC/ICES003, Energy star 8, EPEAT Silver, EEI, EMC/CE Report, CB, EAC, UkrSEPRO, RCM, Green BOM, RoHS DoC, ErP-Eco, REACH DoC, SCIP, WEEE report, Annex I, Annex II, TPCH DoC, Packing waste, CA65 DoC	
Response Time:	11ms	PACKAGE CONTENTS	
Viewing Angles:	H = 178, V = 178 typ.	1. 3M power cord 2. Remote control 3. AAA battery x 2 4. Quick Start Guide 5. RS232 adapter 6. Wall mount Screw x 4 7. HDMI cable 3 M(HDMI LA certified) 8. Compliance statement	
Backlight Life:	50,000 Hours	PLATFORM	
Surface Treatment:	Hardness: 3H, Anti-glare coating, Haze 25%	Processor:	Quad-core ARM Cortex-A73
Bezel:	15.9/15.9/15.9/15.9 mm (L/R/T/B)	RAM:	4GB DDR4
Orientation:	Landscape & Portrait	Storage:	32GB
INPUT			
HDMI:	x3 (HDMI 2.1 4K@60Hz*3, HDMI 3 supports ARC)	RS-232:	x 1
WiFi Slot:	x 1	OUTPUT	
Audio:	3.5mm x1	SPDIF:	x 1
LAN			
RJ45:	x1 (10/100M for USB Type-C)	USB	
Type A:	USB2.0 x 2	Type C:	x1 (DP 1.2, USB 2.0, 15W PD, Ethernet sharing, Smart USB)
SPEAKERS			
10W x 2			
COMPATIBILITY			
HDMI:	3840X2160 @60Hz		
EMBEDDED OS			
Android 14 AOSP			
BUNDLED SOFTWARE			
Wireless Presentation:	AirSync	Device Management:	Manager
ViewSonic Launcher:	Yes		
POWER			
Voltage:	100-240 VAC +/- 10%	Consumption:	93.89W with Energy Star
ERGONOMICS			
Wall Mount (VESA®):	600x400 mm		