





## Key Features

- Quad-Core SoC with 4 GB RAM** delivers smooth, stable performance.
- Fast warm boot** launches signage and content in under seven seconds.
- USB playback with signal failover** ensures continuous content delivery.
- 4K UHD in any orientation** provides sharp, professional visuals.
- 500-nit brightness and 24/7 operation** support reliable round-the-clock signage.

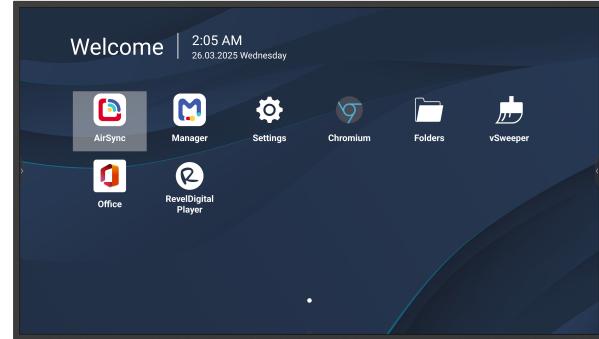

## Product Description

The ViewSonic CDE14-2C Series is a commercial-grade 4K display built for 24/7 operation in offices, retail spaces, transit hubs, and other high-demand environments. Powered by Android 14 (upgradeable to Android 16) and a quad-coreSoC with 4 GB RAM, it supports smooth multitasking and fast warm boot for immediate startup. With 500 nits of brightness and support for both landscape and portrait modes, it delivers sharp, high-impact visuals for presentations and signage alike. Continuous USB media playback with automatic signal failover ensures uninterruptedcontent delivery, even when the primary source is lost. Designed for IT and AV professionals, the CDE14-2C Seriesintegrates seamlessly with leading ProAV control systems and ViewSonic Manager for streamlined deployment and remotemanagement. Whether deployed as a standalone unit or as part of a larger installation, it provides a dependablesolution for corporate and commercial environments.

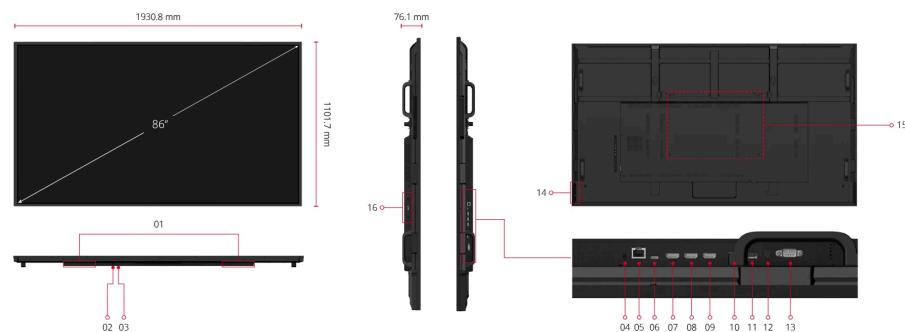

1. Speaker
2. Power Switch
3. AC IN
4. Audio Out
5. LAN
6. USB Type C
7. HDMI 1

8. HDMI 2
9. HDMI 3
10. USB
11. USB
12. SPDIF
13. RS232
14. Control Panel

15. VESA® Wall Mount (600x400mm)
16. WiFi Slot

<b>DISPLAY</b>		<b>OPERATING CONDITIONS</b>	
Panel Size:	86"	Temperature (° C):	0 to 40°C
Type/ Tech:	TFT LCD Module, DLED backlight	Humidity:	20% ~ 80% RH non-condensing
<b>OPERATING HOURS</b>		<b>DIMENSIONS (W X H X D)</b>	
Display Area (mm):	1895.04(H) x 1065.96(V) 86" diagonal	Physical (inch / mm):	1930.8 x 1101.7 x 68 mm
Native Resolution:	3840 x 2160	<b>WEIGHT</b>	
Aspect Ratio:	16:9	Net (lb / kg):	42kg
Colors:	8bit+FRC	Gross (lb / kg):	56.95kg
Brightness:	500 nits (typ.)	<b>REGULATIONS</b>	
Contrast Ratio:	1200:1 (typ.) / 2000:1 (DCR enabled)	cTUVus, FCC/ICES003, Energy star 8, EPEAT Silver, EEI, EMC/CE Report, CB, EAC, UkrSEPRO, RCM, Green BOM, RoHS DoC, ErP-Eco, REACH DoC, SCIP, WEEE report, Annex I, Annex II, TPCH DoC, Packing waste, CA65 DoC	
Response Time:	8ms	<b>PACKAGE CONTENTS</b>	
Viewing Angles:	H = 178, V = 178 typ.	1. 3M power cord 2. Remote control 3. AAA battery x 2 4. Quick Start Guide 5. RS232 adapter 6. Wall mount Screw x 4 7. HDMI cable 3 M(HDMI LA certified) 8. Compliance statement	
Backlight Life:	50,000 Hours	<b>PLATFORM</b>	
Surface Treatment:	Hardness: 3H, Anti-glare coating, Haze 25%	Processor:	Quad-core ARM Cortex-A73
Bezel:	15.9/15.9/15.9/15.9 mm (L/R/T/B)	RAM:	4GB DDR4
Orientation:	Landscape & Portrait	Storage:	32GB
<b>INPUT</b>			
HDMI:	x3 (HDMI 2.1 4K@60Hz*3, HDMI 3 supports ARC)	RS-232:	x 1
WiFi Slot:	x 1	<b>OUTPUT</b>	
Audio:	3.5mm x1	RS232:	x 1
RJ45:	x1 (10/100M for USB Type-C)	<b>LAN</b>	
<b>USB</b>			
Type A:	USB2.0 x 2	Type C:	x1 (DP 1.2, USB 2.0, 15W PD, Ethernet sharing, Smart USB)
<b>SPEAKERS</b>			
10W x 2			
<b>COMPATIBILITY</b>			
HDMI:	3840X2160 @60Hz		
<b>EMBEDDED OS</b>			
Android 14 AOSP			
<b>BUNDLED SOFTWARE</b>			
Wireless Presentation:	AirSync	Device Management:	Manager
ViewSonic Launcher:	Yes		
<b>POWER</b>			
Voltage:	100-240 VAC +/- 10%	Consumption:	120.95W with Energy Star
<b>ERGONOMICS</b>			
Wall Mount (VESA® ):	600x400 mm		