
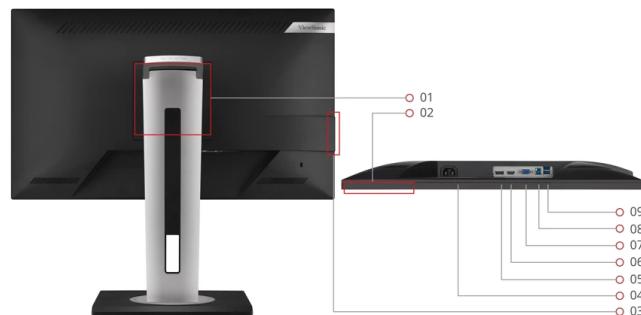


Key Features

- Advanced ergonomics with a 40° tilt, 130mm height adjustment, ±60°swivel, and ±90°pivot
- Flexible connectivity with DisplayPort, HDMI, VGA, and USB 3.2
- TCO & Energy Star & EPEAT certificated
- Versatile stand design for mounting a mini-PC or cloud client

**Product Description**

ViewSonic VG2748a-2 is a 27" Full HD monitor with productivity-enhancing features including IPS technology and an advanced ergonomic design for the modern-day office. Utilising SuperClear® IPS panel technology and 1080P resolution, VG2748a-2 delivers a crisp, clear image from any viewing angle. An advanced ergonomic design offers the widest range of customisable adjustments currently available to provide maximum comfort, including pivot, swivel, height adjustment, and an impressive 40° tilt, which enables you to use the monitor while standing and to have strategic group discussions around the screen. VG2748a-2 uses environmentally friendly packaging and offers a quick and easy out-of-the-box set-up via the quick release stand. The cloud client mounts on the back of the monitor stand coupled with cable management design features make VG2748a-2 perfect for deployment in cloud-based environments. Versatile connectivity options include HDMI, DisplayPort, VGA, and USB 3.2 inputs.

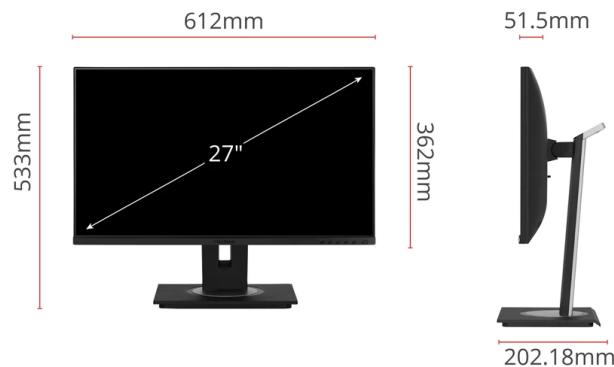

1. VESA Compatible(Wall Mount 100 x 100mm)
2. Menu Control Panel
3. USB 3.2 down stream x2
4. AC In
5. DisplayPort
6. HDMI

7. VGA
8. USB 3.2 up stream
9. USB 3.2 down stream

Visit Us ■ www.viewsonic.com

DISPLAY		WALL MOUNT	
Display Size (in.):	27	VESA Compatible:	100 x 100 mm
Viewable Area (in.):	27		
Panel Type:	IPS Technology		
Resolution:	1920 x 1080		
Resolution Type:	FHD		
Static Contrast Ratio:	1,000:1 (typ)		
Dynamic Contrast Ratio:	50M:1		
Light Source:	LED		
Brightness:	250 cd/m ² (typ)		
Colours:	16.7M		
Colour Space Support:	8 bit (6 bit + A-FRC)		
Aspect Ratio:	16:9		
Response Time (Typical GTG):	5ms		
Response Time (GTG w/OD):	5ms		
Viewing Angles:	178° horizontal, 178° vertical		
Backlight Life (Hours):	30000 Hrs (Min)		
Curvature:	Flat		
Refresh Rate (Hz):	60		
Blue Light Filter:	Yes		
Flicker-Free:	Yes		
Colour Gamut:	NTSC: 72% size (Typ)sRGB: 102% size (Typ)		
Pixel Size:	0.311 mm (H) x 0.311 mm (V)		
Surface Treatment:	Anti-Glare, Hard Coating (3H)		
COMPATIBILITY		WEIGHT (IMPERIAL)	
PC Resolution (max):	1920x1080	Net (lbs):	15.5
Mac® Resolution (max):	1920x1080	Net Without Stand (lbs):	10
PC Operating System:	Windows 10/11 certified; macOS tested	Gross (lbs):	22.2
Mac® Resolution (min):	1920x1080	WEIGHT (METRIC)	
CONNECTOR		Net (kg):	7
VGA:	1	Net Without Stand (kg):	4.6
USB 3.2 Type A Down Stream:	4	Gross (kg):	10.1
USB 3.2 Type B Up Stream:	1	DIMENSIONS (IMPERIAL) (WXHxD)	
HDMI 1.4:	1	Packaging (in.):	27.2 x 16.9 x 8.6
DisplayPort:	1	Physical (in.):	24.1 x 15.79~20.99 x 8
Power in:	3-pin Socket (IEC C14 / CEE22)	Physical Without Stand (in.):	24.1 x 14.2 x 2
AUDIO		DIMENSIONS (METRIC) (WXHxD)	
Internal Speakers:	2Watts x2	Packaging (mm):	692 x 430 x 218
POWER		Physical (mm):	612 x 401.19~533.24 x 202
Eco Mode (Conserve):	16.2W	Physical Without Stand (mm):	612 x 362 x 52
Eco Mode (optimised):	19.2W	GENERAL	
Consumption (typical):	23W	Regulations:	Energy Star, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, TCO 9.0, EAC, UkrSEPRO, UKCA
Consumption (max):	25W	PACKAGE CONTENTS:	VG2748A-2 x1, 3-pin Plug (IEC C13 / CEE22) x1, DisplayPort Cable (v1.2; Male-Male) x1, USB A/B Cable (v3.2; Male-Male) x1, Quick Start Guide x1
Voltage:	AC 100-240V	Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Stand-by:	0.5W	Warranty:	*Warranty offered may differ from market to market
Power Supply:	Internal Power Supply	Power Management:	Energy Star standards
ADDITIONAL HARDWARE			
Kensington Lock Slot:	1		
Cable Organisation:	Yes		
CONTROLS			
Physical Controls:	Key 1 (eye), Key 2, Key 3, Key 4, Key 5, Key 6 (power)		
On Screen Display:	Input Select, Audio Adjust, ViewMode, Colour Adjust, Manual Image Adjust, Setup Menu		
OPERATING CONDITIONS			
Temperature:	32°F to 104°F (0°C to 40°C)		
Humidity (non-condensing):	20% to 90%		