





Key Features

- **Fast Warm Boot** eliminates long startup delays, launching signage and content in under 7 seconds.
- **Native 4K UHD in Any Orientation** delivers sharp, high-resolution visuals in landscape or portrait.
- **USB media playback & scheduling with automatic failover** ensures uninterrupted signage
- **Commercial-Grade Brightness & 24/7 Reliability** keep content clear and visible around the clock.
- **Centralized control** with Pro-AV integration and remote management via Web UI and ViewSonic Manager.

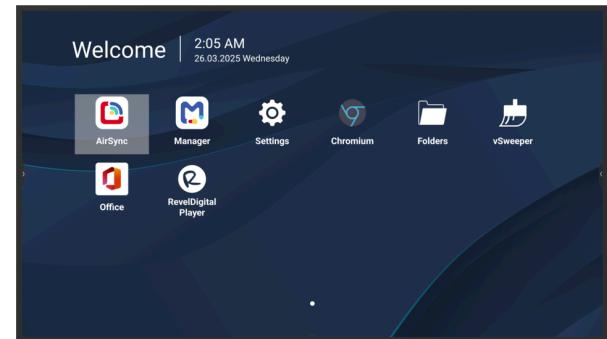

Product Description

The ViewSonic CDE31 Series is a turnkey, commercial-grade digital display that delivers impactful communication across corporate, retail, education, and healthcare environments. With native 4K Ultra HD resolution and reliable 24/7 operation, it delivers sharp, consistent visuals in both landscape and portrait orientations—ideal for digital signage and meeting spaces. Powered by Android 14 OS and a next-generation Quad-Core SoC with 8GB RAM, the CDE31 Series ensures smooth playback and responsive performance for continuous content delivery. The platform is upgradeable to Android 16, supporting ongoing security updates and long-term compatibility. For streamlined deployment and management, it offers seamless ProAV integration with leading control systems, dual 16W built-in speakers, 3.5 mm audio in/out. It also supports static IP configuration, a simplified web-based UI, and centralized remote control via ViewSonic Manager.

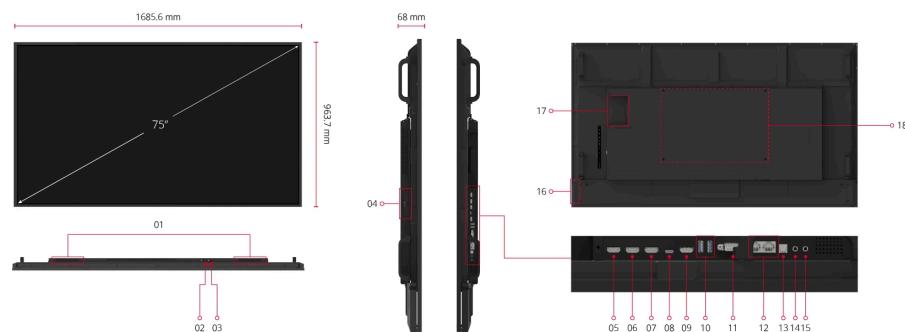

1. Speaker	8. USB Type-C	15. Audio Out
2. AC IN	9. HDMI Out	16. Control Panel
3. Power Switch	10. USB2.0 x1, USB3.2 Gen x1	17. OPS Slot
4. WiFi Slot	11. RS232	18. VESA® Wall Mount (600x400mm)
5. HDMI 1	12. LAN	
6. HDMI 2	13. SPDIF	
7. HDMI 3	14. Audio In	

DISPLAY		ERGONOMICS	
Panel Size:	75"	Wall Mount (VESA®):	600x400 mm
Type/ Tech:	TFT LCD module with DLED backlight	OPERATING CONDITIONS	
Display Area (mm):	1650.24(H) x 928.26(V) 74.6" diagonal	Temperature (° C):	0 to 40°C
Native Resolution:	3840x2160	Humidity:	20%-80% RH
Aspect Ratio:	16:9	OPERATING HOURS	24/7
Colors:	8bit+2bitFRC	DIMENSIONS (W X H X D)	
Brightness:	500 nits	Physical (inch / mm):	66.36 x 37.94 x 2.68 in/ 1685.6 x 963.7 x 68 mm
Contrast Ratio:	1200:1 (typ.) / 5000:1 (DCR enabled)	Packaging (inch / mm):	73.35 x 42.91 x 8.86 in/ 1863 x 1090 x 225 mm
Response Time:	6.5ms	WEIGHT	
Viewing Angles:	H = 178, V = 178 typ.	Net (lb / kg):	75.29lb / 34.15kg
Backlight Life:	50,000 Hours	Gross (lb / kg):	106.79lb / 48.44kg
Surface Treatment:	Anti-Glaire, 3H hardness, Haze 25%	REGULATIONS	
Bezel:	15.9mm/15.9mm/15.9mm/15.9mm (L/R/T/B)	cTUVus, FCC/ICES003, Energy star 8, EPEAT Gold, EEI, EMC/CE Report, CB, EAC, UkrSEPRO, RCM, Green BOM, RoHS DoC, ErP-Eco, REACH DoC, SCIP, WEEE report, Annex I, Annex II, TPCH DoC, Packing waste, CA65 DoC	
Orientation:	Landscape & Portrait	ENERGY STAR	ES8.0
PLATFORM		EEI RATING	F
Processor:	Quad-core ARM Cortex-A73	PACKAGE CONTENTS	
RAM:	8GB DDR4	1. 3m power cord by ship area 2. Remote control 3. AAA battery x 2 4. Quick Start Guide 5. RS232 adapter 6. Clamp x 5 7. wall mount Screw x 4 8. HDMI cable 3m(HDMI LA certified) 9. Compliance statement	
Storage:	32GB	INPUT	
HDMI:	x3 (HDMI 2.0*3, HDMI1 support ARC)	HDMI: x3 (HDMI 2.0*3, HDMI1 support ARC)	
Audio:	3.5mm X 1	Audio: 3.5mm X 1	
RS-232:	x 1	RS-232: x 1	
OPS Slot:	OPS slot x1	OPS Slot: OPS slot x1	
WiFi Slot:	WIFI slot x1	WiFi Slot: WIFI slot x1	
OUTPUT		OUTPUT	
HDMI:	x 1	HDMI: x 1	
Audio:	3.5mm x1 (Line out)	Audio: 3.5mm x1 (Line out)	
SPDIF:	x 1	SPDIF: x 1	
LAN		LAN	
RJ45:	x2 (*1 LAN-in & *1 LAN-out) 10/100M for USB TypeC, 1000M for OPS	RJ45: x2 (*1 LAN-in & *1 LAN-out) 10/100M for USB TypeC, 1000M for OPS	
USB		USB	
Type A:	x2 (USB2.0 x1, USB3.2 Gen1 x1)	Type A: x2 (USB2.0 x1, USB3.2 Gen1 x1)	
Type C:	x1 (PD65W/15W with OPS + DP1.2 + Data USB2.0 + 10M/100M sharing)	Type C: x1 (PD65W/15W with OPS + DP1.2 + Data USB2.0 + 10M/100M sharing)	
SPEAKERS		SPEAKERS	
16W x 2		16W x 2	
COMPATIBILITY		COMPATIBILITY	
HDMI:	3840X2160 @60Hz	HDMI: 3840X2160 @60Hz	
EMBEDDED OS		EMBEDDED OS	
Android 14 AOSP		Android 14 AOSP	
BUNDLED SOFTWARE		BUNDLED SOFTWARE	
Wireless Presentation:	AirSync	Wireless Presentation: AirSync	
Device Management:	Manager	Device Management: Manager	
POWER		POWER	
Voltage:	100-240 VAC +/- 10%	Voltage: 100-240 VAC +/- 10%	
Consumption:	89.19W with Energy Star	Consumption: 89.19W with Energy Star	