




## EV2795-WT

### Your advantages




Thanks to its USB-C ports and USB-C daisy chain functionality, the EV2795 ensures that there are fewer cables and more freedom on the desk. Its virtually frameless design also makes it shine. This impressive monitor boasts unparalleled image quality, ergonomics and a range of modern connection options, meaning it is perfectly suited to satisfy your requirements for the office and for at home. Laptop and tablet users will be impressed by the monitor's fully functional docking station, which includes a LAN connection and charging port for the computer. Dual-screen systems can be set up easily using USB-C daisy chain. The two USB upstream ports allow the EV2795 to be used as a keyboard/mouse switch. For example, if both a private PC and company computer are connected to the monitor in your home office, both computers can be operated with a single keyboard and mouse and with any other chained monitors.

- ✓ 27-inch monitor with 2560 x 1440 pixels and fine resolution of 109 ppi
- ✓ Docking functionality for tablets, laptops and smartphones thanks to USB 3.1 Type-C connectivity supplying a DisplayPort signal, LAN and power charging of 70 watts (max.)
- ✓ Bezel only 1 mm: amazingly compact and ultra-sleek design
- ✓ 1000:1 contrast ratio, brightness: 350 cd/m<sup>2</sup>, 178° viewing angle
- ✓ Auto EcoView, EcoView Index and EcoView Optimizer for maximum power savings and superb ergonomics
- ✓ USB-C daisy chain functionality (USB-C output) for connecting another monitor
- ✓ Signal inputs: USB-C (Display Port Alt Mode), Display Port, HDMI
- ✓ Production that is proven to be environmentally friendly and socially responsible

## Features

### Cutting-edge connectivity with USB-C

Video and audio reproduction, rapid data transfer, including network signal and power supply for connected devices – all this and so much more is possible with a single USB-C cable. The EV2795-WT will become your central docking station to which you can quickly and easily connect your laptop. This is especially practical if you have multiple workstations or switch between working in an office and at home. The 70-watt power supply via USB-C reliably charges small computers or laptops, giving you more desk space since an additional power supply is no longer necessary for the computer.

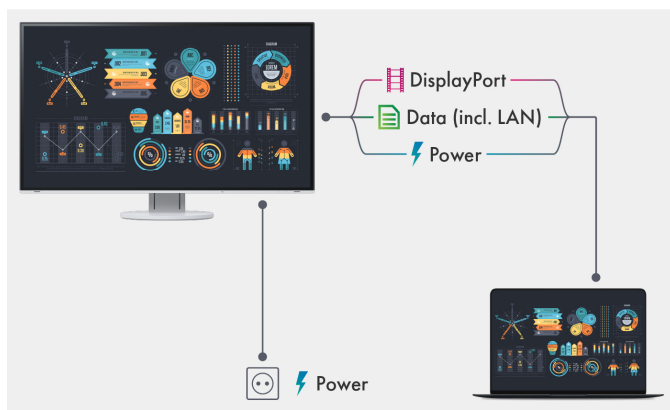

### Efficient multi-display solution

The monitor's USB-C ports enable multiple monitors to be connected to the computer via a single cable (using the daisy chain method). This allows for a hassle-free configuration of up to two screens and reduces cable clutter. Being able to view and edit several applications simultaneously also improves comfort and increases efficiency when working.



Daisy chain method  
Tidied-up cables



Conventional solution  
Messy cabling

### Information on daisy chain compatibility


Are you unsure whether the daisy chain method is compatible with your system? EIZO tests PCs that are currently available on the market to ensure that they are compatible with the daisy chain method and FlexScan monitors.

1. Find out more about compatibility tests for the EV2795 (link to the international EIZO website)

2. How to set up a daisy chain connection (link to the international EIZO website)


### One monitor, many ports

The EV2795-WT is equipped with one USB-C port and three USB-A downstream ports for connecting various peripheral devices without needing a USB hub. This is useful, for example, if your laptop only has a limited number of USB ports or you want to optimise the set-up of workstations for hot desking or in a home office environment. The monitor also has USB-C, HDMI and Display Port video inputs for total connection flexibility.

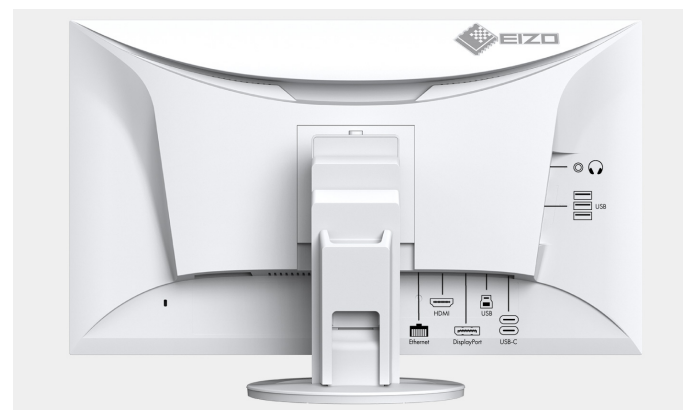

### LAN port to ensure a stable network connection

The monitor has a dedicated LAN port to ensure a stable wired network connection. Laptops and PCs require only one USB-C cable to be connected to the EV2795-WT to gain network access via the monitor. This is particularly advantageous for laptops that do not have a LAN connection and allows for fast and stable data transfer, which is required for video conferences, for example.

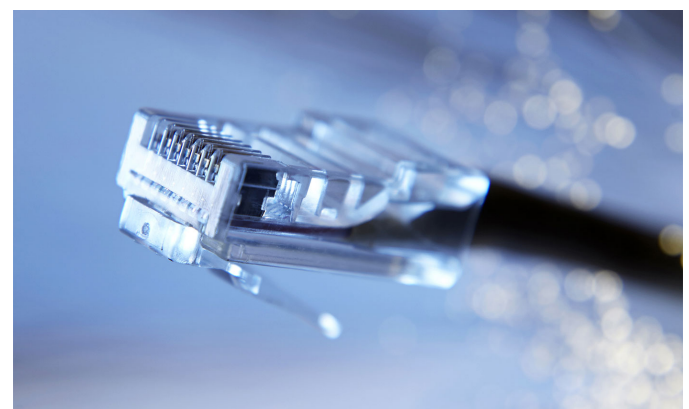

### Image quality


## Features

### KVM switch: two PCs, one user


It has never been easier to use two PCs simultaneously. The EV2795-WT has an integrated KVM (Keyboard Video Mouse) switch for both its USB upstream ports and can be used as a keyboard/mouse switch. For example, a single monitor or even multiple chained monitors can be shared between a private and a company computer when working from home. This ensures that work is uninterrupted and makes for a tidy work area.

### Precise colour control

An image can only be perfect if the colours are, too. This is why EIZO office monitors have a 10-bit look-up table at a minimum, which allows the colour information to be assigned much more precisely than with conventional 8-bit LUTs. The finest colour gradations ensure that gradients are always perfectly displayed, while also offering customised adjustment options. For example, you can adjust the white balance from 4000 K to 10000 K in 500-K intervals.



Look-Up-Table with 10 and more bit



Look-Up-Table with 8 bit

### Overdrive to quickly change images

Fast, faster, overdrive. The overdrive function accelerates switching time so that the grey-grey change takes only 5 ms on average. You can watch films and rapidly changing images without annoying afterglow.



Without overdrive: streaking and time delay

### Elegant design

The monitor's appearance can be the key to creating a pleasant working atmosphere. Whether you are at home or in the office, the monitor's minimalistic, virtually frameless design and ergonomic functionality allows it to fit naturally into your workplace environment. The housing is available in both an elegant black and in white, with matching white cables.




### Save electricity and your eyes with Auto EcoView

At day, at night, bright, dark: No matter when and how you work, the Auto EcoView function continuously measures changes of the ambient light and optimises the monitor with ideal brightness values fully automatically by using a sensor. The benefits: Annoying glare is reduced, your eyes will not get tired as quickly. A special two-point control takes into account the brightest and darkest environment over the course of the day with the respectively desired screen brightness. Another advantage: Thanks to the automatic brightness adjustment, you will save up to 50% of your electricity costs in comparison to a monitor that is permanently operated at maximum brightness.

Of course, you can also continue to configure the monitor manually. EcoView Index is used for orientation on how environmentally friendly and economical your settings are.



During the day




In the evening

## Features

### Controls integrated into bezel

Electrostatic switches are integrated into the front of the EV2795-WT instead of mechanical buttons. This ensures ease of use while also giving the monitor an extremely elegant look. The speakers and all the controls are also built into the bezel, pointing forward in the direction of the user. They are fully integrated into the monitor's flat, nearly frameless design to offer an excellent user experience.

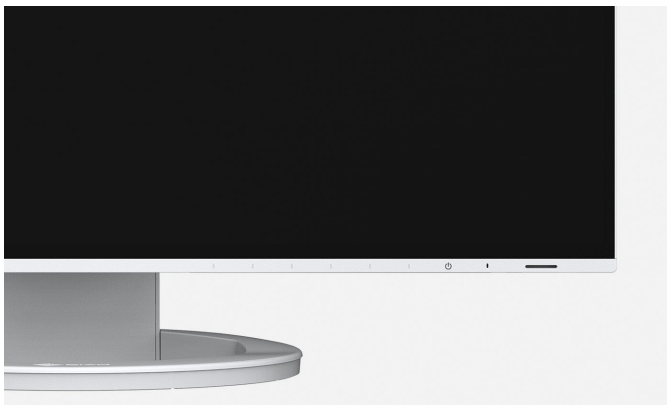


### Flicker free: for the sake of the eyes

To help protect your eyes, EIZO has developed a hybrid technology to control the backlight. This combines the benefits of the otherwise standard PWM (pulse width modulation) and DC (direct current) control. The PWM control uses much higher frequencies than standard PWM methods. The result: a flicker-free viewing experience. Flickering is reduced down to absolute freedom from flickering, without impairing image quality or colour stability. In addition, the brightness can be set to less than 1% of the maximum value in darkly lit rooms. The benefit: Your screen remains free from glare even under these conditions.


### Anti-glare coating: more image, less reflection

The EV2795-WT offers a perfect, non-glare surface. By minimising glare by diffusing the reflected light, the EV2795-WT effectively protects your eyes from straining. This keeps your eyes from getting as tired and allows you to sit comfortably in front of the screen, without having to sit in a forced position to prevent glare.

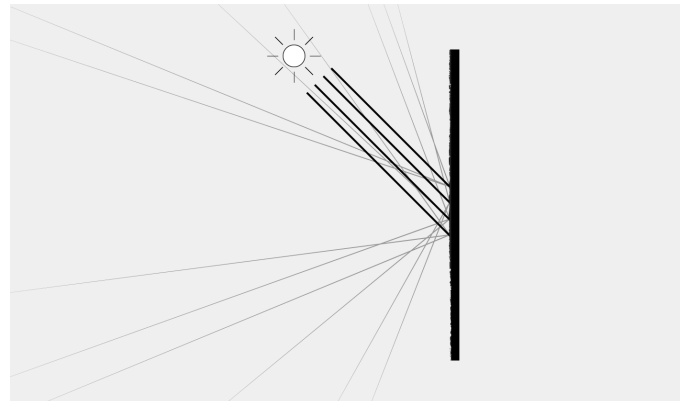


### Flexible base


Ergonomic and stable: the adjustable stand focuses on ergonomics. You can rotate, swivel and tilt the monitor stand until you find the most comfortable setting for your back, neck and sitting posture. It features continuous height adjustment and can be lowered almost to the base plate of the stand, enabling you to position the top image line ergonomically right below your eye level.




Height  
176,6 mm



Tilt  
Tilt down 5°, tilt up 35°



Swivel  
344°



Rotation  
Rotation 90° (clockwise and anti-clockwise)°

## Features


### Less blue light

The blue light emitted by some monitors' LED backlighting can be detrimental to workspace ergonomics. When editing documents, paper mode simulates reading on actual paper by using the appropriate settings for contrast, brightness and colour temperature. This reduces the amount of blue light. When used in combination with the Auto EcoView brightness settings, blue light is reduced by a total of up to 80%.




### Preset colour modes: Optimised display at the press of a button

Preset colour modes make it easier for you to work and view images, texts and videos. Because when choosing colour settings, it makes a difference whether you are looking at a film, editing an image, surfing the Internet or writing texts. You can configure the respective default settings for brightness, gamma correction and colour temperature at the press of a button. For example, paper mode simulates the pleasant contrast of books by reducing the blue light portion and brightness. This reduces wear on your eyes when reading documents and prevents tiredness.

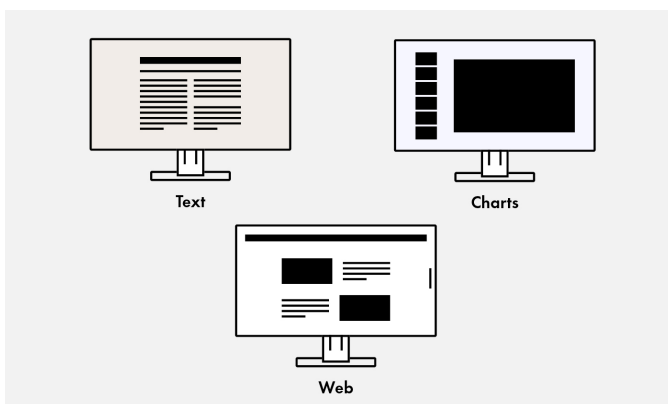


### Operation made easy thanks to the Button Guide

The Button Guide provides all functions at a glance. Touching the button is enough and the screen will show all functions and the corresponding control panel.

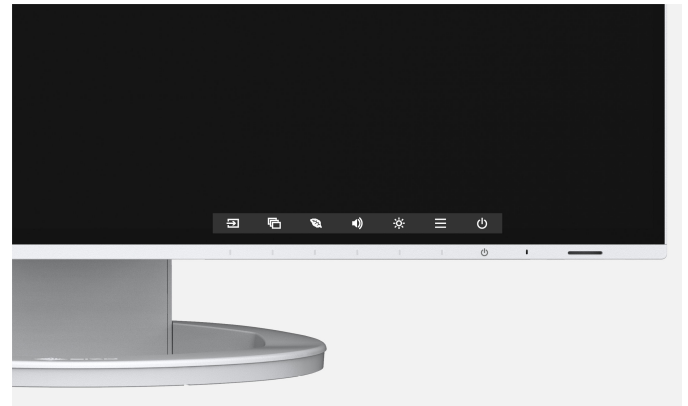

### Monitor Configurator for cross-network settings

Reduced workload for network administrators: The software allows you to configure multiple monitors uniformly in a single step – via a USB connection. This saves you time and ensures you have the same settings on all screens. The configuration can be saved as an XML file and transferred to clients.

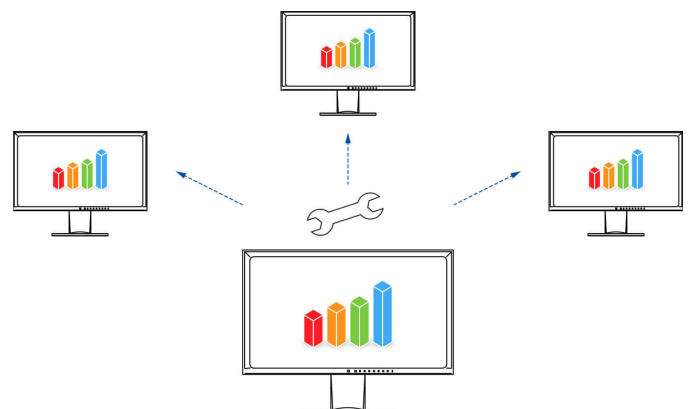



## Features

### Screen InStyle

In addition to the on-screen menu, you can conveniently control the EV2795-WT by using the Screen InStyle software on a Windows PC. The configuration options include colour reproduction, energysaving options, and ergonomic functions that, for example, allow you to reduce the blue light portion (Circadian Dimming). The Screen InStyle software allows the user to apply the settings to all connected screens when using a multi-screen system.

[More about Screen InStyle](#)

Screen InStyle Server is a server application that allows system administrators to centrally manage and control monitors on which Screen InStyle is installed and which are connected to the network. This optimises power consumption and simplifies monitor asset management.

[More about Screen InStyle Server](#)


### Save up to 30% of energy with the EcoView Optimizer

Save electricity without compromising quality: The EcoView Optimizer reduces the background lighting fully automatically for dark images. This reduces electricity consumption by up to 30%. At the same time, the signal is amplified and the colour tone values adjusted. The result: You will enjoy the image quality you are used to but consume less power.



### Zero-watt consumption thanks to the power switch

The monitors have an integrated mechanical power switch, which is extremely practical and energy-saving: If you switch off the monitor using the power switch, the device will stop consuming any power at all. Moreover, it consumes a maximum of 0,5 watt in standby mode.

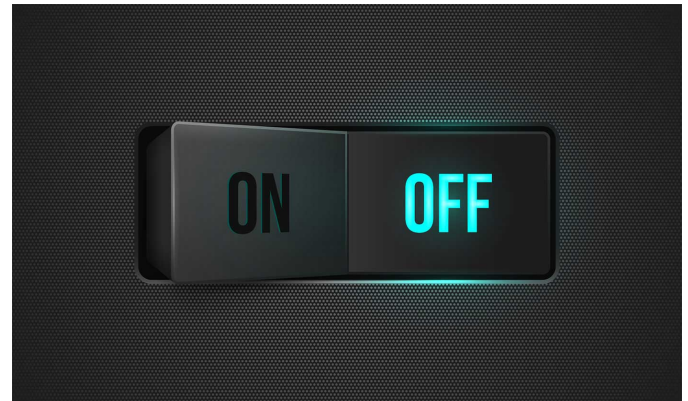

### Environmentally and socially conscious production

EIZO uses the EV2795-WT to showcase how image and product quality go hand in hand with responsible planning, material procurement and production. This intrinsic value enables you to make a safe investment in a modern and reliable monitor.

### Sustainable and durable

The EV2795-WT is designed for a long service life that takes into account the entire lifecycle and impact on the environment. It is generally well above the five-year guarantee. Spare parts are available up to five years after the end of production. The monitor's long service life and the ability to repair it save resources and the climate. When designing the EV2795-WT we paid attention to reducing resource consumption by using high-quality components and materials and being meticulous in production. The packaging of the EV2795-WT consists of cardboard box made of 85% recycled paper, while the transport padding is even 100% recycled plastic.



## Features

### Environmentally and climate friendly

Each EV2795-WT is manufactured in our own factory, which implements an environmental management system in accordance with ISO 14001. This includes measures to reduce waste, wastewater and emissions, resource and energy consumption, as well as to encourage environmentally conscious behaviour among employees. We publicly report on these measures on an annual basis as a main component of our CSR report.




### Compliance with standards and guidelines

The monitor is certified according to important and all-encompassing sustainability standards such as TCO Certified Generation 8, EPEAT and Energy Star. The EV2795-WT is a safe investment, when taking into account issues such as ESG (Environmental, social and corporate governance) or SDG (Sustainable Development Goals) from the United Nations and following the necessary guidelines.

Examples of compliance at EIZO include:

- ✓ Safe use of chemicals in cable insulation
- ✓ Comprehensive information transparency after servicing for the entire product lifecycle
- ✓ Safe management of chemicals throughout the entire production process.
- ✓ Appropriate work time management for employees.
- ✓ Anti-corruption management system
- ✓ Responsible procurement of minerals
- ✓ Disclosure of information on energy management

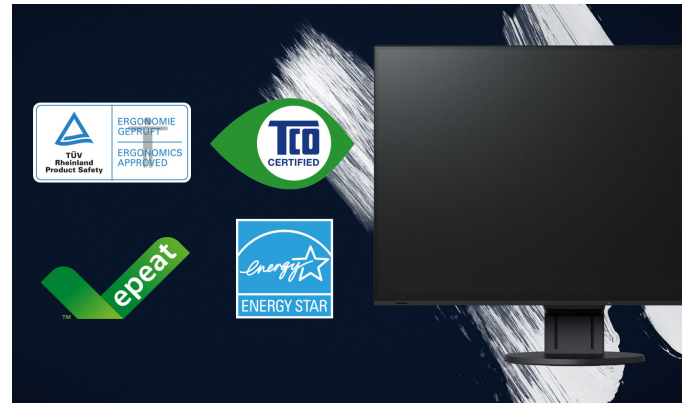

### Five-year warranty

EIZO grants a five-year warranty. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative monitor technology, made from high-end materials.



# Specification

## General

|                      |                           |
|----------------------|---------------------------|
| Item no.             | EV2795-WT                 |
| Case colors          | White                     |
| Areas of application | Office, Gaming            |
| Product line         | FlexScan                  |
| EAN                  | 4995047056645             |
| Variants             | EV2795-BK (Colour: Black) |

## Display

|   |   |
|---|---|
| Screen size [in inches]                               | 27  |
| Screen size [in cm]                                   | 68,5  |
| Format  | 16:9  |
| Viewable image size (width x height)                  | 597 x 336   |
| Ideal and recommended resolution                      | 2560 x 1440   |
| Pixel pitch [mm]                                      | 0,233 x 0,233   |
| Pixel density [ppi]                                   | 109   |
| Resolution supported                                  | 2560 x 1440, 1920 x 1200, 1920 x 1080 (Full HD), 1680 x 1050, 1600 x 1200, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480 |
| Panel technology                                      | IPS   |
| Max. viewing angle horizontal                         | 178 °   |
| Max. viewing angle vertical                           | 178 °   |
| Number of colours or greyscale                        | 16.7 million colours (display port, 8 Bit), 16.7 million colours (HDMI, 8 Bit)  |
| Colour palette/look-up table                          | More than 1.06 billion hues/14-bit  |
| Max. colour space (typical)                           | sRGB  |
| Max. brightness (typical) [in cd/m²]                  | 350   |
| Max. dark room contrast (typical)                     | 1000:1  |
| Typical response time [grey/grey alternation]         | 5 ms  |
| Typical response time [black/white/black alternation] | 14 ms   |
| Max. refresh rate [in hertz]                          | 60  |
| Backlight   | LED   |

## Features & control

|   |  |
|---|--|
| USB-C docking                           | ✓  |
| LAN supported                           | ✓  |
| Preset colour/greyscale modes           | sRGB, Paper, DICOM, Movie, 2x free modes for user selection  |
| DICOM tone curve                        | ✓  |
| RadiCS application classes              | VIII   |
| Auto EcoView                            | ✓  |
| EcoView Index                           | ✓  |
| EcoView Optimizer                       | ✓  |
| Overdrive                               | ✓  |
| No flickering thanks to hybrid controls | ✓  |
| HDCP Decoder                            | ✓  |
| Input signal identification             | ✓  |
| KVM switch                              | ✓  |
| Built-in speakers                       | ✓  |
| OSD language                            | de, en, fr, es, it, se   |
| Adjustment options                      | Brightness, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature, Resolution, Colour Mode, Colour tone, Overdrive, Volume, Audio source, Signal input, OSD language, Interpolation, Audio input (USB-C, DisplayPort/HDMI) |
| Button Guide                            | ✓  |
| Integrated power unit                   | ✓  |

## Certification & standards

|               |  |
|---------------|--|
| Certification | CE, CB, TCO certified 8.0, EPA Energy Star, TÜV/GS, TÜV/Ergonomics (including ISO 9241-307), TÜV/Blue Low Light Content, TÜV/Flicker Free, EPEAT 2018 (US), cTÜVus, TÜV/S, EAC, PSE, FCC-B, CAN ICES-3 (B), RCM, VCCI-B, CCC, RoHS, China RoHS, WEEE |
|---------------|--|

## Ports

|  |  |
|--|--|
| Signal inputs                            | USB-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 1.4)                            |
| Signal outputs/Daisy chain compatibility | USB-C  |
| USB specification                        | USB 3.1 Gen 1  |
| USB upstream ports                       | 1 x type C (DisplayPort Alt Mode, LAN, 70 W max.), 1 x type B  |
| USB downstream ports                     | 1 x type C (DisplayPort Alt Mode, 15 W max.), 3 x type A (1 x 10.5 W battery charging function)            |
| LAN standards                            | RJ-45 (LAN pass through to USB-C), IEEE802.3ab (1000BASE-T), IEEE802.3u (100BASE-TX), IEEE802.3 (10BASE-T) |
| Video signal                             | USB-C, DisplayPort, HDMI (YUV, RGB)  |
| Audio input                              | USB-C, DisplayPort, HDMI   |
| Audio output                             | 3.5 mm stereo jack   |

## Electric data

|                                       |   |
|---------------------------------------|---|
| Frequency                             | USB-C: 31-89 kHz/59-61 Hz, DisplayPort: 31-89 kHz/59-61 Hz, HDMI: 31-89 kHz/49-51 Hz/59-61 Hz |
| Power consumption (typical) [in watt] | 16  |
| Maximum Power Consumption [in watt]   | 164 (at maximum brightness with all signal inputs and USB ports in use)                       |
| Power Save Mode [in watt]             | 0,5   |
| Power consumption off [in watt]       | 0   |
| Energy-efficiency class               | A++   |
| Annual energy consumption [in kWh]    | 23  |
| Power supply                          | AC 100-120 V / 200-240 V, 50/60 Hz  |
| Power management                      | ✓   |

## Dimensions & weights

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| Dimensions [mm]                     | 611 x (369 - 545) x 230              |
| Weight [in kilograms]               | 8,5                                  |
| Dimensions without stand [mm]       | 611 x 357 x 56                       |
| Weight without stand [in kilograms] | 5,7                                  |
| Swivel                              | 344 °                                |
| Incline forward/backward            | 5 ° / 35 °                           |
| Pivot                               | ✓ 90° (clockwise and anti-clockwise) |
| Height adjustment range [mm]        | 176,6                                |
| Hole spacing                        | VESA standard 100 x 100 mm           |

## Software & accessories

|  |   |
|--|---|
| Accompanying software and other accessories are available for download | Screen InStyle  |
| Additional supply  | Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection   |
| Accessories  | EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PCSK-03R-WT (Thin Client Mount for the EIZO FlexStand 3R stand), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cable, 200 cm), CC100-WT (Short USB-C port cable, 100 cm) |

## Warranty

|                      |                   |
|----------------------|-------------------|
| Warranty and service | 5 years warranty* |
|----------------------|-------------------|

### Terms

\*) Maximum of 30,000 hours of operation from the date of purchase.\*\*) Zero pixel error guarantee for completely lit sub-pixels (partial pixels ISO 9241-307). Valid: six months from the purchase date.