



# LSD500HD/V53HD/LS740HD-5/ V52HD-5

# LSD600W/LS740W-5

Projector

User Guide 

IMPORTANT: Please read this User Guide to obtain important information on installing and using your product in a safe manner, as well as registering your product for future service. Warranty information contained in this User Guide will describe your limited coverage from ViewSonic® Corporation, which is also found on our web site at <http://www.viewsonic.com> in English, or in specific languages using the Regional selection box of our website.

Model Number : VS20995 | VS20996

Product Name : LSD500HD | V53HD | LS740HD-5 | V52HD-5  
LSD600W | LS740W-5

## **Thank you for choosing ViewSonic®**

As a world-leading provider of visual solutions, ViewSonic® is dedicated to exceeding the world's expectations for technological evolution, innovation, and simplicity. At ViewSonic®, we believe that our products have the potential to make a positive impact in the world, and we are confident that the ViewSonic® product you have chosen will serve you well.

Once again, thank you for choosing ViewSonic®!

# Safety Precautions

Read these instructions carefully, keep them in a safe place, and follow all warnings and instructions.

## General Safety Precautions

- During normal operation, warm air and a slight odor may come from the ventilation.
- When using the projector, avoid direct exposure to the projector's exhaust vent.
- Keep the remote control or loose batteries away from children or pets.

## Installation

- Follow the manufacturer's recommended installation guidelines to ensure safe and optimal operation.
- Leave at least 50 cm (20 in.) of open space around the projector to ensure proper ventilation.
- Place the projector in a well-ventilated area. Do not place anything on the projector that prevents heat dissipation.
- Do not place any heavy objects on the projector or cables.
- Do not place the projector in an unstable location. The projector may fall, resulting in injury or damage.
- Do not stand the projector upright. The projector may fall, resulting in injury or damage.
- Do not use the projector near open flames, sparks, or hot surfaces.
- Do not use the projector near water or in humid conditions and avoid exposing it to rain or moisture.
- Do not expose the projector to direct sunlight or other sources of sustained heat.
- Always route and manage cables connected to your projector to prevent tripping, pulling, or grabbing.
- The projector is designed to operate at 120/240V AC. Unstable voltages can harm the projector. Use a power stabilizer, surge protector, or UPS in areas with frequent power cuts or surges.

## **Power Cord Safety**

- Do not compress the power cord, particularly at the plug and at the point where it connects to the projector.
- Do not use the projector if the power cord or plug is damaged.
- The power cord is designed with a grounding prong to ensure safe operation. Do not remove or damage the grounding prong.
- Only use the original power cord and do not use damaged or modified cords.
- Unplug the projector when it will be unused for long periods of time.

## **Handling**

- When moving the projector, handle it with care to avoid damage or injury.
- Only use attachments and accessories specifically designed and approved by the manufacturer to ensure compatibility and safety.

## **Troubleshooting**

- If smoke appears, an abnormal noise, or a strange odor is present, immediately turn the projector off and contact your reseller or ViewSonic. It is dangerous to continue using the projector.
- Refer all servicing to qualified service personnel.
- Do not disassemble the projector. It contains electrical components that can cause shock.


## **Lens Safety**

- When using the projector, avoid looking directly at the projector lens.
- Avoid blocking the projection lens when using the projector, as this can cause objects to overheat and potentially ignite.
- When using the projector, make sure the lens shutter is open and the lens cap is removed.

## Ceiling Mounting

- Use a compatible ceiling mount kit and ensure secure installation for safe operation.
- Improper ceiling mount kits can lead to projector falls due to incorrect screw size or length.
- Ceiling mounting is recommended to place the projector above the eyes of children.

## Caution

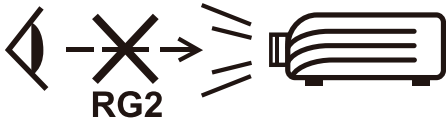


Possibly hazardous optical radiation is emitted from this product. As with any bright light source, do not stare into the beam, RG2 IEC 62471-5:2015. Additional warning against eye exposure for close exposures less than 1 m (3.28 ft).

## Laser Caution

This product belongs to CLASS I laser product and complies with IEC 60825-1:2014, EN 60825-1:2014/A11:2021, EN 50689:2021. CLASS 1 CONSUMER LASER PRODUCT EN50689:2021.

IEC 60825-1:2014, EN 60825-1:2014+A11:2021, EN 50689:2021 CLASS 1 CONSUMER LASER  
PRODUCT RISK GROUP 2, Complies with 21 CFR 1040.10 and 1040.11 except for conformance as  
a Risk Group 2 LIP as defined in IEC 62471-5:Ed.1.0. For more information see Laser Notice No. 57,  
dated May 8, 2019.  
IEC 60825-1:2014 等級1雷射產品RG2危險等級  
IEC 60825-1:2014 1類激光產品RG2危險等級

The above laser cautions are located on the bottom of this projector.

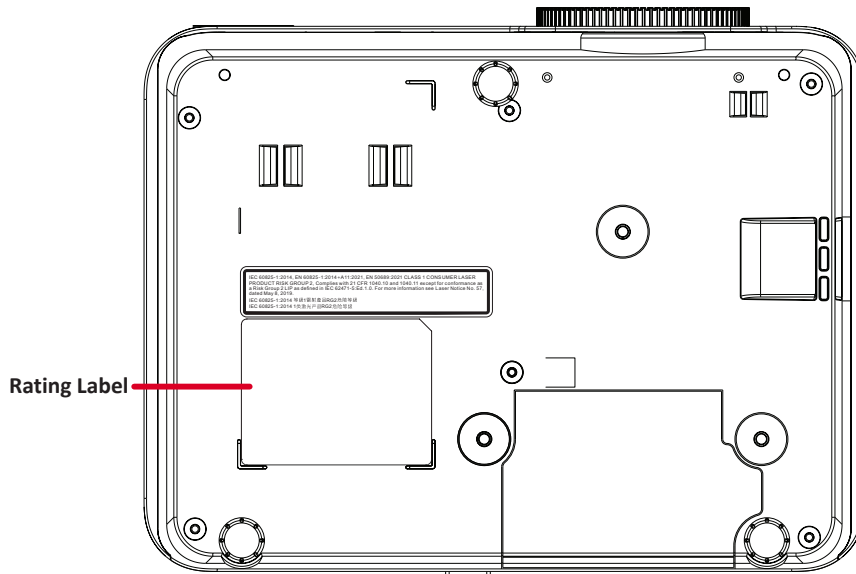

- Notice is given to supervise children and to never allow them to stare into the projector beam at any distance from the projector.
- Notice is given to use caution when using the remote control for starting the projector while in front of the projection lens.
- Notice is given to the user to avoid the use of optical aids such as binoculars or telescopes inside the beam.

# Contents

<b>Safety Precautions.....</b>	<b>3</b>
<b>Introduction .....</b>	<b>10</b>
Package Contents .....	10
LSD500HD   V53HD   LS740HD-5   V52HD-5.....	10
LSD600W   LS740W-5 .....	11
Projector .....	12
Overview .....	12
Keypad.....	14
Indicator Lights.....	14
I/O Ports .....	15
Remote Control .....	17
Overview .....	17
Receiver Range.....	19
Installing the Batteries .....	20
<b>Initial Setup.....</b>	<b>21</b>
Positioning the Projector .....	21
Projection Dimensions.....	22
LSD500HD   V53HD   LS740HD-5   V52HD-5.....	22
LSD600W   LS740W-5 .....	24
Mounting the Projector .....	26
Using the Security Bar .....	27
<b>Making Connections.....</b>	<b>28</b>
Connecting to Power .....	28
Connecting to External Devices .....	29


<b>Using the Projector.....</b>	<b>30</b>
Turning the Projector On.....	30
Turning the Projector Off .....	30
Selecting an Input Source .....	31
Adjusting the Projected Image .....	32
Projection Angle .....	32
Image Size and Clarity .....	32
Correcting Keystone .....	33
<b>Menu Operation.....</b>	<b>34</b>
On-Screen Display Menu .....	34
Menu Navigation .....	35
Menu Options.....	36
Display .....	36
Audio .....	39
Setup .....	40
Network.....	43
Information .....	46
<b>Appendix.....</b>	<b>47</b>
Specifications.....	47
Projector Dimensions .....	48
LSD500HD   V53HD   LS740HD-5   V52HD-5.....	48
LSD600W   LS740W-5 .....	48
On-Screen Display Menu Tree .....	49
Supported Resolutions and Timings .....	55
HDMI 1   HDMI 2 .....	55
Troubleshooting .....	57
LED Indicators.....	60
Maintenance.....	61
General Precautions.....	61
Cleaning the Lens .....	61
Cleaning the Case .....	61
Storing the Projector .....	61
Disclaimer.....	61

<b>Regulatory and Service Information .....</b>	<b>62</b>
Compliance Information.....	62
FCC Compliance Statement.....	62
Industry Canada Statement.....	62
CE Conformity for European Countries .....	63
Declaration of RoHS2 Compliance.....	64
Indian Restriction of Hazardous Substances .....	65
Product Disposal at End of Product Life .....	65
Copyright Information .....	66
Customer Service .....	67
Limited Warranty .....	68
Mexico Limited Warranty.....	71

# Introduction

## Package Contents


LSD500HD | V53HD | LS740HD-5 | V52HD-5

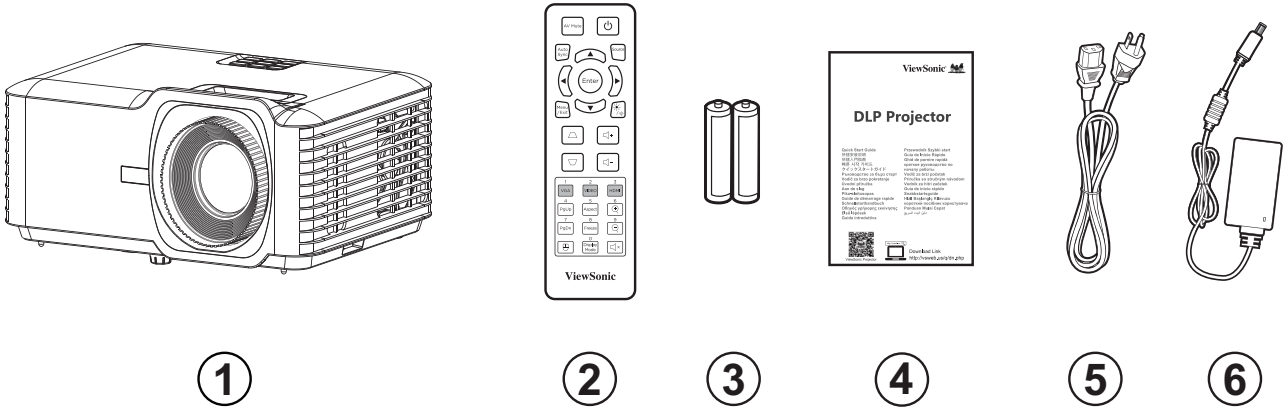


Number	Item
1	Projector
2	Remote Control
3	Batteries
4	Quick Start Guide
5	Power Cord
6	Power Adapter

**Note:** The cables and remote control may vary depending on the region or country you purchased the product.


# LSD600W | LS740W-5

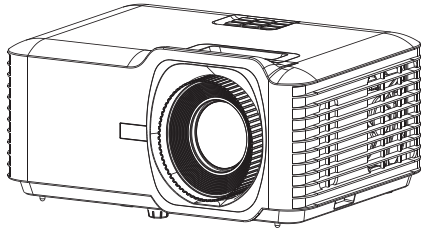

①



②



③



④



⑤



⑥


Number	Item
1	Projector
2	Remote Control
3	Batteries
4	Quick Start Guide
5	Power Cord
6	Power Adapter

**Note:** The cables and remote control may vary depending on the region or country you purchased the product.

# Projector



## Overview

LSD500HD | V53HD | LS740HD-5 | V52HD-5

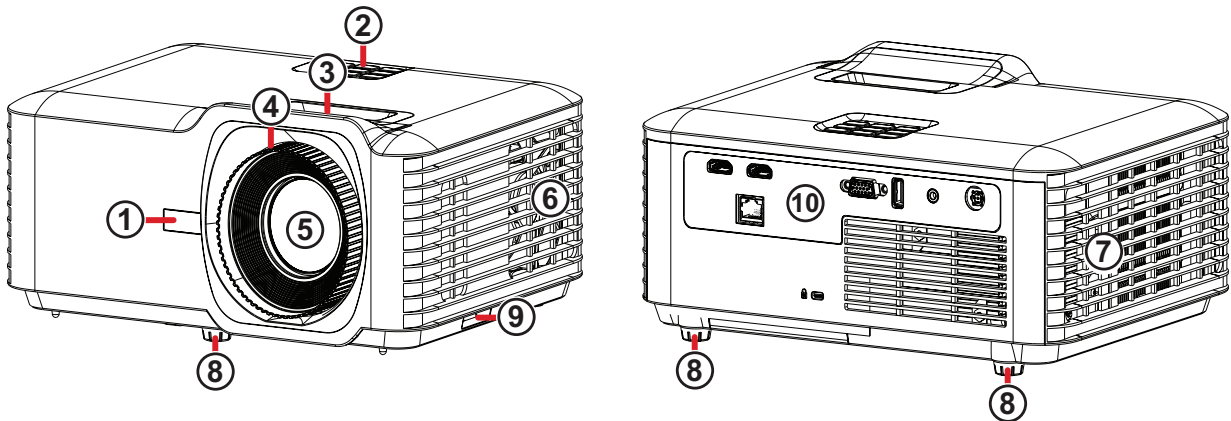


Number	Part
1	Remote Control IR Receiver
2	Keypad and Indicator Lights
3	Zoom Ring
4	Focus Ring
5	Projection Lens
6	Vent
7	Vent
8	Adjustable Feet
9	Security Bar
10	I/O Ports



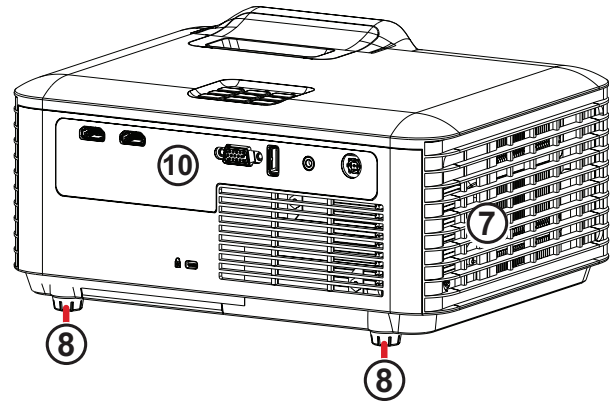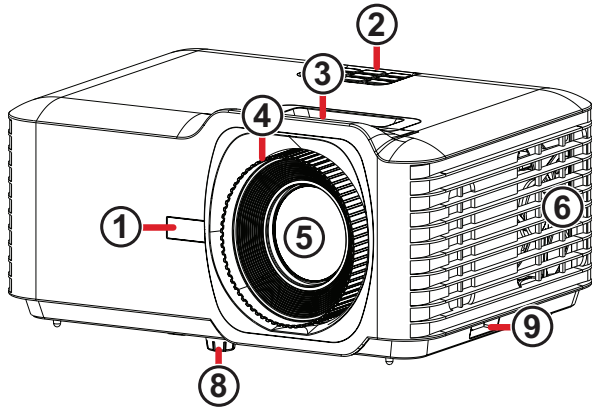

LSD600W | LS740W-5



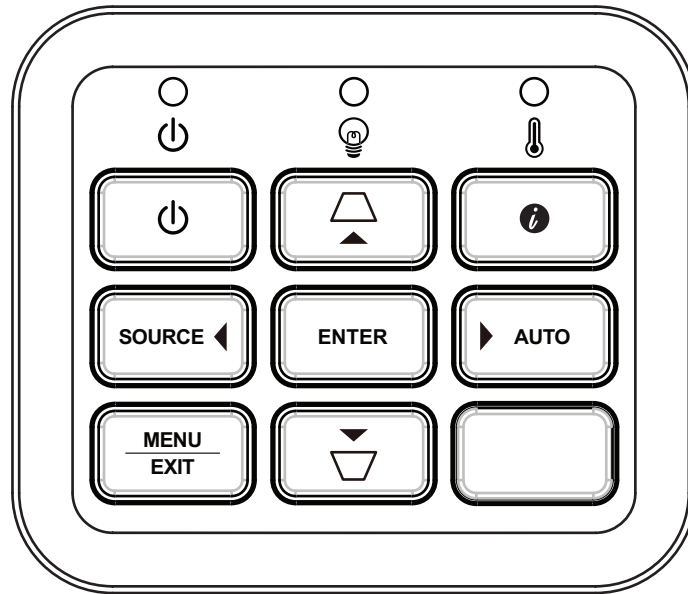


Number	Part
1	Remote Control IR Receiver
2	Keypad and Indicator Lights
3	Zoom Ring
4	Focus Ring
5	Projection Lens
6	Vent
7	Vent
8	Adjustable Feet
9	Security Bar
10	I/O Ports

## Keypad




Button	Description
	<b>Power</b> Turns the projector on and off.
	<b>Keystone</b> Corrects distorted images.
	<b>Navigation</b> Selects an item or adjusts the value in the menu.
<b>MENU</b>	<b>Menu</b> Opens the On-Screen Display Menu.
<b>EXIT</b>	<b>Exit</b> Closes the On-Screen Display Menu.
<b>SOURCE</b>	<b>Source</b> Opens the input source menu.
	<b>Information</b> Opens the <b>Information</b> menu.
<b>ENTER</b>	<b>Enter</b> Confirms the selected item.
<b>AUTO</b>	<b>Auto</b> Selects the best resolution and timing for the projected image.

## Indicator Lights


Indicator Light	Description
	Power indicator light
	Light source indicator light
	Temperature indicator light

## I/O Ports

LSD500HD | V53HD | LS740HD-5 | V52HD-5

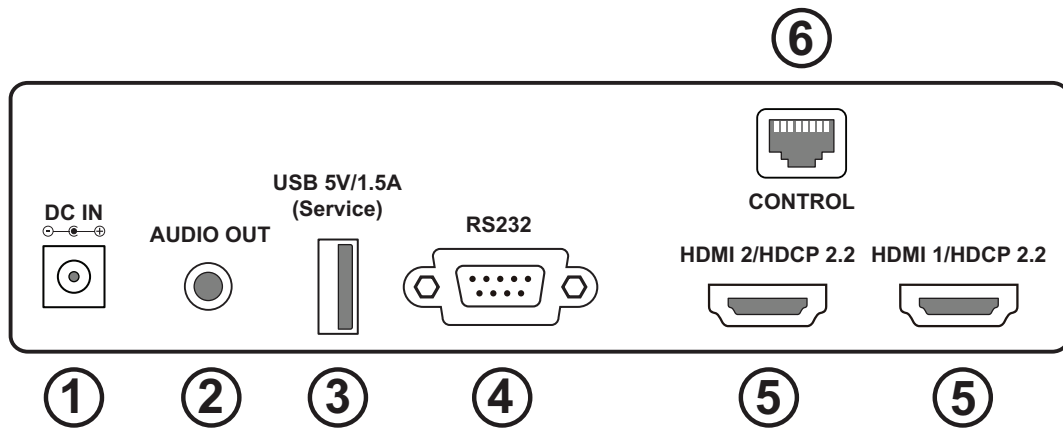




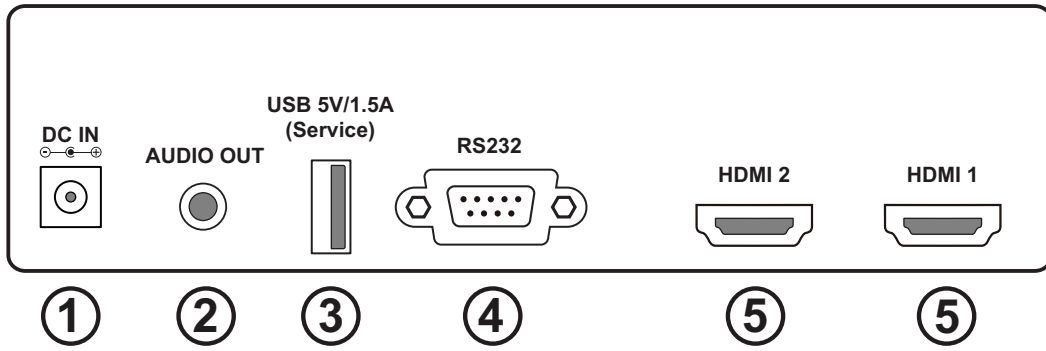





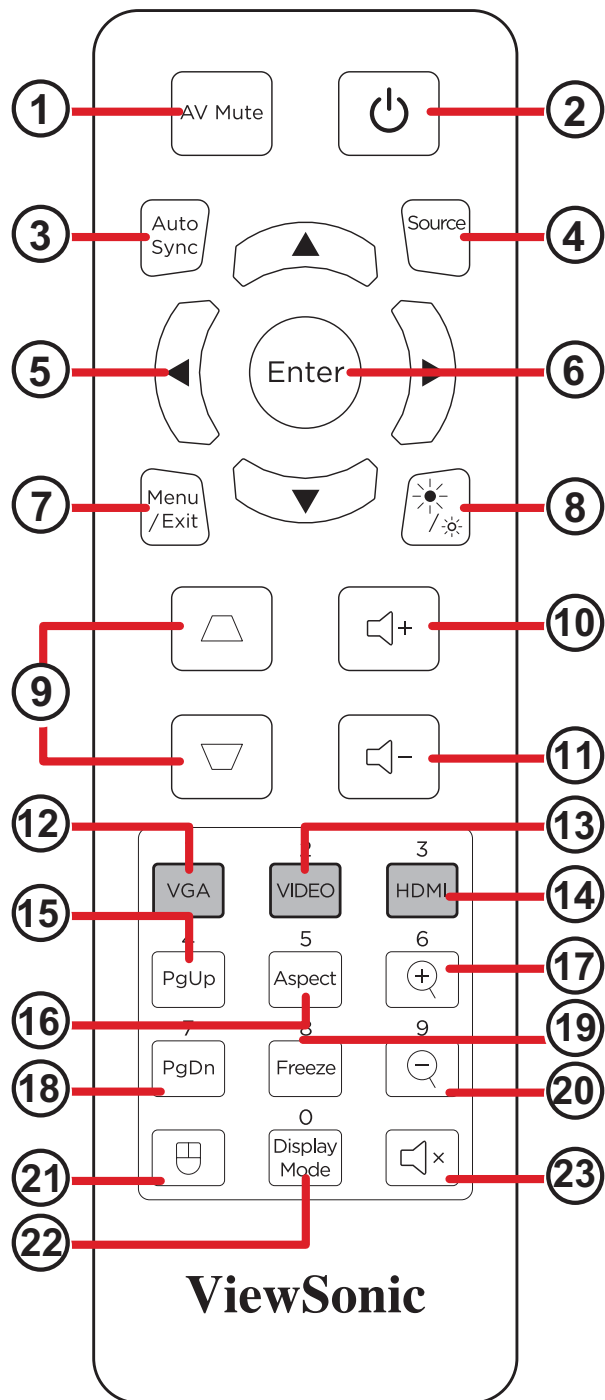














Connection Type		Usage
1	DC IN	For powering the projector.
2	Audio Out	For use with external speakers.
3	USB Type A	For servicing and powering devices.
4	RS-232	For remote operation of the projector's power, volume, input selection, brightness, and other functions from an external computer.
5	HDMI	HDMI v. 2.0 that supports HDCP 2.2 for audio/video projection.
6	RJ45	For network remote operation.



Connection Type		Usage
1	DC IN	For powering the projector.
2	Audio Out	For use with external speakers.
3	USB Type A	For servicing and powering devices.
4	RS-232	For remote control of the projector's power, volume, input selection, brightness, and other functions from an external computer.
5	HDMI	HDMI v. 1.4 that supports HDCP 1.4 for audio/video projection.


# Remote Control Overview




Button		Description
1		<b>AV Mute</b> Hides the projected image and mutes the volume.
2		<b>Power</b> Turns the projector on and off.
3		<b>Auto Sync</b> Selects the best resolution and timing for the projected image.
4		<b>Source</b> Opens the input source menu.
5		<b>Navigation</b> Selects an item or adjusts the value in the menu.
6		<b>Enter</b> Confirms the selected item.
7		<b>Menu</b> Opens the On-Screen Display Menu.
		<b>Exit</b> Closes the On-Screen Display Menu.
8		<b>Brightness</b> Opens the <b>Light Source Mode</b> menu.
9		<b>Keystone</b> Corrects distorted images.
10		<b>Volume Up</b> Increases the volume level.
11		<b>Volume Down</b> Decreases the volume level.
12		<b>VGA</b> <i>This button is unsupported.</i>
13		<b>Video</b> <i>This button is unsupported.</i>
14		<b>HDMI</b> Sets HDMI as the input source.
15		<b>Page Up</b> <i>This button is unsupported.</i>
16		<b>Aspect</b> Opens the <b>Aspect Ratio</b> menu.
17		<b>Zoom In</b> Increases the projected image's size.
18		<b>Page Down</b> <i>This button is unsupported.</i>
19		<b>Freeze</b> Holds the projected image.
20		<b>Zoom Out</b> Decreases the projected image's size.
21		<b>Mouse Mode</b> <i>This button is unsupported.</i>
22		<b>Display Mode</b> Opens the <b>Color Mode</b> menu.
23		<b>Mute</b> Stops audio output.

## Receiver Range

For optimal performance, aim the remote control directly at the IR receiver. The maximum operation range is 8 m (26 ft) with a horizontal and vertical field of view of  $\pm 30$  degrees.

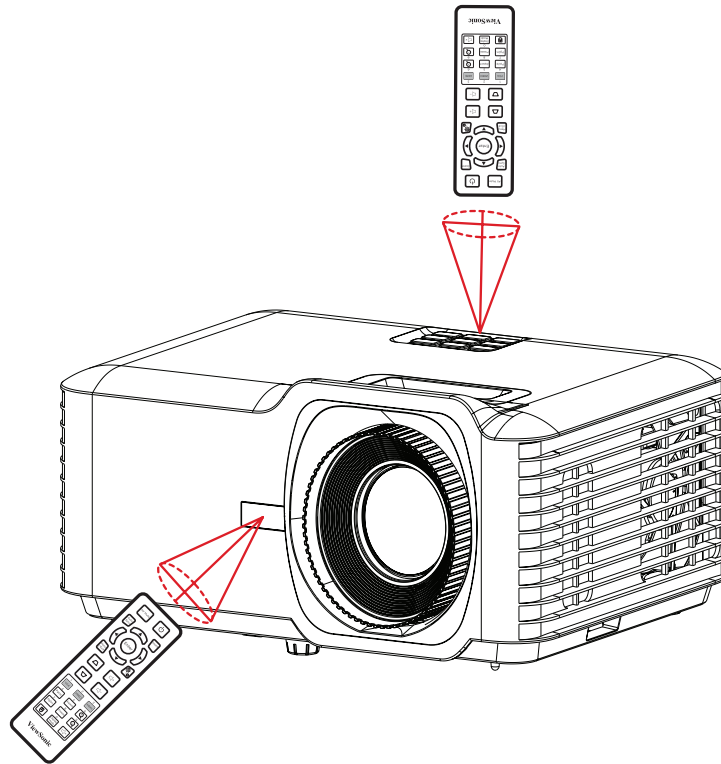

## Installing the Batteries

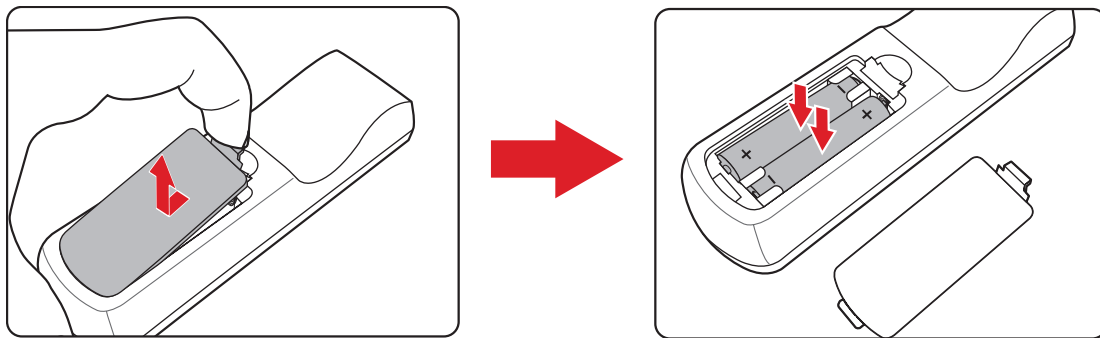

1. Open the battery compartment by removing the battery cover.
2. Insert two AAA batteries, ensuring correct polarity.
3. Replace the battery cover and press it down until it clicks into place.





### Note:

- Store the remote control and batteries away from heat and humidity.
- Use only recommended battery types.
- Remove batteries when not in use for extended periods.
- Dispose of old batteries following the manufacturer's instructions and local regulations.

# Initial Setup

## Positioning the Projector

The projector can be positioned either in front of or behind the screen. Alternatively, it can be mounted on the ceiling.

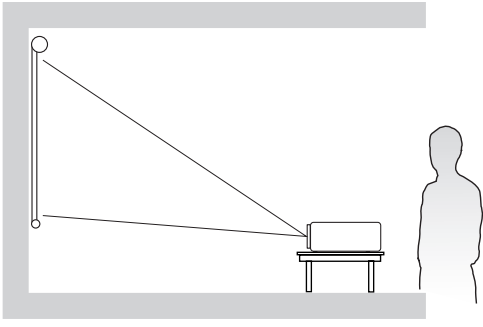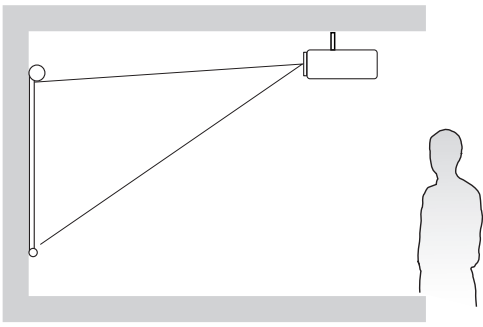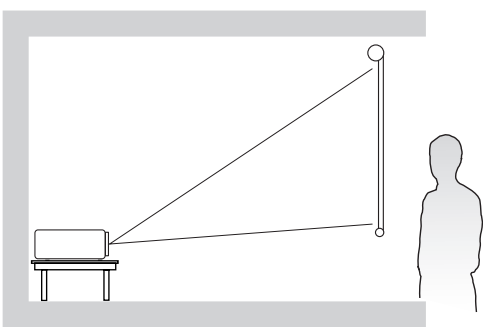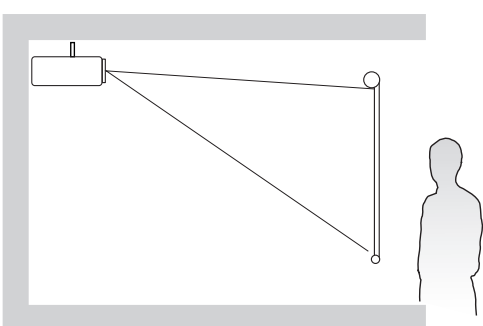Position	Description
Front	 A diagram showing a projector on a stand in front of a screen. The projector is positioned to the right of the screen, and its beam is directed towards the screen. A person is standing to the right of the screen, looking at it.
Ceiling-Top	 A diagram showing a projector mounted on the ceiling. The projector is positioned above the screen, and its beam is directed towards the screen. A person is standing to the right of the screen, looking at it.
Rear <sup>1</sup>	 A diagram showing a projector on a stand behind the screen. The projector is positioned to the left of the screen, and its beam is directed towards the screen. A person is standing to the right of the screen, looking at it.
Rear-Top <sup>1</sup>	 A diagram showing a projector mounted on the ceiling behind the screen. The projector is positioned above the screen, and its beam is directed towards the screen. A person is standing to the right of the screen, looking at it.


<sup>1</sup> – A rear projection screen is required.

# Projection Dimensions

LSD500HD | V53HD | LS740HD-5 | V52HD-5

Use the tables below to determine the recommended projector-to-screen distance for your desired image height.

## 16:9 Image on a 16:9 Screen

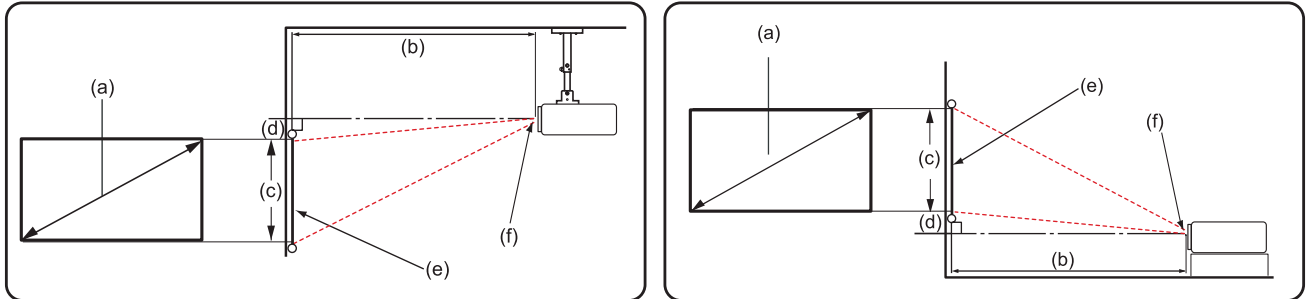


**Note:** (e) = Screen / (f) = Center of Lens

(a) Screen Size		(b) Projection Distance				(c) Image Height		(d) Vertical Offset	
		Minimum		Maximum					
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
30	762	29.55	750	38.44	976	14.71	374	2.35	60
40	1016	39.40	1001	51.25	1302	19.61	498	3.14	80
50	1270	49.24	1251	64.06	1627	24.51	623	3.92	100
60	1524	59.09	1501	76.87	1953	29.42	747	4.71	120
70	1778	68.94	1751	89.69	2278	34.32	872	5.49	139
80	2032	78.79	2001	102.50	2603	39.22	996	6.28	159
90	2286	88.64	2251	115.31	2929	44.12	1121	7.06	179
100	2540	98.49	2502	128.12	3254	49.03	1245	7.84	199
110	2794	108.34	2752	140.93	3580	53.93	1370	8.63	219
120	3048	118.19	3002	153.75	3905	58.83	1494	9.41	239
130	3302	128.03	3252	166.56	4231	63.73	1619	10.20	259
140	3556	137.88	3502	179.37	4556	68.64	1743	10.98	279
150	3810	147.73	3752	192.18	4881	73.54	1868	11.77	299
200	5080	196.98	5003	256.24	6509	98.05	2491	15.69	398
250	6350	246.22	6254	320.30	8136	122.57	3113	19.61	498
300	7620	295.46	7505	384.36	9763	147.08	3736	23.53	598

**Note:**

- These figures are for reference purposes only when setting up the projector.
- For optimal results, test the projector's image size and distance before permanent installation.

## 16:9 Image on a 4:3 Screen

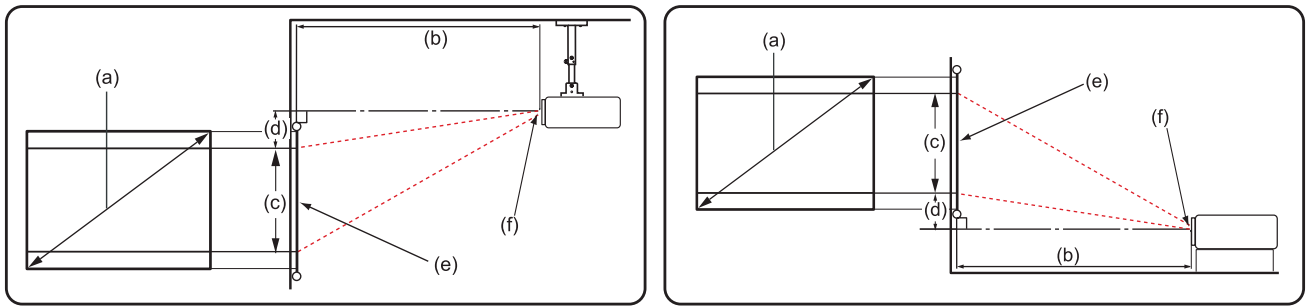

**Note:** (e) = Screen / (f) = Center of Lens

(a) Screen Size		(b) Projection Distance				(c) Image Height		(d) Vertical Offset	
		Minimum		Maximum					
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
30	762	27.12	689	35.28	896	13.50	343	2.16	55
40	1016	36.16	918	47.04	1195	18.00	457	2.88	73
50	1270	45.20	1148	58.80	1494	22.50	572	3.60	91
60	1524	54.24	1378	70.56	1792	27.00	686	4.32	110
70	1778	63.28	1607	82.32	2091	31.50	800	5.04	128
80	2032	72.32	1837	94.08	2390	36.00	914	5.76	146
90	2286	81.36	2067	105.84	2688	40.50	1029	6.48	165
100	2540	90.40	2296	117.60	2987	45.00	1143	7.20	183
110	2794	99.44	2526	129.36	3286	49.50	1257	7.92	201
120	3048	108.48	2755	141.12	3584	54.00	1372	8.64	219
130	3302	117.52	2985	152.88	3883	58.50	1486	9.36	238
140	3556	126.56	3215	164.64	4182	63.00	1600	10.08	256
150	3810	135.60	3444	176.40	4481	67.50	1715	10.80	274
200	5080	180.80	4592	235.20	5974	90.00	2286	14.40	366
250	6350	226.00	5740	294.00	7468	112.50	2858	18.00	457
300	7620	271.20	6888	352.80	8961	135.00	3429	21.60	549


**Note:**

- These figures are for reference purposes only when setting up the projector.
- For optimal results, test the projector's image size and distance before permanent installation.

## LSD600W | LS740W-5

Use the tables below to determine the recommended projector-to-screen distance for your desired image height.

### 16:10 Image on a 16:10 Screen

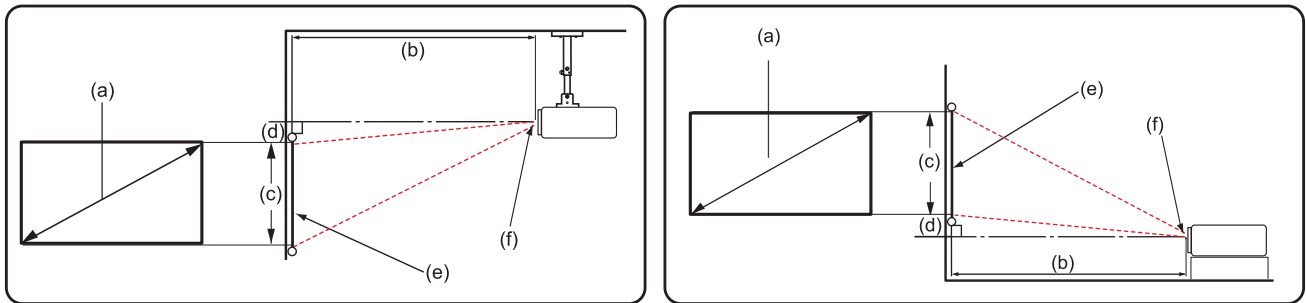


**Note:** (e) = Screen / (f) = Center of Lens

(a) Screen Size		(b) Projection Distance				(c) Image Height		(d) Vertical Offset	
		Minimum		Maximum					
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
30	762	30.02	762	39.18	995	15.90	404	1.97	50
40	1016	40.03	1017	52.24	1327	21.20	538	2.63	67
50	1270	50.03	1271	65.30	1659	26.50	673	3.29	83
60	1524	60.04	1525	78.36	1990	31.80	808	3.94	100
70	1778	70.04	1779	91.41	2322	37.10	942	4.60	117
80	2032	80.05	2033	104.47	2654	42.40	1077	5.26	134
90	2286	90.06	2287	117.53	2985	47.70	1212	5.91	150
100	2540	100.06	2542	130.59	3317	53.00	1346	6.57	167
110	2794	110.07	2796	143.65	3649	58.30	1481	7.23	184
120	3048	120.08	3050	156.71	3980	63.60	1615	7.89	200
130	3302	130.08	3304	169.77	4312	68.90	1750	8.54	217
140	3556	140.09	3558	182.83	4644	74.20	1885	9.20	234
150	3810	150.10	3812	195.89	4976	79.50	2019	9.86	250
200	5080	200.13	5083	261.18	6634	106.00	2692	13.14	334
250	6350	250.16	6354	326.48	8293	132.50	3365	16.43	417
300	7620	300.19	7625	391.78	9951	159.00	4039	19.72	501

**Note:**

- These figures are for reference purposes only when setting up the projector.
- For optimal results, test the projector's image size and distance before permanent installation.

## 16:10 Image on a 4:3 Screen

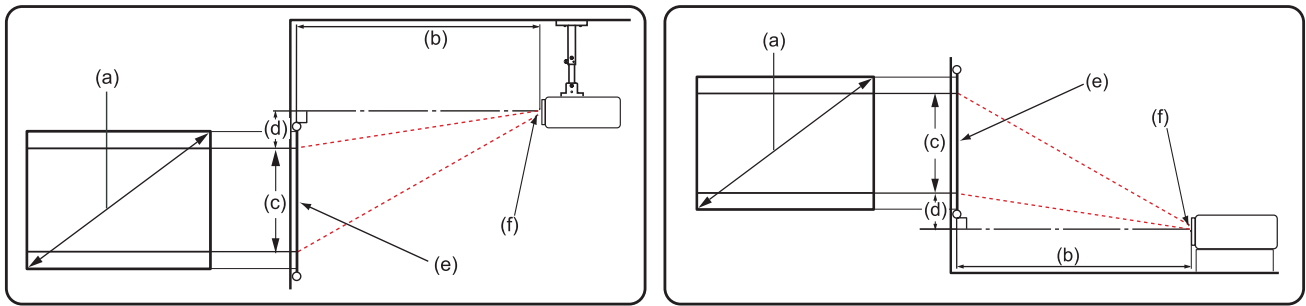

**Note:** (e) = Screen / (f) = Center of Lens

(a) Screen Size		(b) Projection Distance				(c) Image Height		(d) Vertical Offset	
		Minimum		Maximum					
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
30	762	28.32	719	36.96	939	15.00	381	1.86	47
40	1016	37.76	959	49.28	1252	20.00	508	2.48	63
50	1270	47.20	1199	61.60	1565	25.00	635	3.10	79
60	1524	56.64	1439	73.92	1878	30.00	762	3.72	94
70	1778	66.08	1678	86.24	2190	35.00	889	4.34	110
80	2032	75.52	1918	98.56	2503	40.00	1016	4.96	126
90	2286	84.96	2158	110.88	2816	45.00	1143	5.58	142
100	2540	94.40	2398	123.20	3129	50.00	1270	6.20	157
110	2794	103.84	2638	135.52	3442	55.00	1397	6.82	173
120	3048	113.28	2877	147.84	3755	60.00	1524	7.44	189
130	3302	122.72	3117	160.16	4068	65.00	1651	8.06	220
140	3556	132.16	3357	172.48	4381	70.00	1778	8.68	220
150	3810	141.60	3597	184.80	4694	75.00	1905	9.30	236
200	5080	188.80	4796	246.40	6259	100.00	2540	12.40	315
250	6350	236.00	5994	308.00	7823	125.00	3175	15.50	394
300	7620	283.20	7193	369.60	9388	150.00	3810	18.60	472

**Note:**


- These figures are for reference purposes only when setting up the projector.
- For optimal results, test the projector's image size and distance before permanent installation.

# Mounting the Projector

When mounting the projector:

- For optimal compatibility, please use a ViewSonic mount.
- When using a third-party mount, please note that screw sizes may vary depending on the mounting plate thickness.
- Use screws that meet the below specifications to ensure a secure attachment.


Screw Type	Maximum Screw Length
M4 x 8	8 mm

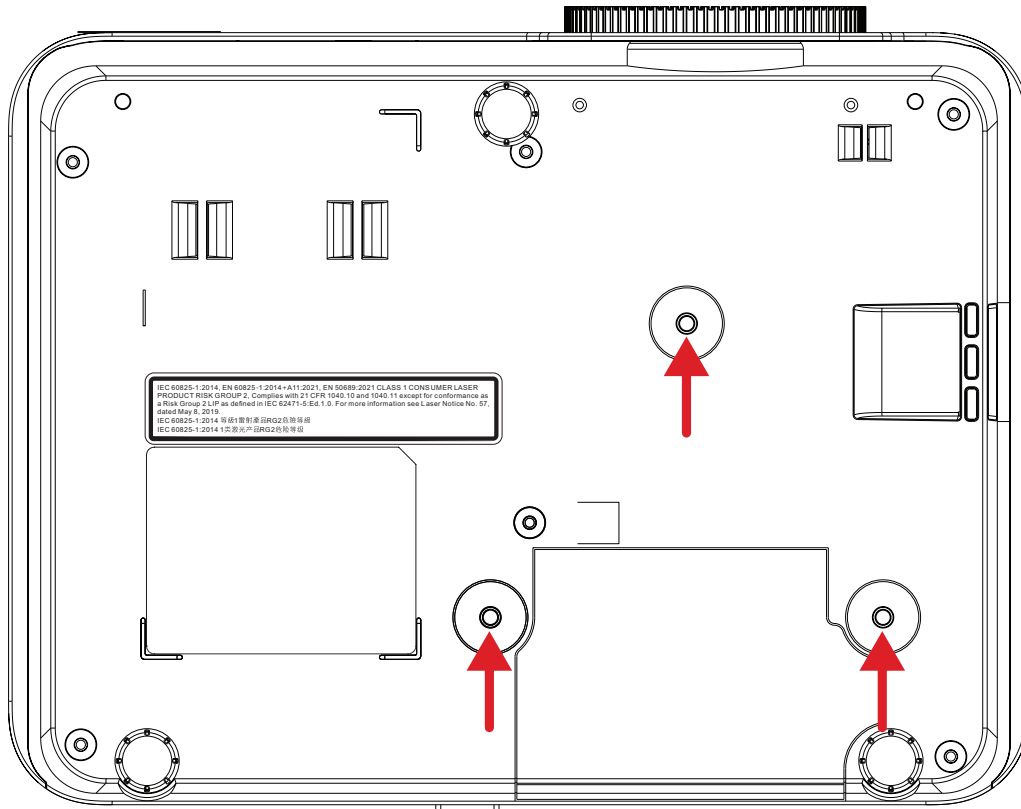

**Important:** Do not install the projector near a heat source or air conditioner.


## Using the Security Bar

To help prevent the projector from falling or being stolen, use a locking device to secure the projector to a fixed object.

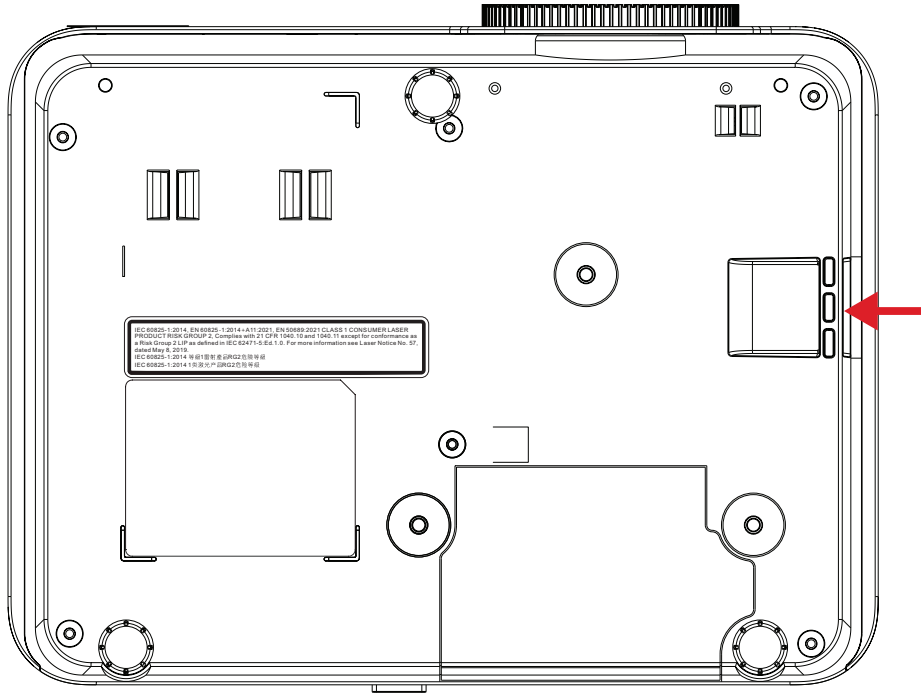

# Making Connections

## Connecting to Power

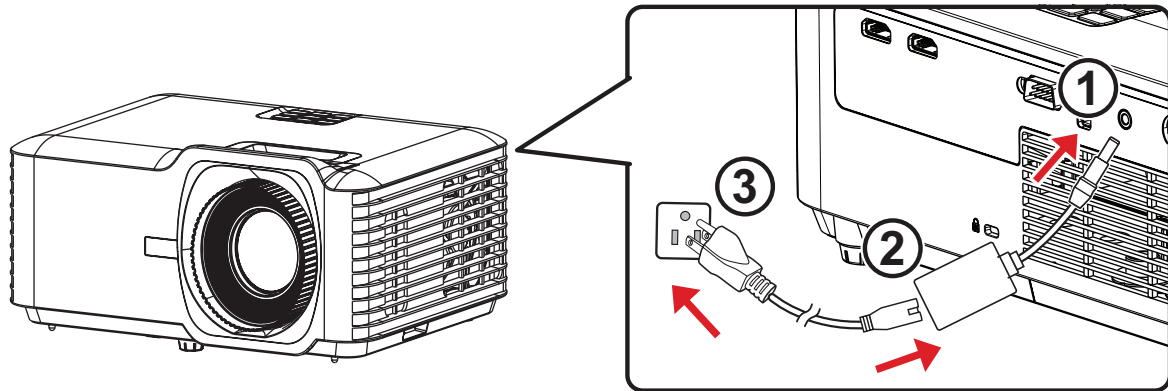


1. Connect the power adapter to the **DC IN** jack at the rear of the projector.
2. Connect the power adapter to the power cord.
3. Plug the power cord into a power outlet.

**Note:** When installing the projector, place a convenient disconnect device in the wiring or connect the power cord to an easily accessible outlet. In case of any issues, use this device or unplug the power cord to shut off the power supply immediately.

# Connecting to External Devices


## Note:

- For more information about the connection ports, please refer to “I/O Ports”.
- Compatibility and connectivity may differ between models.
- The **Control** port is only available on the LSD500HD/V53HD/LS740HD-5/V52HD-5 projector.
- The **HDMI 1** and **HDMI 2** ports on the LSD500HD/V53HD/LS740HD-5/V52HD-5 support HDMI 2.0/HDCP 2.2, while the HDMI 1.4/HDCP 1.4 standards are supported on the LSD600W/LS740W-5.

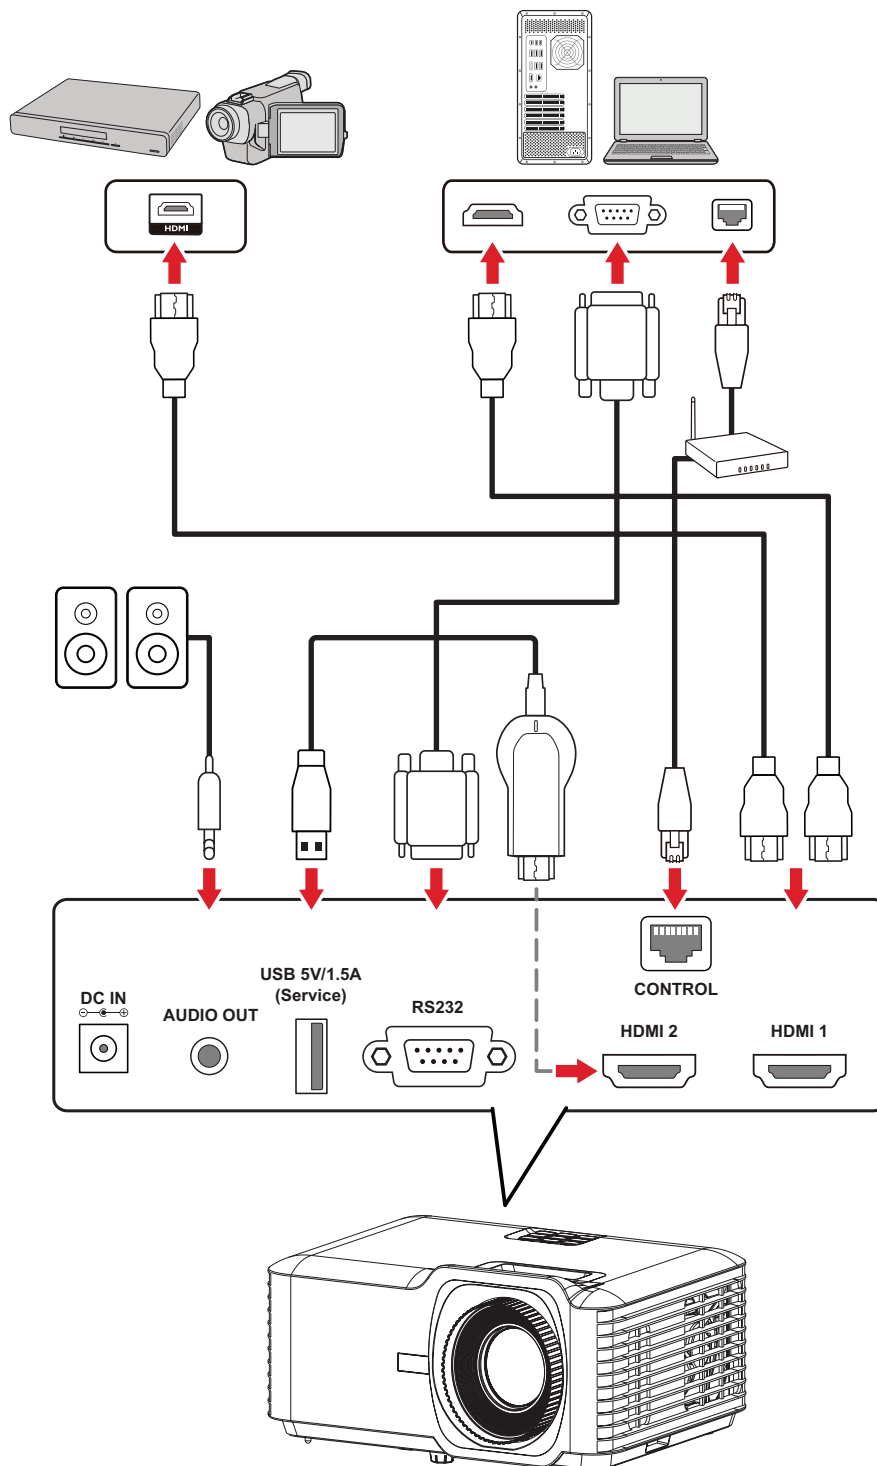

# Using the Projector

## Turning the Projector On

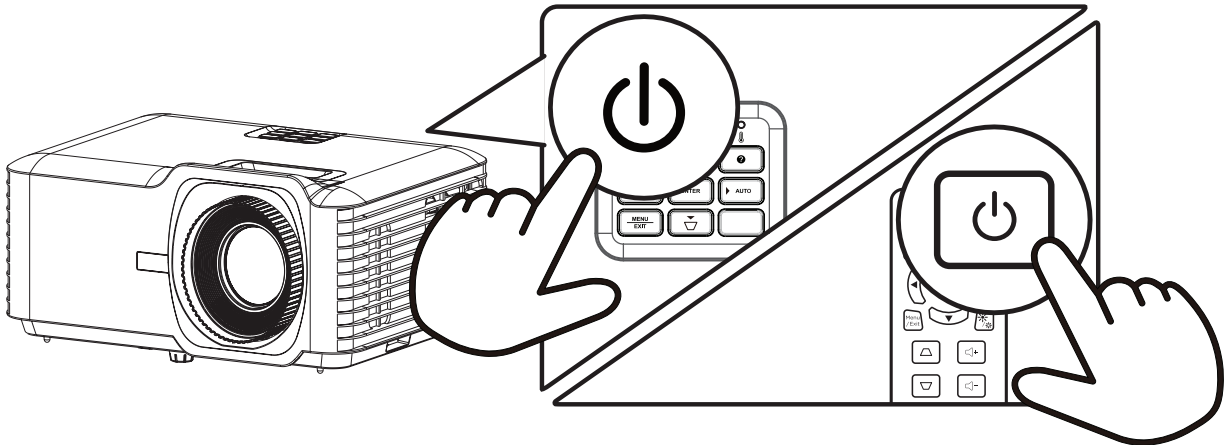

1. Make sure the projector's power cord is connected to a power outlet.
2. Press the **Power** button to turn on the projector. The Power Indicator Light will be flashing blue.

**Note:** If the projector is turned on for the first time or reset to factory defaults, the On-Screen Display Menu's language and projector projection position will need to be set before using the projector.


## Turning the Projector Off

1. Press the **Power** button and a dialog will appear.
2. Press the **Power** button again to confirm and turn off the projector. The Power Indicator Light will be solid red and enter standby mode.

## Selecting an Input Source

The projector supports multiple connections, but can only display one full-screen image at a time. When **Auto Source** is turned on, it automatically detects available inputs. To manually switch between sources, press the **Source** button.


**Note:** Make sure the connected sources are also turned on.

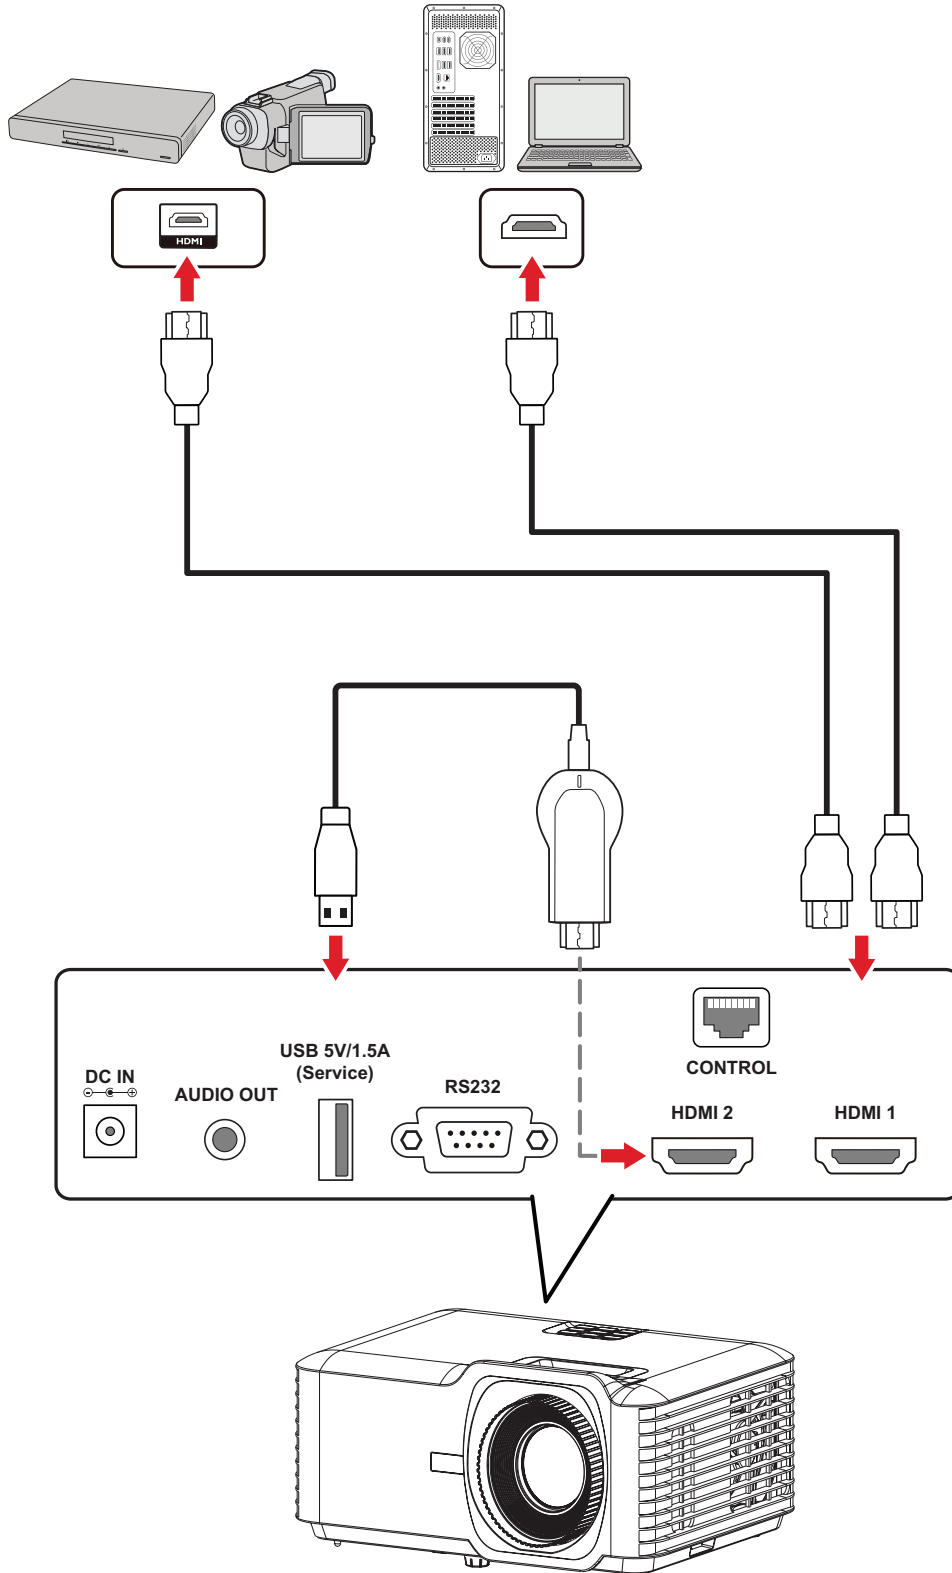

# Adjusting the Projected Image


## Projection Angle

The projector has three adjustable feet. Adjusting the feet will change the projector's projection angle.

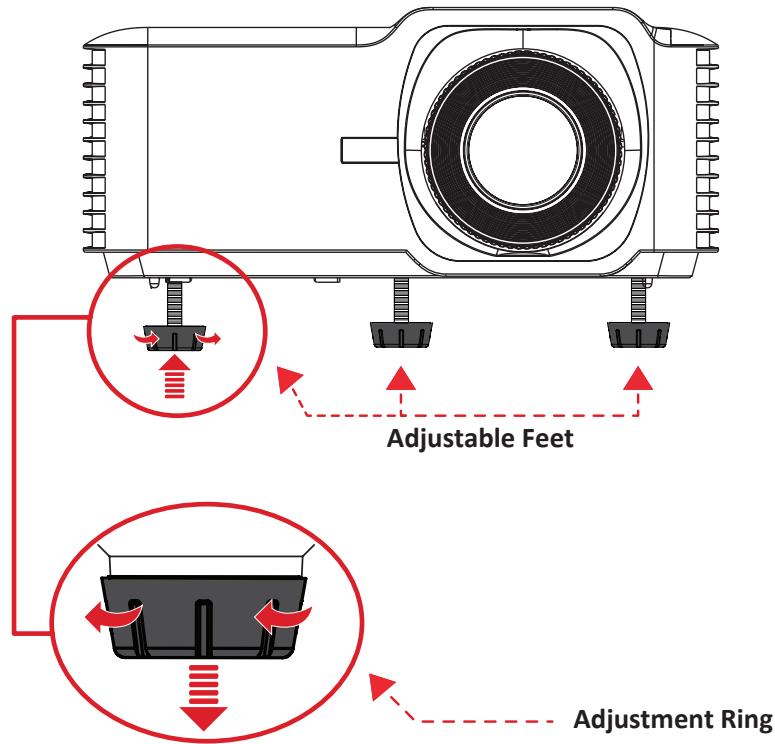



## Image Size and Clarity

To adjust the projected image's size, turn the **Zoom Ring**. Image clarity can be improved by fine-tuning the **Focus Ring**.

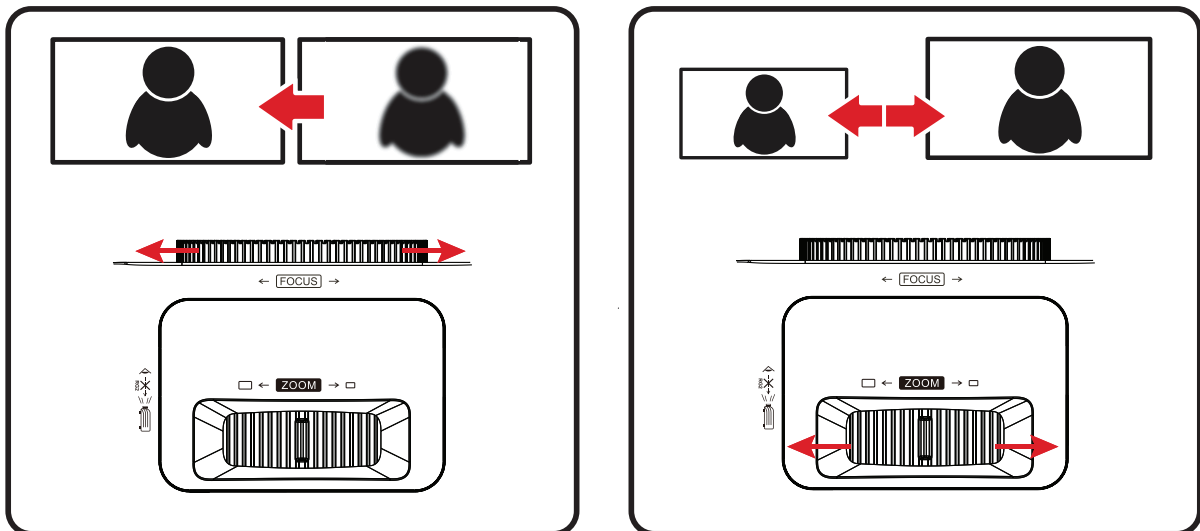



## Correcting Keystone

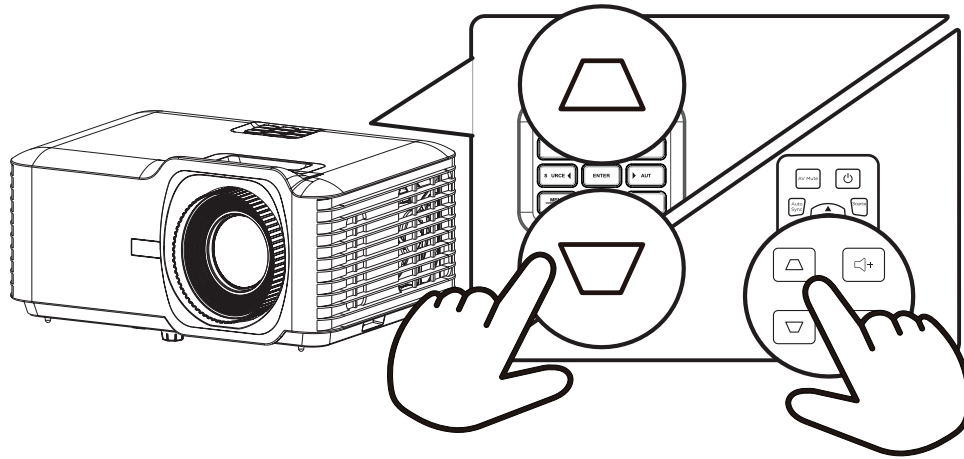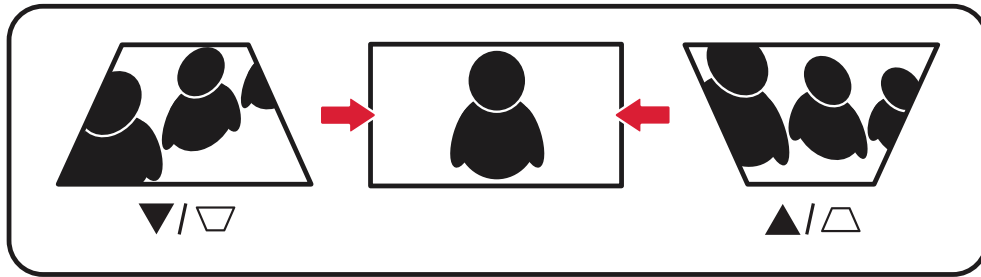The keystone effect causes distorted images on curved surfaces. This can be corrected by aligning images to appear as straight and rectangular.



### To correct keystone


1. Press one of the **Keystone** buttons to display the correction screen.
2. Press the appropriate **Keystone** button for adjustment.

Button	Usage
	Corrects keystone at the bottom of the image.
	Corrects keystone at the top of the image.

# Menu Operation

## On-Screen Display Menu

The projector has on-screen display menus for making image adjustments and changing settings.

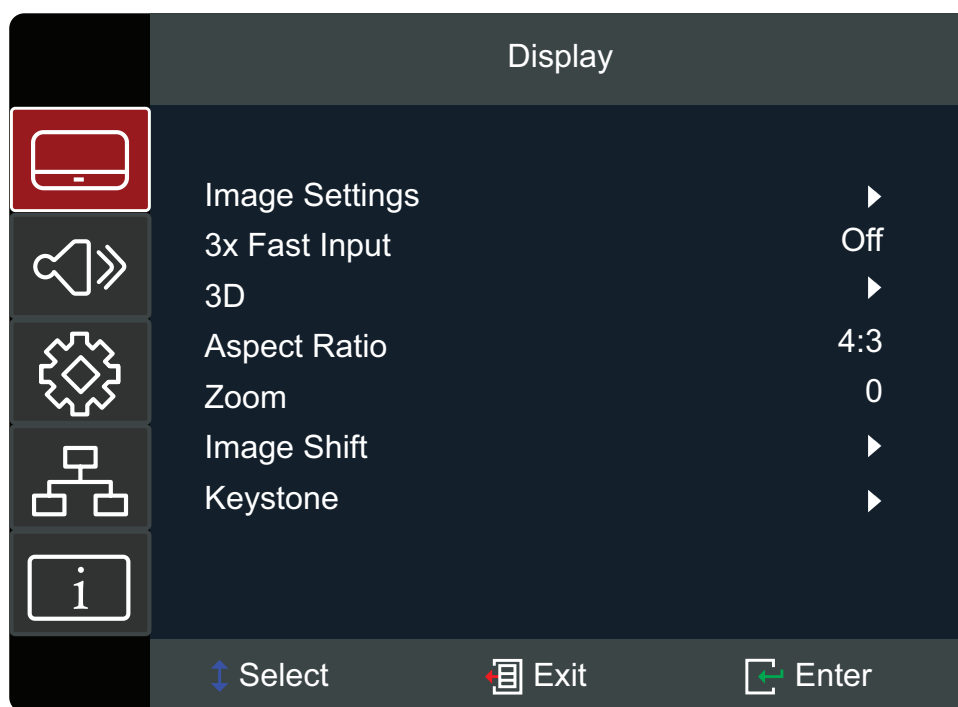

Menu		Description
Display		Adjusts Image, 3D, Aspect Ratio, Zoom, Image Shift, and Keystone settings.
Audio		Adjusts the volume level or mute.
Setup		Adjusts Projection, Power, Security, Language, etc. settings.
Network <sup>1</sup>		Adjusts LAN control settings.
Information		Shows the projector's current status.


<sup>1</sup> – For LSD500HD/V53HD/LS740HD-5/V52HD-5 only.

## Menu Navigation

1. To open the On-Screen Display Menu, press the **Menu/Exit** button on the projector or the remote control.
2. Press the **Navigation** (↑/↓) buttons to select a main menu, then press the **Enter** button to confirm the selection and enter the sub-menu.
3. Press the **Navigation** (↑/↓/←/→) buttons to select an item in the sub-menu, then press the **Enter** button to view further settings or press the **Navigation** (←/→) buttons to make adjustments.
4. To exit the menu, press the **Menu/Exit** button.

# Menu Options

## Display

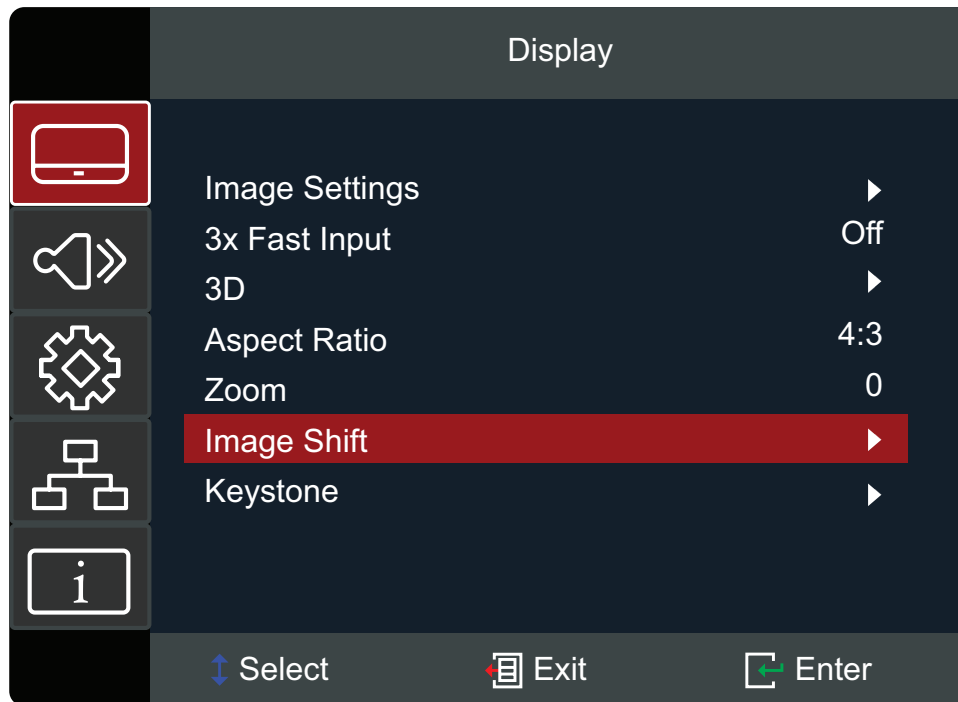

Menu		Description	
Image Settings	Color Mode	Presentation	Meets the presenting demands of professional and academic settings.
		Brightest	Adjusts the projected image's brightness to maximum for well-lit settings.
		HDR SIM. <sup>2</sup>	The projector supports HDR imaging sources. It can automatically detect the dynamic range of the source, and optimize image gamma and color settings to reproduce contents under wide range of light conditions.
		Movie	Provides a balance of detail and colors for watching movies.
		Gaming	Optimizes the projector for maximum contrast and vivid colors.
		3D	Supports 3D content.
		Golf	Meets golf simulator demands.

<sup>2</sup> – For LSD500HD/V53HD/LS740HD-5/V52HD-5 only.


Menu	Description		
<b>Image Settings</b>	Brightness	Adjusts how bright or how dark the projected image will be.	
	Contrast	Adjusts the difference between the brightest and darkest parts of the projected image.	
	Sharpness	Adjusts the projected image's details.	
	Color	Adjusts the amount of the selected color present in the projected image.	
	Tint	Adjusts the amount of the red or green tone in the projected image.	
	Gamma	Adjusts the brightness level of the projector's grayscale levels.	
	Color Settings	Brilliant Color™	A color-processing algorithm that allows for higher brightness levels while providing true, more vibrant colors.
		Color Temperature	Selects a color temperature: Warm, Standard, or Cold.
		Color Management	Fine-tunes the colors ( <b>Hue</b> ), purity ( <b>Saturation</b> ), and brightness/white-temperature ( <b>Gain</b> ) in the projected image.
		Color Space	Selects a color space: Auto, RGB (0–255), RGB (16–235), or YUV.
	Light Source Mode	Dynamic Black	Adjusts the picture brightness automatically to give optimum contrast performance.
		Eco	Reduces light source power consumption by 30% and lowers the brightness level.
		Light Source Power	Sets the light source power consumption manually, 50%–100%.
Reset	Returns the <b>Image Settings</b> settings to their default values.		
<b>3X Fast Input<sup>3</sup></b>	Reduces the input delay/lag to the projector. <b>Note:</b> When turned on, <b>Keystone</b> , <b>Image Shift</b> , <b>Four Corners</b> , <b>Aspect Ratio</b> , and <b>Zoom In/Out</b> will be reset to their default values.		

<sup>3</sup> – For LSD500HD/V53HD/LS740HD-5/V52HD-5 only.

Menu	Description		
<b>3D<sup>4</sup></b>	3D Mode	Turns on or off the 3D function.	
	3D Format	Auto	Selects the appropriate 3D format automatically when a 3D signal is detected.
		SBS	Displays two images side-by-side, one for the left eye and one for the right eye.
		Top and Bottom	Displays the left eye image at the top and the right eye image at the bottom.
		Frame Sequential	Alternates between the left and right eye rapidly.
3D Sync Invert	Inverts the synchronization signal sent by 3D devices.		
<b>Aspect Ratio</b>	4:3	Centers a scaled image on the screen with a fixed 4:3 aspect ratio.	
	16:9	Centers a scaled image on the screen with a fixed 16:9 aspect ratio.	
	Full	Preserves the original resolution of the input signal while resizing it to fit the display area, maintaining its full native dimensions.	
	L.Box	Vertically stretches 2.35:1 content to fill the screen and eliminate black bars for maximum resolution.	
	Auto	Sets the aspect ratio according to the projector's resolution setting and connected input signal.	
<b>Zoom</b>	Adjusts the projected image's size.		
<b>Image Shift</b>	Adjusts the projected image horizontally or vertically.		
<b>Keystone</b>	Four Corners	Adjusts each corner to make a square image when the projection surface is not level.  <b>Note:</b> When adjusting, the <b>Aspect Ratio</b> , <b>Image Shift</b> , and <b>Zoom</b> menus will be turned off. To turn them on, reset the <b>Keystone</b> settings to their default values.	
	H. Keystone	Adjusts image distortion horizontally.	
	V. Keystone	Adjusts image distortion vertically.	
	Reset	Returns the <b>Keystone</b> settings to their default values.	


4– This projector is a 3D ready projector with DLP-Link 3D. Please make sure your 3D glasses are for DLP-Link 3D. This projector supports Blue-ray 3D and frame sequential (page-flip) 3D via the HDMI 1/HDMI 2 ports. For the best performance, 1920 x 1080 resolution is recommended. Please note that 4K (3840 x 2160) resolution is not supported in 3D mode.

## Audio

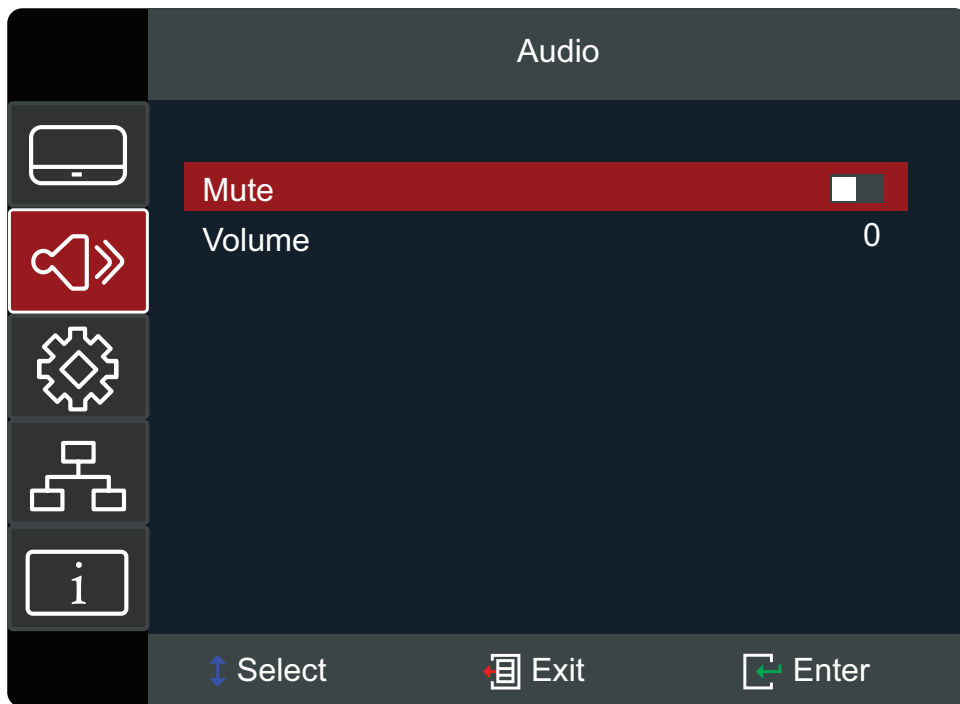

Menu	Description
Mute	Stops audio output.
Volume	Adjusts the volume level.

## Setup

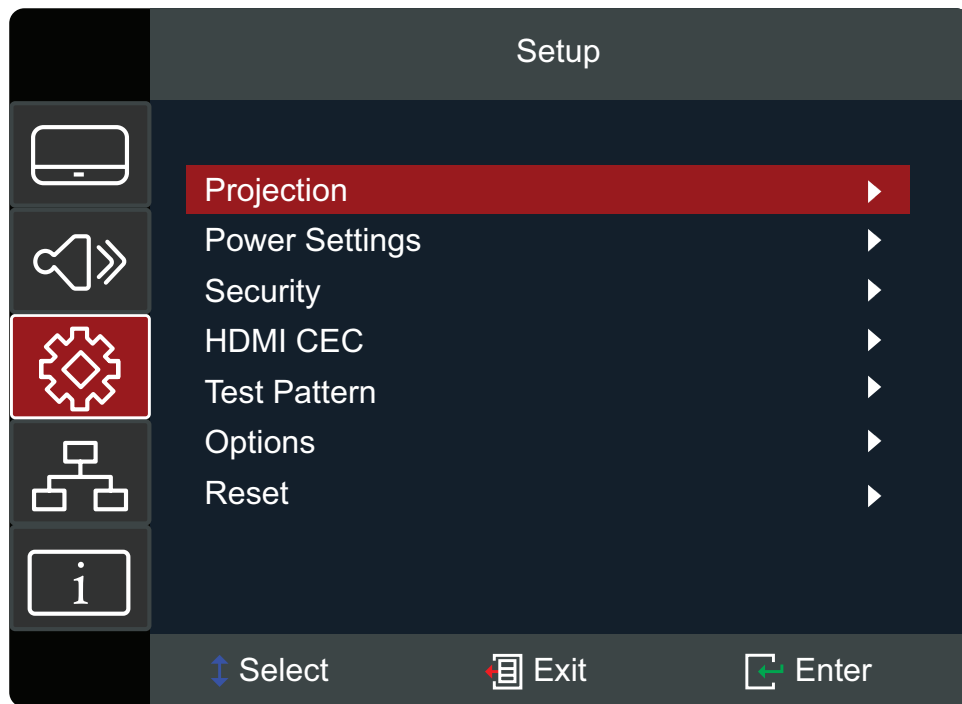

Menu	Description
Projection	Sets the projector position.


Menu	Description		
Power Settings	Direct Power On	Turns on the projector automatically when power is supplied.	
	Signal Power On	Turns on the projector automatically when an input signal is detected.	
	Auto Power Off (min.)	<p>Turns the projector off automatically after a set period of time once no input signal is detected.</p> <p><b>Note:</b> A notification will appear when Auto Power Off (min.) is set to 0 (Disable Auto Power Off) or to a value greater than 20.</p> <div data-bbox="858 629 1441 703" style="border: 1px solid black; padding: 2px;">           COMMISSION REGULATION (EU) 2023/826            Disabling this function will increase energy consumption.         </div>	
	Power Mode <sup>5</sup> (Standby)	Eco	Reduces power consumption to < 0.5W. Network control is not supported.
		Active	Sets power consumption to > 0.5W, allowing the LAN module to enter sleep mode (< 0.5W) within 20 minutes. Wake on LAN (WoL) is not supported.
		ErP Off	Powers network ports continuously, allowing network functionality in standby mode.
		<p><b>Note:</b></p> <ul style="list-style-type: none"> <li>• No power is supplied to the USB port when in standby mode.</li> <li>• To allow network functionality in standby mode, select <b>ErP Off</b>.</li> <li>• A notification will appear when turned off.</li> </ul> <div data-bbox="837 1581 1417 1655" style="border: 1px solid black; padding: 2px;">           COMMISSION REGULATION (EU) 2023/826            Disabling this function will increase energy consumption.         </div>	

<sup>5</sup>– For LSD500HD/V53HD/LS740HD-5/V52HD-5 only.

Menu	Description		
<b>Security</b>	Power On Lock	Sets a password requirement after turning on the projector.	
	Security Timer	Specifies how long the projector can be used. Once this time has expired, the security password will need to be entered again.	
	Change Password	Sets or updates the password.	
<b>HDMI CEC</b>	<p>Turns on or off HDMI CEC-compatible devices connected to the projector with a single button press.</p> <p><b>Note:</b></p> <ul style="list-style-type: none"> <li>• For the CEC function to work, make sure that the device is properly connected to the HDMI input of the projector, and its CEC function is turned on.</li> <li>• Depending on the connected device, the CEC function may not work.</li> </ul>		
<b>Test Pattern</b>	Sets a color pattern to calibrate the projector.		
<b>Options</b>	Language	Sets the language for the On-Screen Display Menu.	
	Auto Source	Searches automatically for an available input signal.	
	High Altitude	When turned on, the fan speed will increase for better cooling and performance. It is recommended for environments 1,500-3,000 m (4,921-9843 ft) above sea level.	
	Keypad Lock	Locks the projector's keypad buttons.	
	Splash Screen	Default	Sets the startup logo image as ViewSonic.
		User	Uses the "splash tool" to change the startup logo image.
Baud Rate	Sets the baud rate to match the connected computer for RS-232 control of the projector.		
<b>Reset</b>	Returns the <b>Setup</b> settings to their default values.		

## Network

**Note:** Only available for the LSD500HD/V53HD/LS740HD-5/V52HD-5 projector.

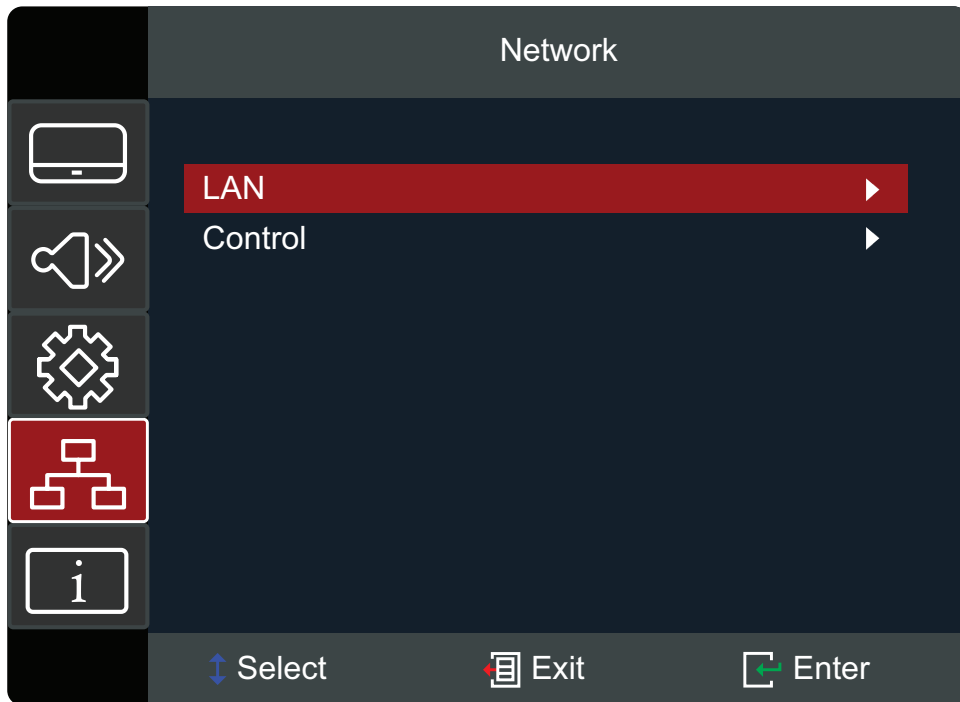


Menu	Description
LAN	Sets the projector's network information and shows its status.
Control	Selects which network control solutions to turn on or off. <div data-bbox="564 1137 1294 1650" style="border: 1px solid black; padding: 5px; margin-top: 10px;"> </div>

## Controlling the Projector through a Network


**Note:** Only available for the LSD500HD/V53HD/LS740HD-5/V52HD-5 projector.

The projector is compatible with network control software and can be controlled remotely by web browser once connected to the same local area network as a computer.

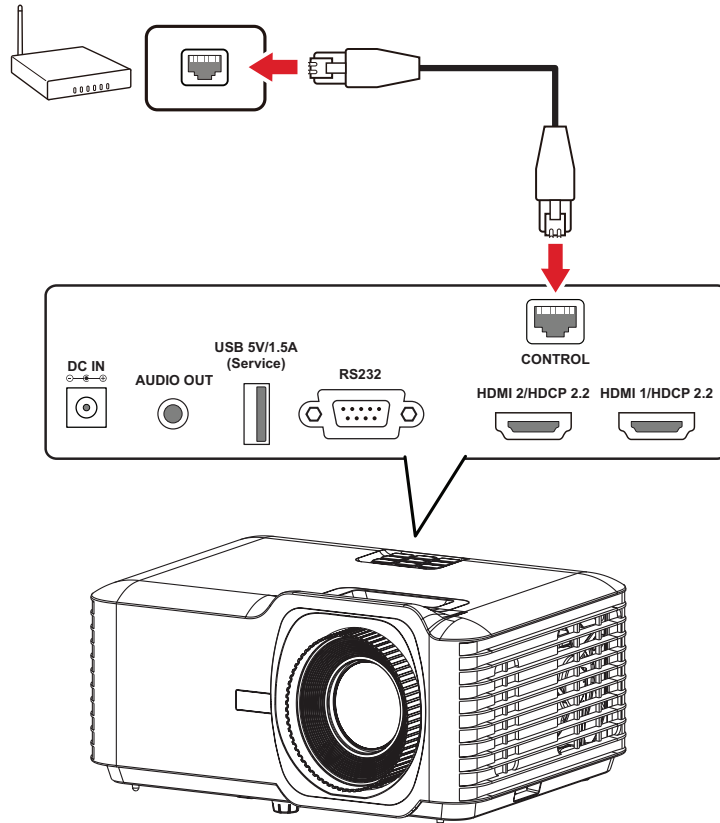

## To control the projector through a network


1. Make sure the projector is connected to the local network via the RJ45 port.
2. Press **Menu/Exit** button to open the On-Screen Display Menu, then navigate to **Network > LAN**.
3. Select **DHCP** and turn it on for automatic IP address assignment, or turn it off to manually enter the network information.
4. Press the **Menu/Exit** button to exit the **LAN** menu.
5. Wait for approximately 20 seconds, then select **LAN** and press the **Enter** button. Make a note of the IP address listed (**IP Address**).

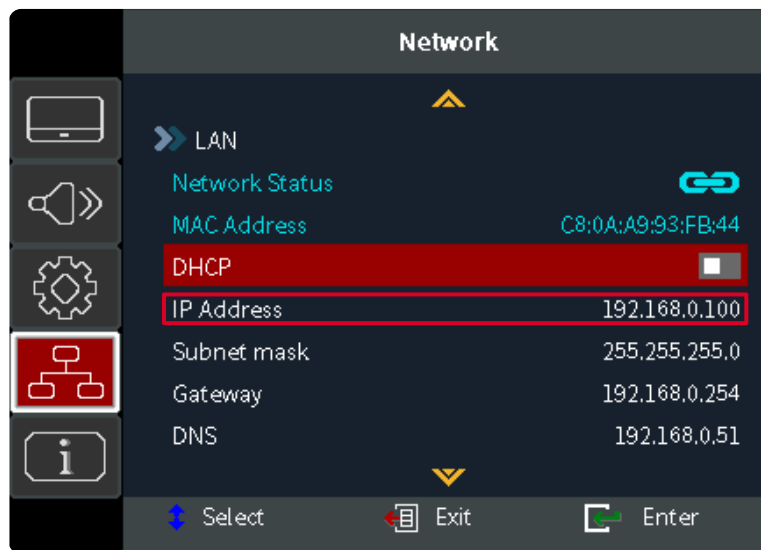

6. Open a web browser on a computer connected to the same network and enter the projector's IP address. Enter the user name and password, then select **Log in**.

**Note:** During your first log in, follow the on-screen instructions to set a password. This will enable subsequent log ins.

## Information

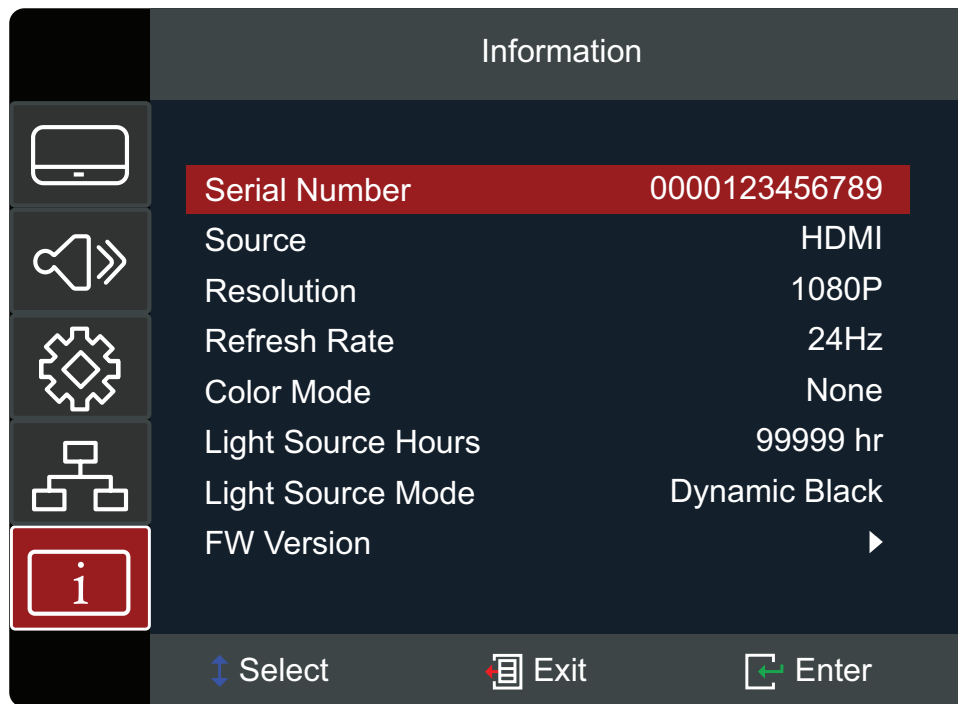

Menu	Description
<b>Serial Number</b>	Shows the projector's serial number.
<b>Source</b>	Shows the current input signal.
<b>Resolution</b>	Shows the current resolution.
<b>Refresh Rate</b>	Shows the current refresh rate.
<b>Color Mode</b>	Shows the selected mode in the <b>Display</b> menu.
<b>Light Source Hours</b>	Shows the total usage hours of the light source.
<b>Light Source Mode</b>	Shows the selected mode in the <b>Display</b> menu.
<b>FW Version</b>	Shows the current firmware version.

# Appendix



## Specifications

Item	Category	Specification	
		LSD500HD/V53HD/ LS740HD-5/ V52HD-5	LSD600W/ LS740W-5
Projector	Type	Laser	
	Display Size	30 in.–300 in.	
	Throw Ratio	1.13–1.47±3% (100 in. @ 2.50 m)	1.18–1.54±3% (100 in. @ 2.54 m)
	Optical Zoom	1.3x	
	Light Source Type	Laser Phosphor	
	Display System	1-CHIP DMD	
Input Signal	HDMI	f <sub>h</sub> : 15–135 kHz, f <sub>v</sub> : 24–120 Hz, Pixel rate: 600 MHz	f <sub>h</sub> : 15–102 kHz, f <sub>v</sub> : 24–120 Hz, Pixel rate: 170 MHz
Resolution	Native	1920 x 1080	1280 x 800
Power	Input Voltage	DC 100-240V, 50/60 Hz (Auto Switch)	
Operating Conditions	Altitude	0 m–762 m at 0°C–40°C	
		0 ft–2,500 ft at 32°F–104°F	
		762 m–1,524 m at 0°C–35°C	
		2,500 ft–5,000 ft at 32°F–95°F	
		1,524 m–3,657.6 m at 0°C–30°C	
		5,000 ft–12,000 ft at 32°F–86°F	
Relative Humidity	10%–80% (non-condensing)		
Temperature	0°C–40°C 32°F–104°F		
Storage Conditions	Altitude	0 km–12.1 km	
		0 ft–40,000 ft	
	Relative Humidity	5%–90% (non-condensing)	
	Temperature	-10°C–60°C 14°F–140°F	
Dimensions	Physical (W x H x D)	286 mm x 129 mm x 216 mm	
		11.26 in. x 5.08 in. x 8.50 in.	
Weight	Physical	2.90 kg	
		6.39 lb	
Power Consumption	On <sup>1</sup>	165W (Typical)	163W (Typical)
	Off	< 0.5W (Standby)	



1 – The test conditions follow EEI standards.

# Projector Dimensions

LSD500HD | V53HD | LS740HD-5 | V52HD-5

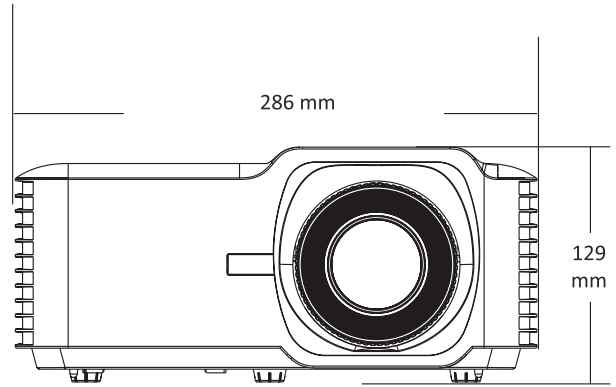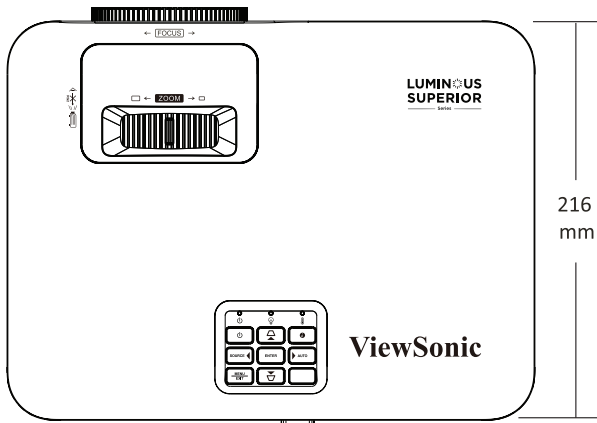

LSD600W | LS740W-5

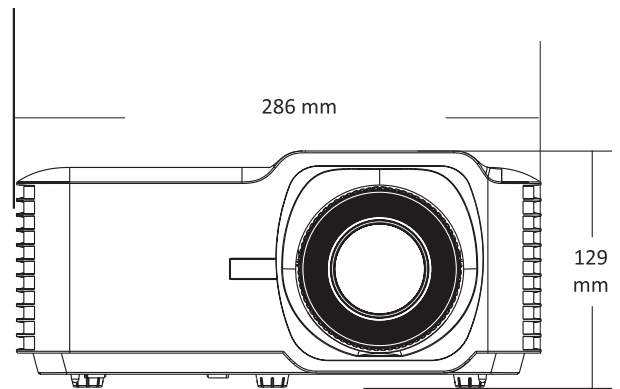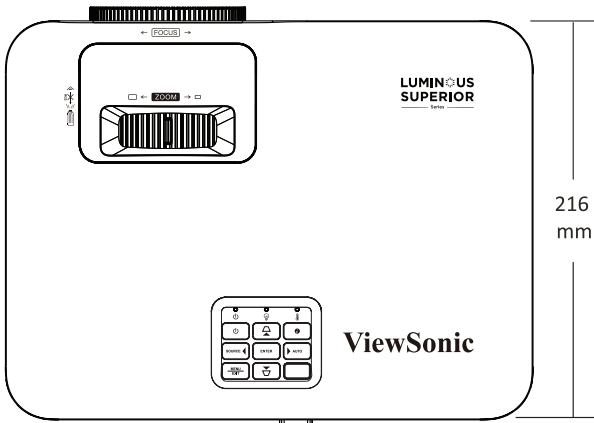

# On-Screen Display Menu Tree

Main Menu	Sub-menu	Menu Option				
Display	Image Settings	Color Mode	Presentation			
			Brightest			
			HDR SIM. <sup>2</sup>			
			Movie			
			Gaming			
			3D			
			Golf			
		Brightness	(-/+ , -50–50)/1			
		Contrast	(-/+ , -50–50)/1			
		Sharpness	(-/+ , 1–15)/1			
		Color	(-/+ , -50–50)/1			
		Tint	(-/+ , -50–50)/1			
		Gamma	Film			
			Video			
			Graphics			
			Standard (2.2)			
		Color Settings	Brilliant Color™		(-/+ , 1–10)/1	
					Color Temperature	Warm
						Standard
			Cold			
			Color Management		Color	Red
						Green
						Blue
						Cyan
						Yellow
						Magenta
						White
Hue/R	(-/+ , -50–50)/1					
Saturation/G	(-/+ , -50–50)/1					
Gain/B	(-/+ , -50–50)/1					
Reset						
Exit						

<sup>2</sup> – For LSD500HD/V53HD/LS740HD-5/V52HD-5 only.

Main Menu	Sub-menu	Menu Option			
Display	Image Settings	Color Settings	Color Space	Auto	
				RGB (0–255)	
				RGB (16–235)	
				YUV	
		Light Source Mode	Dynamic Black		
			Eco		
			Light Source Power 100%–50%		
		Reset			
		3X Fast Input <sup>3</sup>	Active		
			Inactive		
	3D	3D Mode	Off		
			On		
		3D Format	Auto		
			SBS		
			Top and Bottom		
		3D Sync Invert	Frame Sequential		
			Off		
	On				
	Aspect Ratio	4:3			
		16:9			
		Full			
		L.Box			
		Auto			
	Zoom	(-/+ , -5–25)/1			
	Keystone	Four Corners	Top-Left		
			Top-Right		
			Bottom-Left		
Bottom-Right					
H. Keystone		(-/+ , -30–30)/1			
V. Keystone		(-/+ , -30–30)/1			
Reset					

<sup>3</sup> – For LSD500HD/V53HD/LS740HD-5/V52HD-5 only.

Main Menu	Sub-menu	Menu Option		
Audio	Mute	Off		
		On		
	Volume	(-/+, 0–10)/1		
Setup	Projection	Front		
		Rear		
		Ceiling-Top		
		Rear-Top		
	Power Settings	Direct Power	Off	
			On	
		Signal Power	Off	
			On	
		Auto Power Off (min.)	(-/+, 0–180)/5 minutes	
		Power Mode (Standby) <sup>4</sup>	Eco	
			Active	
	ErP Off			
	Security	Power On Lock	Off	
			On	
		Security Timer	Month	
			Day	
Hour				
Change Password				

<sup>4</sup>– For LSD500HD/V53HD/LS740HD-5/V52HD-5 only.

Main Menu	Sub-menu	Menu Option	
Setup	HDMI CEC	HDMI CEC	Off
			On
	Test Pattern	Test Pattern	Off
			Green Grid
			Magenta Grid
			White Grid
			White
			Test Card
			Options
	Deutsch		
	Français		
	Italiano		
	Español		
	Português		
	Polski		
	Nederlands		
	Svenska		
	Norsk		
	Suomi		
	ελληνικά		
	繁體中文		
	簡體中文		
	日本語		
	한국어		
	Русский		
	Čeština		
	عربى		
	ไทย		
	Türkçe		
	Tiếng Việt		
	Bahasa Indonesia		

Main Menu	Sub-menu	Menu Option	
Setup	Options	Auto Source	Off
			On
		High Altitude	Off
			On
		Keypad Lock	Off
			On
		Splash Screen	Default
			User
	Baud Rate	115200	
		9600	
Reset	Reset to Default		
Network <sup>5</sup>	LAN	Network Status	
		MAC Address	
		DHCP	Off
			On
		IP Address	xxx.xxx.xxx
		Subnet Mask	xxx.xxx.xxx
		Gateway	xxx.xxx.xxx
		DNS	xxx.xxx.xxx
	Reset		
	Control	Crestron	Off
			On
		Extron	Off
			On
		PJ Link	Off
			On
		AMX Device Discovery	Off
			On
		Telnet	Off
On			
HTTP	Off		
	On		

<sup>5</sup> – For LSD500HD/V53HD/LS740HD-5/V52HD-5 only.

Main Menu	Sub-menu	Menu Option		
<b>Information</b>	Serial Number			
	Source			
	Resolution			
	Refresh Rate			
	Color Mode			
	Light Source Hours			
	Light Source Mode			
	FW Version	System		
		LAN <sup>6</sup>		
		MCU		

<sup>6</sup> – For LSD500HD/V53HD/LS740HD-5/V52HD-5 only.

# Supported Resolutions and Timings

## HDMI 1 | HDMI 2

### PC Signal

Signal	Resolution	Refresh Rate	
		LSD500HD/V53HD/ LS740HD-5/V52HD-5	LSD600W/LS740W-5
VGA	640 x 480	60, 72, 75 Hz	60, 67, 72, 75 Hz
	720 x 400	70 Hz	70 Hz
SVGA	800 x 600	56, 60, 72, 75 Hz	56, 60, 72, 75 Hz
	832 x 624	75 Hz	75 Hz
XGA	1024 x 768	60, 70, 75, 120 Hz	60, 70, 75 Hz
	1152 x 864	75 Hz	N/A
PowerBook G4	1152 x 870	75 Hz	75 Hz
WXGA	1280 x 720	60,120 Hz	60, 120 Hz
	1280 x 800	60 Hz	60 Hz
	1440 x 900	60 Hz	60 Hz
QuadVGA	1280 x 960	60 Hz	60 Hz
SXGA	1280 x 1024	60,75 Hz	60, 75 Hz
	1400 x 1050	60 Hz	N/A
UXGA	1600 x 1200	60 Hz	N/A
WSXGA+	1680 x 1050	60 Hz	60 Hz
	1920 x 1080	60 Hz	60 Hz

### Video Signal

Signal	Resolution	Refresh Rate	
		LSD500HD/V53HD/ LS740HD-5/V52HD-5	LSD600W/LS740W-5
SDTV (480i)	720 x 480	60 Hz	60 Hz
SDTV (480p)	720 x 480	60 Hz	60 Hz
SDTV (576i)	720 x 576	50 Hz	50 Hz
SDTV (576i)	720 x 576	50 Hz	50 Hz
HDTV (720p)	1280 x 720	50, 60 Hz	50, 60 Hz
HDTV (1080i)	1920 x 1080	50, 60 Hz	50, 60 Hz
HDTV (1080p)	1920 x 1080	24, 25, 30, 50 ,60, 120 Hz	24, 50, 60 Hz
UHD (2160p)	3840 x 2160	24, 25, 30, 50 ,60 Hz	N/A
	4096 x 2160	24, 25, 30, 50 ,60 Hz	N/A

## 3D

Signal	Resolution	Refresh Rate
<b>Frame Packing</b>		
720p	1280 X 720	50, 60 Hz
1080p	1920 X 1080	24 Hz
<b>Side-by-Side</b>		
1080i	1920 x 1080	50, 60 Hz
<b>Top-and-Bottom</b>		
720p	1280 x 720	50, 60 Hz
1080p	1920 x 1080	24 Hz

### Note:

- 1080i @ 25 Hz and 720p @ 50 Hz will run in 100 Hz; other 3D timing will run in 120 Hz.
- 1080p @24 Hz will run in 144 Hz (XGA, WXGA, 1080p)/96 Hz (WUXGA).
- If the input frame rate is 48 Hz or greater, the output frame rate is set to twice the input frame rate (FRC = 2X mode).
- If the 3D input frame rate is 25 Hz or greater, the output frame rate is set to four times the input frame rate (FRC = 4X mode).
- If the 3D input frame rate is 24 Hz (includes 23.9 Hz), the output frame rate is set to six times the input frame rate (FRC = 6X mode).

# Troubleshooting

## Projector does not turn on

Troubleshooting Checks	Yes/No	Possible Solutions
Is the Power Indicator lit?	Yes	Turn the projector off, then turn it back on.
	No	Check the power connection between the projector and the power outlet.
Is the power cord plugged into a power outlet?	Yes	Try another Power outlet or use some other electrical device to confirm the same power outlet is working.
	No	Plug the power cord into a power outlet and press the <b>Power</b> button on the projector's keypad or remote control.

## No image appears

Troubleshooting Checks	Yes/No	Possible Solutions
Is your PC/video device turned on or in sleep mode?	Yes	Check the cable connection between your PC/video device and the projector.
	No	Turn your PC/video device on or wake it up from sleep mode. If in any doubts, consult your PC/video device's documentation.
Is the image input selected correctly?	Yes	Turn the projector off, then turn it back on.
	No	Select the correct input source. If multiple devices are connected, manually adjust the input source by pressing the Source Input button on the projector's keypad or remote control.

## Image is flipped upside down or mirrored left to right

Troubleshooting Checks	Yes/No	Possible Solutions
Is the projector hung from the ceiling?	Yes	Check the <b>Ceiling-Top/Rear-Top</b> option.
	No	Turn the projector off, then turn it back on.
Is the projector placed on a desk/floor?	Yes	Check the <b>Front/Rear</b> option.
	No	Turn the projector off, then turn it back on.

## Image is blurred

Troubleshooting Checks	Yes/No	Possible Solutions
Is the lens dirty?	Yes	Follow the procedure in the Maintenance section to clean the lens.
	No	Adjust the <b>Focus Ring</b> until the image is clear.

## Image is not displayed correctly

Troubleshooting Checks	Yes/No	Possible Solutions
Is the image cut off, or not fitting on the screen?	Yes	Press the <b>Zoom In/Zoom Out</b> button on the remote control to return to the original image size.  If the image is still not displayed correctly, reset the <b>Image Settings</b> .
	No	Reset the <b>Image Settings</b> .

## Remote control does not work

Troubleshooting Checks	Yes/No	Possible Solutions
Are there any obstacles between the remote control and projector?	Yes	Remove the obstacle(s).
	No	Aim the remote control at the projector's IR receiver within the effective distance and angles when performing an operation.  Related sections: <ul style="list-style-type: none"> <li>"Receiver Range"</li> </ul>
Are the batteries installed correctly?	Yes	If the remote control still does not work, try another set of new batteries to confirm the current batteries have power.
	No	Install the batteries again.  Related sections: <ul style="list-style-type: none"> <li>"Installing the Batteries"</li> </ul>




## **Important**

If a problem is still not solved or not listed here, follow the steps below to restart your projector.

- 1.** Press the **Power** button on the projector's keypad or remote control to turn it off.
- 2.** Unplug the power cord from the power outlet and wait for at least five minutes.
- 3.** Plug the power cord back in.
- 4.** Press the **Power** button to turn on the projector.

If normal operation does not resume after the projector restarts, contact your reseller or service center for assistance.

## LED Indicators

Status and Description				
	Red	Blue	Red	Red
Standby State (Power Cord Input)	Steady			
Power On (Warming)		Flashing (0.5 sec. off/0.5 sec. on)		
Power On and Lamp Lighting		Steady		
Power Off (Cooling)	Flashing (0.5 sec. off/0.5 sec. on) Back to Steady after the cooling fan turns off			
Error (Lamp Failure)	Flashing			Steady
Error (Fan Failure)	Flashing		Flashing	
Error (Overheat)	Flashing		Steady	

**Note:** If normal operation does not resume, contact your reseller or service center for assistance.

# Maintenance

## General Precautions

- Before performing any maintenance, turn off the projector and unplug the power cord from the outlet.
- Do not spray or pour liquid directly onto the projector.
- Handle the projector with care, as scratches may be more visible on dark-colored models.

## Cleaning the Lens

- Use an air blower to remove dust.
- Use lens-cleaning paper or a soft, moist cloth with lens cleaner to gently wipe away smudges from the lenses.

**Important:** Do not use abrasive materials or glass cleaner to clean the lens.

## Cleaning the Case

- Clean with a soft, dry cloth.
- If the case is still not clean, apply a small amount of non-ammonia, non-alcohol based, mild non-abrasive detergent onto a clean, soft, lint-free cloth; then wipe the surface.

**Important:** Do not use wax, alcohol, benzene, thinner, or other chemical detergents for cleaning.

## Storing the Projector

If the projector will not be used for an extended period of time, observe the following:

- Retract the adjustable foot completely.
- Remove the batteries from the remote control.
- Pack the projector in its original packaging.
- Store the projector in a location that falls within the projector's storage conditions.

## Disclaimer

- ViewSonic® does not recommend the use of any ammonia or alcohol-based cleaners on the lens or case. Some chemical cleaners have been reported to damage the lens and/or case of the projector.
- ViewSonic® will not be liable for damage resulting from use of any ammonia or alcohol-based cleaners.

# Regulatory and Service Information

## Compliance Information

This section addresses all connected requirements and statements regarding regulations. Confirmed corresponding applications shall refer to nameplate labels and relevant markings on the unit.

### FCC Compliance Statement

This device complies with part 15 of FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**Warning:** You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

### Industry Canada Statement

This Class B digital apparatus complies with Canadian ICES-003.


Cet appareil numérique de classe B est conforme à la norme NMB-003 du Canada.  
CAN ICES (B)/NMB (B)

## CE Conformity for European Countries

**CE** The device complies with the EMC Directive 2014/30/EU and Low Voltage Directive 2014/35/EU. Ecodesign Directive 2009/125/EC.

### **The following information is only for EU-member states:**

The mark shown to the right is in compliance with the Waste Electrical and Electronic Equipment Directive 2012/19/EU (WEEE). The mark indicates the requirement NOT to dispose of the equipment as unsorted municipal waste, but use the return and collection systems according to local law.



## Declaration of RoHS2 Compliance

This product has been designed and manufactured in compliance with Directive 2011/65/EU of the European Parliament and the Council on restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS2 Directive) and is deemed to comply with the maximum concentration values issued by the European Technical Adaptation Committee (TAC) as shown below:

Substance	Proposed Maximum Concentration	Actual Concentration
Lead (Pb)	0.1%	< 0.1%
Mercury (Hg)	0.1%	< 0.1%
Cadmium (Cd)	0.01%	< 0.01%
Hexavalent Chromium (Cr6 <sup>+</sup> )	0.1%	< 0.1%
Polybrominated biphenyls (PBB)	0.1%	< 0.1%
Polybrominated diphenyl ethers (PBDE)	0.1%	< 0.1%
Bis (2-ethylhexyl) phthalate (DEHP)	0.1%	< 0.1%
Butyl benzyl phthalate (BBP)	0.1%	< 0.1%
Dibutyl phthalate (DBP)	0.1%	< 0.1%
Diisobutyl phthalate (DIBP)	0.1%	< 0.1%

**Certain components of products as stated above are exempted under the Annex III of the RoHS2 Directives as noted below. Examples of exempted components are:**

- Mercury in cold cathode fluorescent lamps and external electrode fluorescent lamps (CCFL and EEFL) for special purposes not exceeding (per lamp):
  - » Short length (500 mm): maximum 3.5 mg per lamp.
  - » Medium length (> 500 mm and 1,500 mm): maximum 5 mg per lamp.
  - » Long length (> 1,500 mm): maximum 13 mg per lamp.
- Lead in glass of cathode ray tubes.
- Lead in glass of fluorescent tubes not exceeding 0.2% by weight.
- Lead as an alloying element in aluminum containing up to 0.4% lead by weight.
- Copper alloy containing up to 4% lead by weight.
- Lead in high melting temperature type solders (i.e. lead-based alloys containing 85% by weight or more lead).
- Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezoelectronic devices, or in a glass or ceramic matrix compound.

## Indian Restriction of Hazardous Substances

Restriction on Hazardous Substances statement (India). This product complies with the “India E-waste Rule 2011” and prohibits use of lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers in concentrations exceeding 0.1 weight % and 0.01 weight % for cadmium, except for the exemptions set in Schedule 2 of the Rule.

## Product Disposal at End of Product Life

ViewSonic® respects the environment and is committed to working and living green. Thank you for being part of Smarter, Greener Computing. Please visit the ViewSonic® website to learn more.

### USA & Canada:

<https://www.viewsonic.com/us/go-green-with-viewsonic>

### Europe:

<https://www.viewsonic.com/eu/environmental-social-governance/recycle>

### Taiwan:

<https://recycle.moenv.gov.tw/>

**For EU users, please contact us for any safety/accident issue experienced with this product:**

ViewSonic Europe Limited



Haaksbergweg 75  
1101 BR Amsterdam  
Netherlands



+31 (0) 650608655



[EPREL@viewsoniceurope.com](mailto:EPREL@viewsoniceurope.com)



<https://www.viewsonic.com/eu/>

## Copyright Information

Copyright© ViewSonic® Corporation, 2025. All rights reserved.

Macintosh and Power Macintosh are registered trademarks of Apple Inc.

Microsoft, Windows, and the Windows logo are registered trademarks of Microsoft Corporation in the United States and other countries.

ViewSonic® and the three birds logo are registered trademarks of ViewSonic® Corporation.

VESA is a registered trademark of the Video Electronics Standards Association. DPMS, DisplayPort, and DDC are trademarks of VESA.

ENERGY STAR® is a registered trademark of the U.S. Environmental Protection Agency (EPA).

As an ENERGY STAR® partner, ViewSonic® Corporation has determined that this product meets the ENERGY STAR® guidelines for energy efficiency.

**Disclaimer:** ViewSonic® Corporation shall not be liable for technical or editorial errors or omissions contained herein; nor for incidental or consequential damages resulting from furnishing this material, or the performance or use of this product.

In the interest of continuing product improvement, ViewSonic® Corporation reserves the right to change product specifications without notice. Information in this document may change without notice.

No part of this document may be copied, reproduced, or transmitted by any means, for any purpose without prior written permission from ViewSonic® Corporation.

## Customer Service

For technical support or product service, see the table below or contact your reseller.

**Note:** You will need the product's serial number.

Country/ Region	Website	Country/ Region	Website
<b>Asia Pacific &amp; Africa</b>			
Australia	<a href="http://www.viewsonic.com/au/">www.viewsonic.com/au/</a>	Bangladesh	<a href="http://www.viewsonic.com/bd/">www.viewsonic.com/bd/</a>
中国 (China)	<a href="http://www.viewsonic.com.cn">www.viewsonic.com.cn</a>	香港 (繁體中文)	<a href="http://www.viewsonic.com/hk/">www.viewsonic.com/hk/</a>
Hong Kong (English)	<a href="http://www.viewsonic.com/hk-en/">www.viewsonic.com/hk-en/</a>	India	<a href="http://www.viewsonic.com/in/">www.viewsonic.com/in/</a>
Indonesia	<a href="http://www.viewsonic.com/id/">www.viewsonic.com/id/</a>	Israel	<a href="http://www.viewsonic.com/il/">www.viewsonic.com/il/</a>
日本 (Japan)	<a href="http://www.viewsonic.com/jp/">www.viewsonic.com/jp/</a>	Korea	<a href="http://www.viewsonic.com/kr/">www.viewsonic.com/kr/</a>
Malaysia	<a href="http://www.viewsonic.com/my/">www.viewsonic.com/my/</a>	Middle East	<a href="http://www.viewsonic.com/me/">www.viewsonic.com/me/</a>
Myanmar	<a href="http://www.viewsonic.com/mm/">www.viewsonic.com/mm/</a>	Nepal	<a href="http://www.viewsonic.com/np/">www.viewsonic.com/np/</a>
New Zealand	<a href="http://www.viewsonic.com/nz/">www.viewsonic.com/nz/</a>	Pakistan	<a href="http://www.viewsonic.com/pk/">www.viewsonic.com/pk/</a>
Philippines	<a href="http://www.viewsonic.com/ph/">www.viewsonic.com/ph/</a>	Singapore	<a href="http://www.viewsonic.com/sg/">www.viewsonic.com/sg/</a>
臺灣 (Taiwan)	<a href="http://www.viewsonic.com/tw/">www.viewsonic.com/tw/</a>	ประเทศไทย	<a href="http://www.viewsonic.com/th/">www.viewsonic.com/th/</a>
Việt Nam	<a href="http://www.viewsonic.com/vn/">www.viewsonic.com/vn/</a>	South Africa & Mauritius	<a href="http://www.viewsonic.com/za/">www.viewsonic.com/za/</a>
<b>Americas</b>			
United States	<a href="http://www.viewsonic.com/us">www.viewsonic.com/us</a>	Canada	<a href="http://www.viewsonic.com/us">www.viewsonic.com/us</a>
Latin America	<a href="http://www.viewsonic.com/la">www.viewsonic.com/la</a>		
<b>Europe</b>			
Europe	<a href="http://www.viewsonic.com/eu/">www.viewsonic.com/eu/</a>	France	<a href="http://www.viewsonic.com/fr/">www.viewsonic.com/fr/</a>
Deutschland	<a href="http://www.viewsonic.com/de/">www.viewsonic.com/de/</a>	Қазақстан	<a href="http://www.viewsonic.com/kz/">www.viewsonic.com/kz/</a>
Россия	<a href="http://www.viewsonic.com/ru/">www.viewsonic.com/ru/</a>	España	<a href="http://www.viewsonic.com/es/">www.viewsonic.com/es/</a>
Türkiye	<a href="http://www.viewsonic.com/tr/">www.viewsonic.com/tr/</a>	Україна	<a href="http://www.viewsonic.com/ua/">www.viewsonic.com/ua/</a>
United Kingdom	<a href="http://www.viewsonic.com/uk/">www.viewsonic.com/uk/</a>		

## Limited Warranty

### ViewSonic® Projector

#### **What the warranty covers:**

ViewSonic® warrants its products to be free from defects in material and workmanship, under normal use, during the warranty period. If a product proves to be defective in material or workmanship during the warranty period, ViewSonic® will, at its sole option, repair or replace the product with a like product. Replacement product or parts may include remanufactured or refurbished parts or components.

#### **Limited Three (3) year General Warranty:**

Subject to the more limited one (1) year warranty set out below, North and South America: Three (3) years warranty for all parts excluding the lamp, three (3) years for labor, and one (1) year for the original lamp from the date of the first consumer purchase.

Other regions or countries: Please check with your local dealer or local ViewSonic® office for the warranty information.

#### **Limited One (1) year Heavy Usage Warranty:**

Under heavy usage settings, where a projector's use includes more than fourteen (14) hours average daily usage, North and South America: One (1) year warranty for all parts excluding the lamp, one (1) year for labor, and ninety (90) days for the original lamp from the date of the first consumer purchase; Europe: One (1) year warranty for all parts excluding the lamp, one (1) year for labor, and ninety (90) days for the original lamp from the date of the first consumer purchase. Other regions or countries: Please check with your local dealer or local ViewSonic® office for the warranty information. Lamp warranty subject to terms and conditions, verification and approval. Applies to manufacturer's installed lamp only. All accessory lamps purchased separately are warranted for 90 days.

#### **Who the warranty protects:**

This warranty is valid only for the first consumer purchaser.

## **What the warranty does not cover:**

1. Any product on which the serial number has been defaced, modified, or removed.
2. Damage, deterioration, or malfunction resulting from:
  - » Accident, misuse, neglect, fire, water, lightning, or other acts of nature, unauthorized product modification, or failure to follow instructions supplied with the product.
  - » Operation outside of product specifications.
  - » Operation of the product for other than the normal intended use or not under normal conditions.
  - » Repair or attempted repair by anyone not authorized by ViewSonic®.
  - » Any damage of the product due to shipment.
  - » Removal or installation of the product.
  - » Causes external to the product, such as electric power fluctuations or failure.
  - » Use of supplies or parts not meeting Viewsonic's specifications.
  - » Normal wear and tear.
  - » Any other cause which does not relate to a product defect.
3. Removal, installation, and set-up service charges.

## **How to get service:**

1. For information about receiving service under warranty, contact ViewSonic® Customer Support (Please refer to the "Customer Support" page). You will need to provide your product's serial number.
2. To obtain warranted service, you will be required to provide: (a) the original dated sales slip, (b) your name, (c) your address, (d) a description of the problem, and (e) the serial number of the product.
3. Take or ship the product, freight prepaid, in the original container to an authorized ViewSonic® service center or ViewSonic®.
4. For additional information or the name of the nearest ViewSonic® service center, contact ViewSonic®.

## **Limitation of implied warranties:**

There are no warranties, express or implied, which extend beyond the description contained herein including the implied warranty of merchantability and fitness for a particular purpose.

**Exclusion of damages:**

ViewSonic's liability is limited to the cost of repair or replacement of the product. ViewSonic® shall not be liable for:

1. Damage to other property caused by any defects in the product, damages based upon inconvenience, loss of use of the product, loss of time, loss of profits, loss of business opportunity, loss of goodwill, interference with business relationships, or other commercial loss, even if advised of the possibility of such damages.
2. Any other damages, whether incidental, consequential or otherwise.
3. Any claim against the customer by any other party.

**Effect of state law:**

This warranty gives you specific legal rights, and you may also have other rights which vary from local authority. Some local governments do not allow limitations on implied warranties and/or do not allow the exclusion of incidental or consequential damages, so the above limitations and exclusions may not apply to you.

**Sales outside the U.S.A. and Canada:**

For warranty information and service on ViewSonic® products sold outside of the U.S.A. and Canada, contact ViewSonic® or your local ViewSonic® dealer.

The warranty period for this product in mainland China (Hong Kong, Macao, and Taiwan Excluded) is subject to the terms and conditions of the Maintenance Guarantee Card.

For users in Europe and Russia, full details of warranty provided can be found at: <http://www.viewsonic.com/eu/> under "Support/Warranty Information".

# Mexico Limited Warranty

## ViewSonic® Projector

### **What the warranty covers:**

ViewSonic® warrants its products to be free from defects in material and workmanship, under normal use, during the warranty period. If a product proves to be defective in material or workmanship during the warranty period, ViewSonic® will, at its sole option, repair or replace the product with a like product. Replacement product or parts may include remanufactured or refurbished parts or components & accessories.

### **How long the warranty is effective:**

3 years for all parts excluding the lamp, 3 years for labor, 1 year for the original lamp from the date of the first consumer purchase.

Lamp warranty subject to terms and conditions, verification and approval. Applies to manufacturer's installed lamp only.

All accessory lamps purchased separately are warranted for 90 days.

### **Who the warranty protects:**

This warranty is valid only for the first consumer purchaser.

### **What the warranty excludes and does not cover:**

1. Any product on which the serial number has been defaced, modified or removed.
2. Damage, deterioration, or malfunction resulting from:
  - » Accident, misuse, neglect, fire, water, lightning, or other acts of nature, unauthorized product modification, unauthorized attempted repair, or failure to follow instructions supplied with the product.
  - » Any damage of the product due to shipment.
  - » Causes external to the product, such as electrical power fluctuations or failure.
  - » Use of supplies or parts not meeting ViewSonic®'s specifications.
  - » Normal wear and tear.
  - » Any other cause which does not relate to a product defect.
3. Any product exhibiting a condition commonly known as "image burn-in" which results when a static image is displayed on the product for an extended period of time.
4. Removal, installation, insurance, and set-up service charges.

## How to get service:

For information about receiving service under warranty, contact ViewSonic® Customer Support (Please refer to the attached “Customer Service” page). You will need to provide your product’s serial number, so please record the product information in the space provided below on your purchase for your future use. Please retain your receipt of proof of purchase to support your warranty claim.

## For Your Records

Product Name: \_\_\_\_\_ Model Number: \_\_\_\_\_

Document Number: \_\_\_\_\_ Serial Number: \_\_\_\_\_

Purchase Date: \_\_\_\_\_ Extended Warranty Purchase? \_\_\_\_\_ (Y/N)

If so, what date does warranty expire? \_\_\_\_\_

1. To obtain warranty service, you will be required to provide (a) the original dated sales slip, (b) your name, (c) your address, (d) a description of the problem, and (e) the serial number of the product.
2. Take or ship the product, in the original container packaging, to an authorized ViewSonic® service center.
3. Round trip transportation costs for in-warranty products will be paid by ViewSonic®.

## Limitation of implied warranties:

There are no warranties, express or implied, which extend beyond the description contained herein including the implied warranty of merchantability and fitness for a particular purpose.

## Exclusion of damages:

ViewSonic®’s liability is limited to the cost of repair or replacement of the product. ViewSonic® shall not be liable for:

1. Damage to other property caused by any defects in the product, damages based upon inconvenience, loss of use of the product, loss of time, loss of profits, loss of business opportunity, loss of goodwill, interference with business relationships, or other commercial loss, even if advised of the possibility of such damages.
2. Any other damages, whether incidental, consequential or otherwise.
3. Any claim against the customer by any other party.
4. Repair or attempted repair by anyone not authorized by ViewSonic®.

Contact Information for Sales & Authorized Service (Centro Autorizado de Servicio) within Mexico:	
<b>Name, address, of manufacturer and importers:</b> México, Av. de la Palma #8 Piso 2 Despacho 203, Corporativo Interpalmas, Col. San Fernando Huixquilucan, Estado de México Tel: (55) 3605-1099 <a href="http://www.viewsonic.com/la/soporte/index.htm">http://www.viewsonic.com/la/soporte/index.htm</a>	
NÚMERO GRATIS DE ASISTENCIA TÉCNICA PARA TODO MÉXICO: 001.866.823.2004	
<b>Hermosillo:</b> Distribuciones y Servicios Computacionales SA de CV. Calle Juarez 284 local 2 Col. Bugambilias C.P: 83140 Tel: 01-66-22-14-9005 E-Mail: <a href="mailto:disc2@hmo.megared.net.mx">disc2@hmo.megared.net.mx</a>	<b>Villahermosa:</b> Compumantenimientos Garantizados, S.A. de C.V. AV. GREGORIO MENDEZ #1504 COL, FLORIDA C.P. 86040 Tel: 01 (993) 3 52 00 47 / 3522074 / 3 52 20 09 E-Mail: <a href="mailto:compumantenimientos@prodigy.net.mx">compumantenimientos@prodigy.net.mx</a>
<b>Puebla, Pue. (Matriz):</b> RENTA Y DATOS, S.A. DE C.V. Domicilio: 29 SUR 721 COL. LA PAZ 72160 PUEBLA, PUE. Tel: 01(52).222.891.55.77 CON 10 LINEAS E-Mail: <a href="mailto:datos@puebla.megared.net.mx">datos@puebla.megared.net.mx</a>	<b>Veracruz, Ver.:</b> CONEXION Y DESARROLLO, S.A DE C.V. Av. Americas # 419 ENTRE PINZÓN Y ALVARADO Fracc. Reforma C.P. 91919 Tel: 01-22-91-00-31-67 E-Mail: <a href="mailto:gacosta@qplus.com.mx">gacosta@qplus.com.mx</a>
<b>Chihuahua:</b> Soluciones Globales en Computación C. Magisterio # 3321 Col. Magisterial Chihuahua, Chih. Tel: 4136954 E-Mail: <a href="mailto:Cefeo@soluglobales.com">Cefeo@soluglobales.com</a>	<b>Cuernavaca:</b> Compusupport de Cuernavaca SA de CV Francisco Leyva # 178 Col. Miguel Hidalgo C.P. 62040, Cuernavaca Morelos Tel: 01 777 3180579 / 01 777 3124014 E-Mail: <a href="mailto:aquevedo@compusupportcva.com">aquevedo@compusupportcva.com</a>
<b>Distrito Federal:</b> QPLUS, S.A. de C.V. Av. Coyoacán 931 Col. Del Valle 03100, México, D.F. Tel: 01(52)55-50-00-27-35 E-Mail : <a href="mailto:gacosta@qplus.com.mx">gacosta@qplus.com.mx</a>	<b>Guadalajara, Jal.:</b> SERVICRECE, S.A. de C.V. Av. Niños Héroes # 2281 Col. Arcos Sur, Sector Juárez 44170, Guadalajara, Jalisco Tel: 01(52)33-36-15-15-43 E-Mail: <a href="mailto:mmiranda@servicrece.com">mmiranda@servicrece.com</a>
<b>Guerrero Acapulco:</b> GS Computación (Grupo Sesicomp) Progreso #6-A, Colo Centro 39300 Acapulco, Guerrero Tel: 744-48-32627	<b>Monterrey:</b> Global Product Services Mar Caribe # 1987, Esquina con Golfo Pérsico Fracc. Bernardo Reyes, CP 64280 Monterrey N.L. México Tel: 8129-5103 E-Mail: <a href="mailto:aydeem@gps1.com.mx">aydeem@gps1.com.mx</a>
<b>MERIDA:</b> ELECTROSER Av Reforma No. 403Gx39 y 41 Mérida, Yucatán, México CP97000 Tel: (52) 999-925-1916 E-Mail: <a href="mailto:rrrb@sureste.com">rrrb@sureste.com</a>	<b>Oaxaca, Oax.:</b> CENTRO DE DISTRIBUCION Y SERVICIO, S.A. de C.V. Murguía # 708 P.A., Col. Centro, 68000, Oaxaca Tel: 01(52)95-15-15-22-22 Fax: 01(52)95-15-13-67-00 E-Mail: <a href="mailto:gpotai2001@hotmail.com">gpotai2001@hotmail.com</a>
<b>Tijuana:</b> STD Av Ferrocarril Sonora #3780 L-C Col 20 de Noviembre Tijuana, Mexico	<b>FOR USA SUPPORT:</b> ViewSonic® Corporation 381 Brea Canyon Road, Walnut, CA. 91789 USA Tel: 800-688-6688 E-Mail: <a href="http://www.viewsonic.com">http://www.viewsonic.com</a>



**ViewSonic®**