


Professional Advanced LCD Laser Installation Projector

Sharp A175U

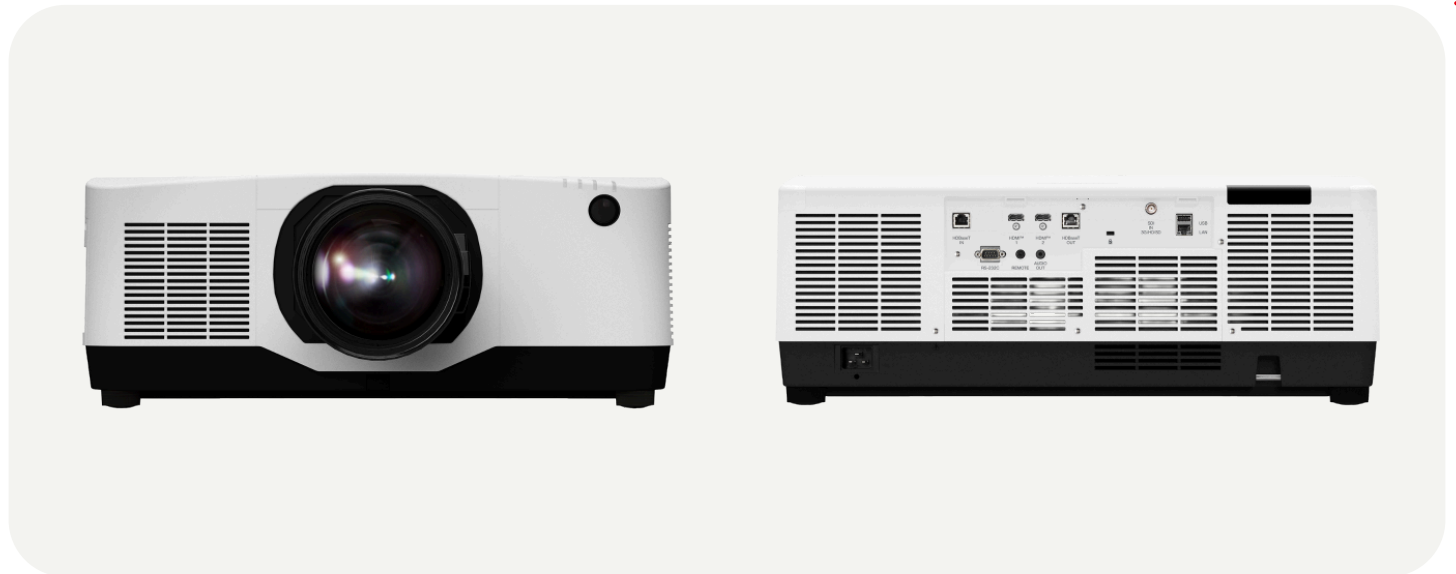

Precision, Clarity, Enduring Performance

Delivering consistent, reliable performance with vivid colour and clarity, the Sharp A Series is engineered for fixed installations that require dependable image quality and low maintenance.

With precise white point calibration and an extended colour space, the A Series uses 12-bit colour signal processing to achieve rich saturation and deep contrast, perfect for detailed visual content in education, public displays, and simulation environments. Its super-silent operation makes it well suited to acoustically sensitive spaces such as lecture halls, museums, and control rooms.

The sealed optical engine, rated IP5X against dust ingress, maintains stable image quality and sustained brightness over time. The filter-less LCD design combined with a laser light source removes the need for lamp replacements, minimising service costs and enabling up to 20,000 hours of operation.

Installation is streamlined with Sharp's ProAssist software, enabling remote setup and adjustment even when the projector is inaccessible. Wide lens shift, along with advanced features such as HDBaseT-out, blending, and stacking capabilities, ensures flexible integration in complex environments.

Benefits

No lamp replacement – up to 20,000 h maintenance free operation possible due to Laser Light Source.

No filter service required – the enhanced sealed optical laser LCD engine allows a filter-free design, IP5X rated against dust ingress. Brilliant colour brightness is maintained and servicing costs need no longer feature in your budget

Compact design – a large venue projector with a comparatively small footprint and light weight design.

Impress with vivid colour & contrast – brilliant white and wide colour space with high dynamic contrast supporting HDR10 standard via HDMI interface.

Incredible visualisation capabilities – impressive free tilt and portrait installation capability, unique geometric adjustment, tiling and camera based blending.

Specifications

Product Information

Product Name

Sharp A175U

Product Group

Professional Advanced LCD Laser Installation Projector

Order Code

XPA175U (BK), XPA175U-W (WH)

Image

Projection Technology

3LCD Technology

Native Resolution

1920 x 1200
(WUXGA)

Aspect Ratio

16:10

Contrast Ratio

3000000:1

Brightness

16000 Lm / 17000 Lm Center; compliant with ISO21118-2012

Lamp

Laser Light Source

Light Source Life [hrs]

25000¹

Lens

6 motorized lens options

Lense Adjustment

Motorized

Lens shift

Up to H:±25, V:+65,-65

Keystone Correction

+/- 40° manual horizontal / +/- 30° manual vertical

Projection Factor

depending on lens selection (std. option NP54ZL at 1.25-2.01:1)

Projection Distance [m]

0.68 – 80.77

Screen Size (diagonal) [cm] / [inch]

Maximum: 1,270 / 500"; Minimum: 152 / 60"

Zoom

Motorized

Focus Adjustment

Motorized

Supported Resolutions

1080i/50/60;	2048 x 1080 (2k);	720p/60
1080p/24/25/30/ 50/60;	2560 x 1600 (WQXGA);	
1920x1200 (WUXGA) - 640x480 (VGA);	4096 x 2160 (4k);	720p/50;

Frequency

Digital Frequency: Horizontal: 15/24 - 153 kHz; Vertical: 24-120 Hz

Connectivity

Digital

Input: 1 x 3G-SDI; 1 x HDBaseT; 2 x HDMI™ supporting HDCP 2.2
Output: 1 x HDBaseT supporting HDCP 2.2

Audio

Input: 1 x HDBaseT audio support; 2 x HDMI audio support
Output: 1 x 3.5 mm Stereo Mini Jack (variable)

Control

Input: 1 x 3.5 mm Stereo Mini Jack (Wired Remote); 1 x D-Sub 9 pin (RS-232), Ethernet

LAN

1 x RJ45

USB

1 x USB A (2A power delivery)

Remote Control

Remote Control

Audio Control; Digital Zoom; Geometric Correction; ID Select; ID set; Power (On-OFF); Select (up, down, left, right); Shutter function; Source Select; Test Picture; Zoom/Focus and Lens Shift Control

Electrical

Power Supply

100-240 V AC; 50 - 60 Hz

Power Consumption [W]

990 Normal / 890 Silent Mode / 0,5 Network Stand-by / 2,0 Stand-by

Mechanical

Dimensions (W x H x D) [mm]

599 x 238 x 490 (without lens and feet)

Weight [kg]

28.7

Fan Noise [dB (A)]

43 / 37 (Normal / Silent)

Colour Versions

Black; White

Environmental Conditions

Operating Temperature [°C]

0 to 40

Operating Humidity [%]

20 to 80 non-condensing

Storage Temperature [°C]

-10 to 50

Storage Humidity [%]

20 to 80 non-condensing

Ergonomics

Safety and Ergonomics

CE; EAC; ErP; RoHS; TUEV Type Approved

Additional Features

Special Characteristics

4K/60Hz interfaces; AMX Beacon; Cinema Quality Picture (CQP) Processing for best image quality; Crestron Connected; DICOM simulation; Digital 3D Reform™; Direct Power-Off Function; Edge Blending Function; Free Tilt; Geometric Correction; HDBaseT; HDR10 Support; High Altitude Mode; Hollywood Quality Video Processing for best image quality; HTTP Browser Control; IP5X/IP6X rated; Keystone Correction (H=±40°, V=±40°); LAN control; Lens Memory; Lens Shift (vertical 0.65 max/-0.65 max, horizontal ± +0.25 max.); Light Source Adjustment; Manual Wall Color Correction; Multi-Screen compensation mode; NaViSet Administrator 2; Optional User Logo; OSD with 27 languages; Password Security System; PIP/Side by Side, HDMI - Input; PJ LINK; Portrait Setting; Rec2020 to Rec709 colour conversion; RS-232 Control; Seamless Switching; Stacking Function; Test Pattern; Timer-Function; UHD player support; Up to 20,000 hrs Light Source Life; Virtual Remote for direct PC control

Green Features

Energy Efficiency

ECO scheduler; Intelligent power management; Less than 0.5W stand-by power; Longer light source life; Software scheduling; Timer function

Ecological Materials

100% recyclable packaging; Downloadable manuals

Ecological Standards

ErP compliant

Warranty

Projectors

3 years pan-European service

Light Source

3 years or 10000h (whatever comes first)

Shipping Content

Shipping Content

IR Remote Control (RD-480E(S)); Power Cord; Projector; Quick Setup Guide; Users Manual on CD-ROM

Optional Accessories

Optional Accessories

6 optional bayonet lenses; Universal Ceiling Mounts (PJ02UCMPF)

Lenses - motorized

XP-51ZL/NP51ZL (0.53-0.65:1); XP-52ZL/NP52ZL (0.65-0.86:1); XP-53ZL/NP53ZL (0.86-1.25:1); XP-54ZL/NP54ZL (1.24-2.01:1); XP-55ZL/NP55ZL (1.98-3.95:1); XP56ZL/NP56ZL (3.92-7.5:1)

¹ 50% of initial brightness at the end of specified laser life time at 25 degree ambient temperature.

* This product has been equipped with a laser module and is classified as Class1 of IEC60825-1 Ed3 2014 and is classified as RG2 of IEC62471-5 Ed1 2015 (changing to RG3 with the use of XP-55ZL, XP-56ZL, NP55ZL, NP56ZL lens.)
DO NOT LOOK DIRECTLY INTO THE BEAM.



ErP



CE



RoHS



TUEV Type Approved

This document is © 2026 Sharp Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 26.05.2026